
DATASHEET

1.9mm Round Subminiature “Z-Bend” Lead Infrared LED

IR91-21C/TR10



Features

- Small double-end package
- High reliability
- Low forward voltage
- Good spectral matching to Si photodetector
- Pb free
- The product itself will remain within RoHS compliant version
- Compliance with EU REACH

Descriptions

- IR91-21C/TR10(TYM) is an infrared emitting diode in miniature SMD package which is molded in a water clear plastic with spherical top view lens
- The device is spectrally matched with silicon photodiode and phototransistor

Applications

- PCB mounted infrared sensor
- Infrared emitting for miniature light barrier
- Floppy disk drive
- Optoelectronic switch
- Smoke detector


Device Selection Guide

Part Category	Chip Material	Lens Color
IR	GaAlAs	Water Clear

Copyright © 2014, Everlight All Rights Reserved. Release Date : 2015/12/4. Issue No:DIR-0000953 . Rev:6

Downloaded from Arrow.com.

Package Dimensions

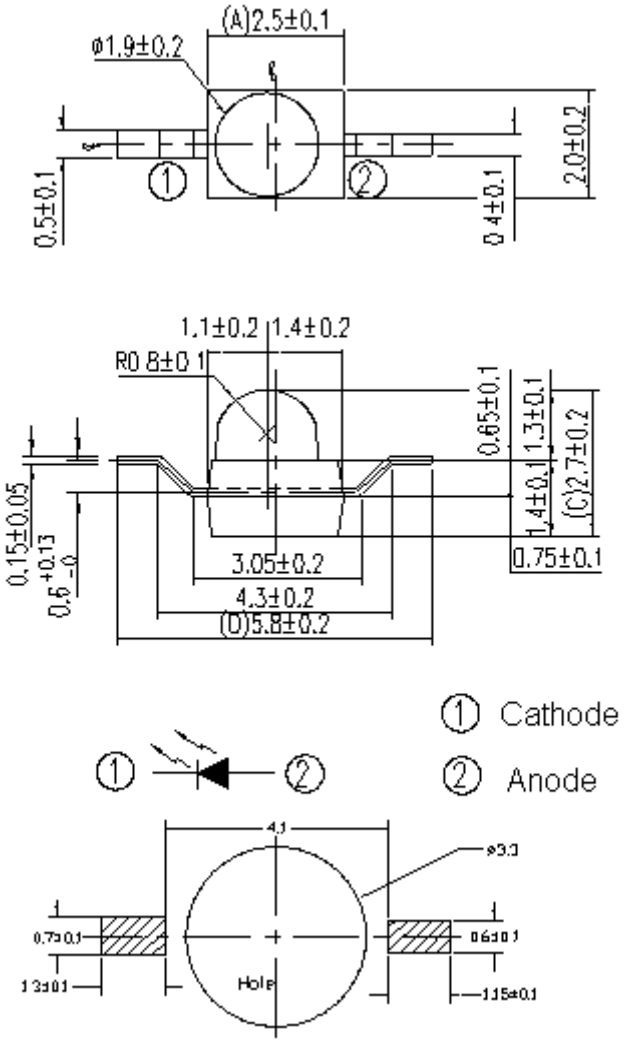

Notes: 1.All dimensions are in millimeters.
2.Tolerances unless dimensions ±0.1mm.
3.Suggested pad dimension is just for reference only.
Please modify the pad dimension based on individual need.

Copyright © 2014, Everlight All Rights Reserved. Release Date : 2015 /12/4. Issue No: DIR-0000953. Rev:6

Downloaded from Arrow.com.

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Units
Continuous Forward Current	I_F	65	mA
Reverse Voltage	V_R	5	V
Operating Temperature	T_{opr}	-25 ~ +85	℃
Storage Temperature	T_{stg}	-40 ~ +85	℃
Soldering Temperature*1	T_{sol}	260	℃
Power Dissipation at (or below) 25℃ Free Air Temperature	P_d	130	mW

Notes: *1: Soldering time≦5 second

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Radiant Intensity	I_e	I_F=20mA	3.0	5.0		mW/sr
Peak Wavelength	λ_p		--	940	--	nm
Spectral Bandwidth	$\Delta\lambda$		--	50	--	nm
Forward Voltage	V_F		--	1.2	1.5	V
View Angle	2θ1/2		--	25	--	Deg
Reverse Current	I_R	V_R=5V	--	--	10	μA
Rise Time	t_r	I_F=100mA	---	507	---	ns
Fall Time	t_f		---	517	---	

Copyright © 2014, Everlight All Rights Reserved. Release Date : 2015 /12/4. Issue No: DIR-0000953. Rev:6

Downloaded from Arrow.com.

Typical Electro-Optical Characteristics Curves

Fig.1 Forward Current vs. Ambient Temperature

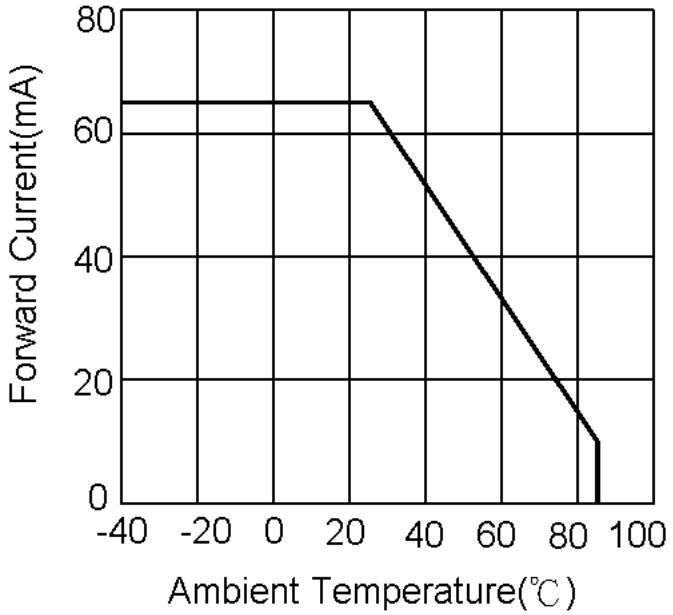


Fig.2 Spectral Distribution


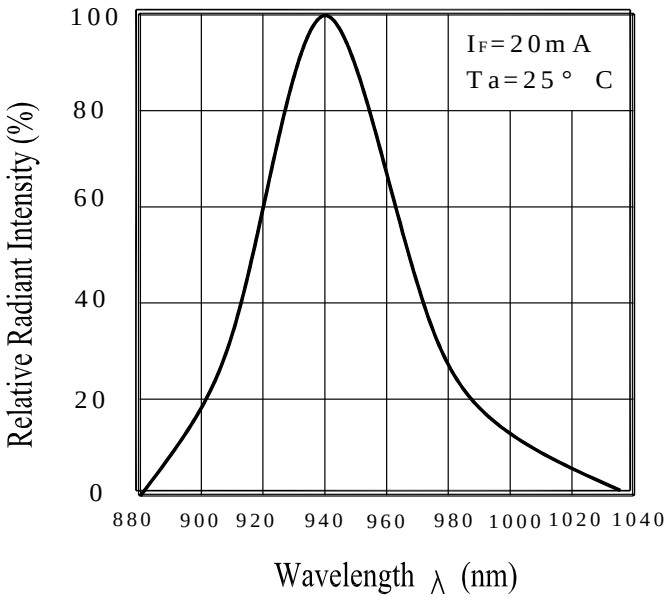


Fig.3 Forward Current vs. Forward Voltage

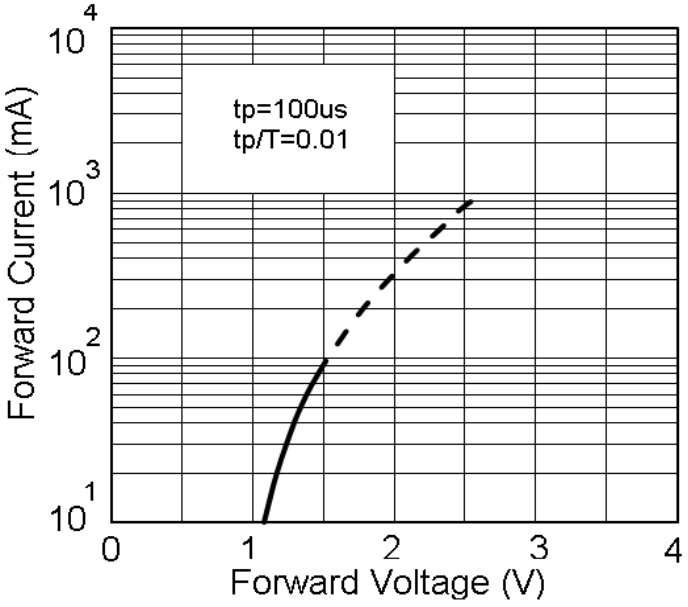


Copyright © 2014, Everlight All Rights Reserved. Release Date : 2015 /12/4. Issue No: DIR-0000953. Rev:6

Downloaded from Arrow.com.

Typical Electro-Optical Characteristics Curves

Fig.4 Relative Radiant Intensity vs.
Angular Displacement

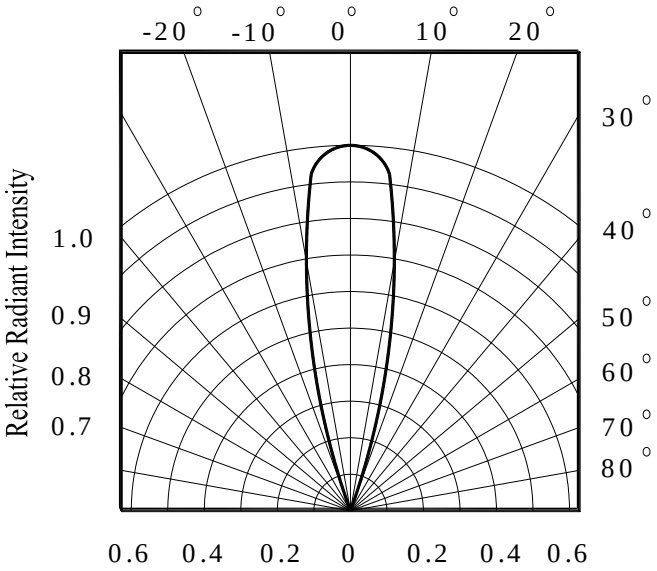

Copyright © 2014, Everlight All Rights Reserved. Release Date : 2015 /12/4. Issue No: DIR-0000953. Rev:6


Downloaded from Arrow.com.

Precautions For Use

1. Over-current-proof
   Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage
   2.1 Do not open moisture proof bag before the products are ready to use.
   2.2 Before opening the package, the LEDs should be kept at 10℃~30℃ and 90%RH or less.
   2.3 The LEDs suggested be used within one year.
   2.4 After opening the package, the devices must be stored at 10°C~30°C and ≤ 60%RH, and used within 168 hours (floor life). If unused LEDs remain, it should be stored in moisture proof packages.
   2.5 If the moisture absorbent material (desiccant material) has faded or unopened bag has exceeded the shelf life or devices (out of bag) have exceeded the floor life, baking treatment is required.
   2.6 If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure or recommend the following conditions:
   96 hours at 60°C ± 5°C and < 5 % RH (reeled/tubed/loose units)

3. Soldering Condition
   3.1 Pb-free solder temperature profile

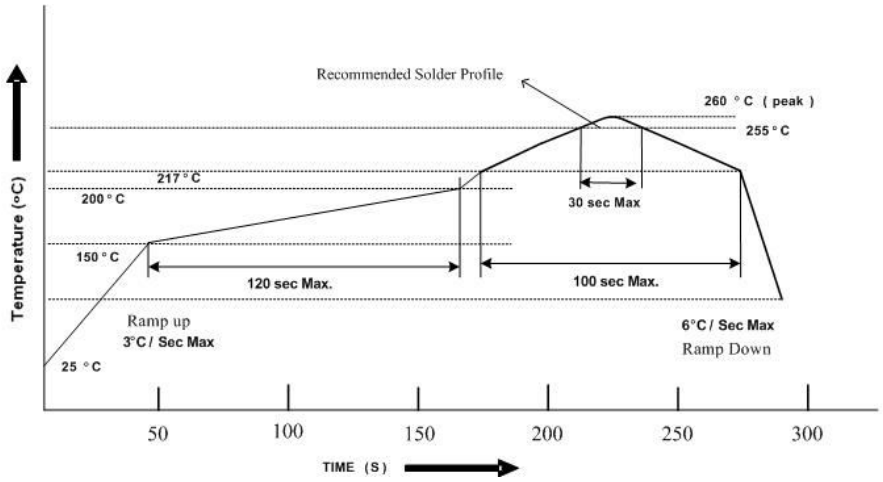

   3.2 Reflow soldering should not be done more than two times.
   3.3 When soldering, do not put stress on the LEDs during heating.
   3.4 After soldering, do not warp the circuit board.

Copyright © 2014, Everlight All Rights Reserved. Release Date : 2015 /12/4. Issue No: DIR-0000953. Rev:6


Downloaded from Arrow.com.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350℃ for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing


Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

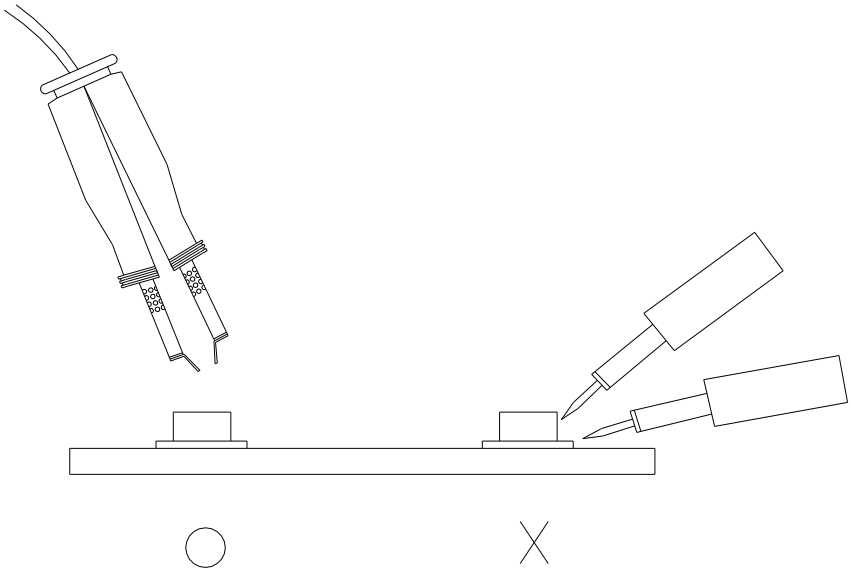

Copyright © 2014, Everlight All Rights Reserved. Release Date : 2015 /12/4. Issue No: DIR-0000953. Rev:6


Downloaded from Arrow.com.

Package Dimensions

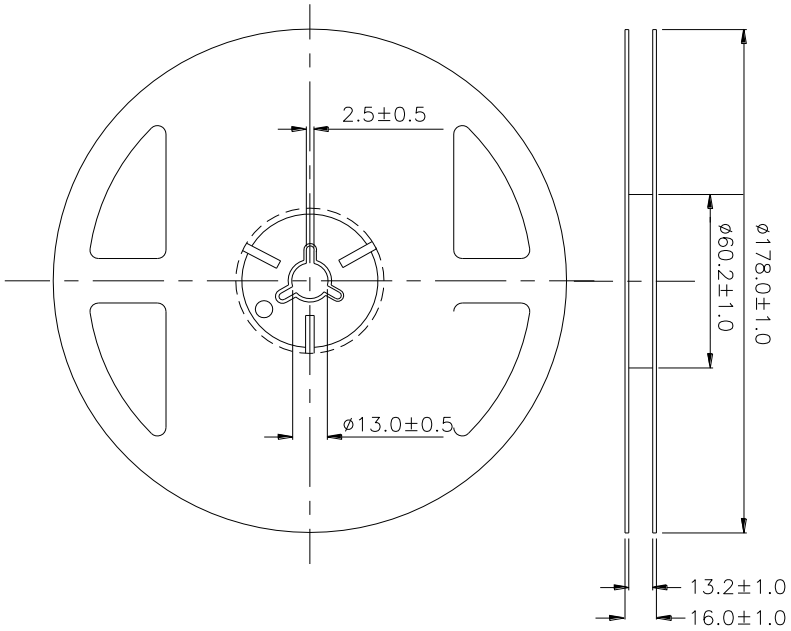

Note: The tolerances unless mentioned are ±0.1mm, Unit: mm.

Carrier Tape Dimensions:(Quantity: 1000pcs/reel)

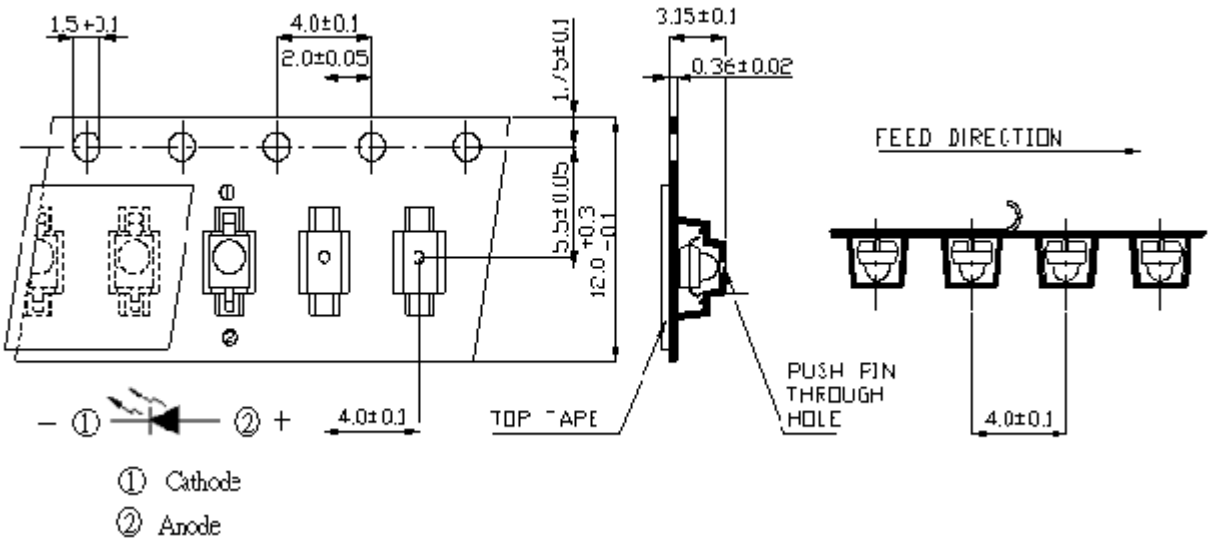

Note: The tolerances unless mentioned are ±0.1mm, Unit: mm.

Copyright © 2014, Everlight All Rights Reserved. Release Date : 2015 /12/4. Issue No: DIR-0000953. Rev:6

Downloaded from Arrow.com.

Label Form Specification



CPN: Customer's Production Number
P/N : Production Number
QTY: Packing Quantity
CAT: Ranks
HUE: Peak Wavelength
REF: Reference
LOT No: Lot Number

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.
Office: No. 6-8, Zhonghua Rd., Shulin Dist.,
New Taipei City 23860, Taiwan
Tel: 886-2-2685-6688
Fax: 886-2685-2699，6897
http://www.everlight.com

Copyright © 2014, Everlight All Rights Reserved. Release Date : 2015 /12/4. Issue No: DIR-0000953. Rev:6

Downloaded from Arrow.com.