



■ Features :

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- High efficiency up to 89%
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload / Over voltage / Over temperature
- · Built-in constant current limiting circuit
- 1U low profile 41mm
- Medical safety approved (MOOP level)
- · Built-in cooling fan ON-OFF control
- · Built-in DC OK signal
- Built-in remote ON-OFF control
- Standby 5V@0.3A
- Built-in remote sense function
- No load power consumption<0.5W (Note.6)
- 5 years warranty






User's Manual

SPECIFICATION

MODEL		MSP-300-3.3	MSP-300-5	MSP-300-7.5	MSP-300-12	MSP-300-15	MSP-300-24	MSP-300-36	MSP-300-48			
	DC VOLTAGE	3.3V	5V	7.5V	12V	15V	24V	36V	48V			
	RATED CURRENT	60A	60A	40A	27A	22A	14A	9A	7A			
	CURRENT RANGE	0 ~ 60A	0 ~ 60A	0 ~ 40A	0 ~ 27A	0 ~ 22A	0 ~ 14A	0 ~ 9A	0 ~ 7A			
	RATED POWER	198W	300W	300W	324W	330W	336W	324W	336W			
ОИТРИТ	RIPPLE & NOISE (max.) Note.2	80mVp-p	90mVp-p	100mVp-p	120mVp-p	150mVp-p	150mVp-p	250mVp-p	250mVp-p			
	VOLTAGE ADJ. RANGE	2.8 ~ 3.8V	4.3 ~ 5.8V	6.8 ~ 9V	10.2 ~ 13.8V	13.5 ~ 18V	21.6 ~ 28.8V	28.8 ~ 39.6V	40.8 ~ 55.2V			
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.3%	±0.3%	±0.2%	±0.2%	±0.2%			
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	SETUP, RISE TIME	1000ms, 50ms/230VAC 2500ms, 50ms/115VAC at full load										
	HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC at full load										
	(): /	85 ~ 264VAC 120 ~ 370VDC										
	FREQUENCY RANGE	47 ~ 63Hz										
	POWER FACTOR (Typ.)	PF>0.95/230VAC PF>0.99/115VAC at full load										
NPUT	EFFICIENCY (Typ.)	80%	82%	86%	88%	88%	87%	88%	89%			
1141 01	AC CURRENT (Typ.)	4.5A/115VAC	2.25A/230VA		10070	1 00 /0	0.70	0070	0070			
	INRUSH CURRENT (Typ.)	35A/115VAC 70A/230VAC 2.25A/230VAC										
	LEAKAGE CURRENT	Earth leakage current < 450μA/264VAC , Touch leakage current < 100μA/264VAC										
					icakage carrent	* 100 \(\mu \) 120 + 17 (C						
	OVERLOAD	105 ~ 135% rated output power Protection type: Constant current limiting, recovers automatically after fault condition is removed										
ROTECTION		3.96 ~ 4.62V	6 ~ 7V	9.4 ~ 10.9V	14.4 ~ 16.8V	18.8 ~ 21.8V	30 ~ 34.8V	41.4 ~ 48.6V	57.6 ~ 67.2			
KUIECIION	OVER VOLTAGE			1	1		00 04.00	71.7 40.00	01.0 01.2			
	OVER TEMPERATURE	Protection type: Shut down o/p voltage, re-power on to recover										
	5V STANDBY	Shut down o/p voltage, recovers automatically after temperature goes down 5VSB : 5V@0.3A; tolerance ±5%, ripple : 50mVp-p(max.)										
	DC OK SIGNAL	PSU turns on: 3.3 ~ 5.6V; PSU turns off: 0 ~ 1V										
UNCTION	REMOTE CONTROL	RC+/RC-: 4 ~ 10V or open = power on; 0 ~ 0.8V or short = power off										
	FAN CONTROL (Typ.)	Load 35±15% or RTH2≧50°C Fan on										
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")										
	WORKING HUMIDITY	20 ~ 90% RH non-condensing										
NVIRONMENT	STORAGE TEMP., HUMIDITY											
MVINONIILNI	TEMP. COEFFICIENT											
	VIBRATION	$\pm 0.03\%$ °C (0 ~ 50°C) 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes										
							OC ENVENIONO	4 DC EN/ENCOS	CO 1			
	SAFETY STANDARDS	ANSI/AAMI ES60601-1, IEC60601-1, EAC TP TC 004 approved, Design refer to BS EN/EN60601-1, BS EN/EN62368-1										
SAFETY &	ISOLATION LEVEL WITHSTAND VOLTAGE	Primary-Secondary: 2×MOOP, Primary-Earth: 1×MOOP I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC										
EMC												
Note 4)	ISOLATION RESISTANCE EMC EMISSION	,			C / 25°C / 70% RI		AC TD TO 000					
		Compliance to BS EN/EN55011 (CISPR11) Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020 Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN60601-1-2, EAC TP TC 020										
	EMC IMMUNITY			_	11, BS EN/EN60	0601-1-2, EAC 1	P TC 020					
	MTBF	176Khrs min. MIL-HDBK-217F (25°C)										
OTHERS	DIMENSION	199*105*41mr	. ,									
	PACKING		5.3Kg/0.79CUF			0.00						
NOTE	 All parameters NOT specia Ripple & noise are measure Tolerance: includes set up The power supply is considerated a 360mm*360mm metal planametal perform these EMC tests, page 1 	ed at 20MHz of tolerance, line rered a component ate with 1mm of	bandwidth by us egulation and lo ent which will be thickness. The f	sing a 12" twiste ad regulation. installed into a final equipment	d pair-wire termi final equipment. must be re-confi	nated with a 0.1 All the EMC tes rmed that it still	uf & 47uf parallests are been exemeets EMC dire	ecuted by mount ectives. For guida				

- 5. Derating may be needed under low input voltages. Please check the derating curve for more details.
 6. No load power consumption<0.5W when RC- & RC+ (CN100 pin4,6) 0 ~ 8V or short.
 7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- ** Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx



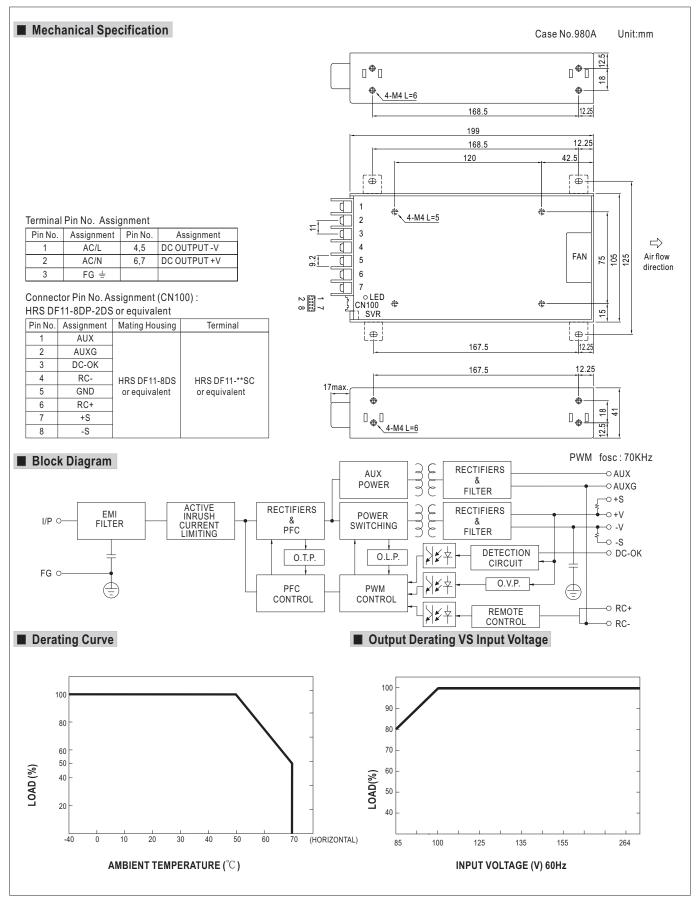




■ Function Description of CN100

Pin No.	Function	Description
1	AUX	Auxiliary voltage output, 4.75~5.25V, reference to pin 2(AUXG). The maximum load current is 0.3A. This output not controlled by the "remote ON/OFF control".
2	AUXG	Auxiliary voltage output ground. The signal return is isolated from the output terminals (+V & -V).
3	DC-OK	DC-OK signal is a TTL level signal, referenced to pin5(DC-OK GND). High when PSU turns on.
4	RC-	Remote control ground.
5	GND	This pin connects to the negative terminal(-V). Return for DC-OK signal output.
6	RC+	Turns the output on and off by electrical or dry contact between pin 4 (RC-), Short: Power OFF, Open: Power ON.
7	+S	Positive sensing. The +S signal should be connected to the positive terminal of the load. The +S and -S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V.
8	-S	Negative sensing. The -S signal should be connected to the negative terminal of the load. The -S and +S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V.

■ Function Manual

1.Remote Sense

The remote sensing compensates voltage drop on the load wiring up to 0.5 V.







Fig 1.1

2.DC-OK Signal

DC-OK signal is a TTL level signal. High when PSU turns on.

Between DC-OK(pin6) and GND(pin4)	Output Status
3.3 ~ 5.6V	ON
0 ~ 1V	OFF






Fig 2.1

CN100

-S 8


1 AUX DC-OK GND



3.Remote Control

The PSU can be turned ON/OFF by using the "Remote ON/OFF" function $% \left(\frac{1}{2}\right) =\frac{1}{2}\left(\frac{1}{2}\right) =\frac{1}{2}\left$

Between RC+(pin3) and RC-(pin5)	Output Status
SW ON (Short)	OFF
SW OFF (Open)	ON



2 AUXG RC- RC+

Fig 3.1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

MEAN WELL:

MSP-300-12 MSP-300-15 MSP-300-24 MSP-300-3.3 MSP-300-36 MSP-300-48 MSP-300-5 MSP-300-7.5