



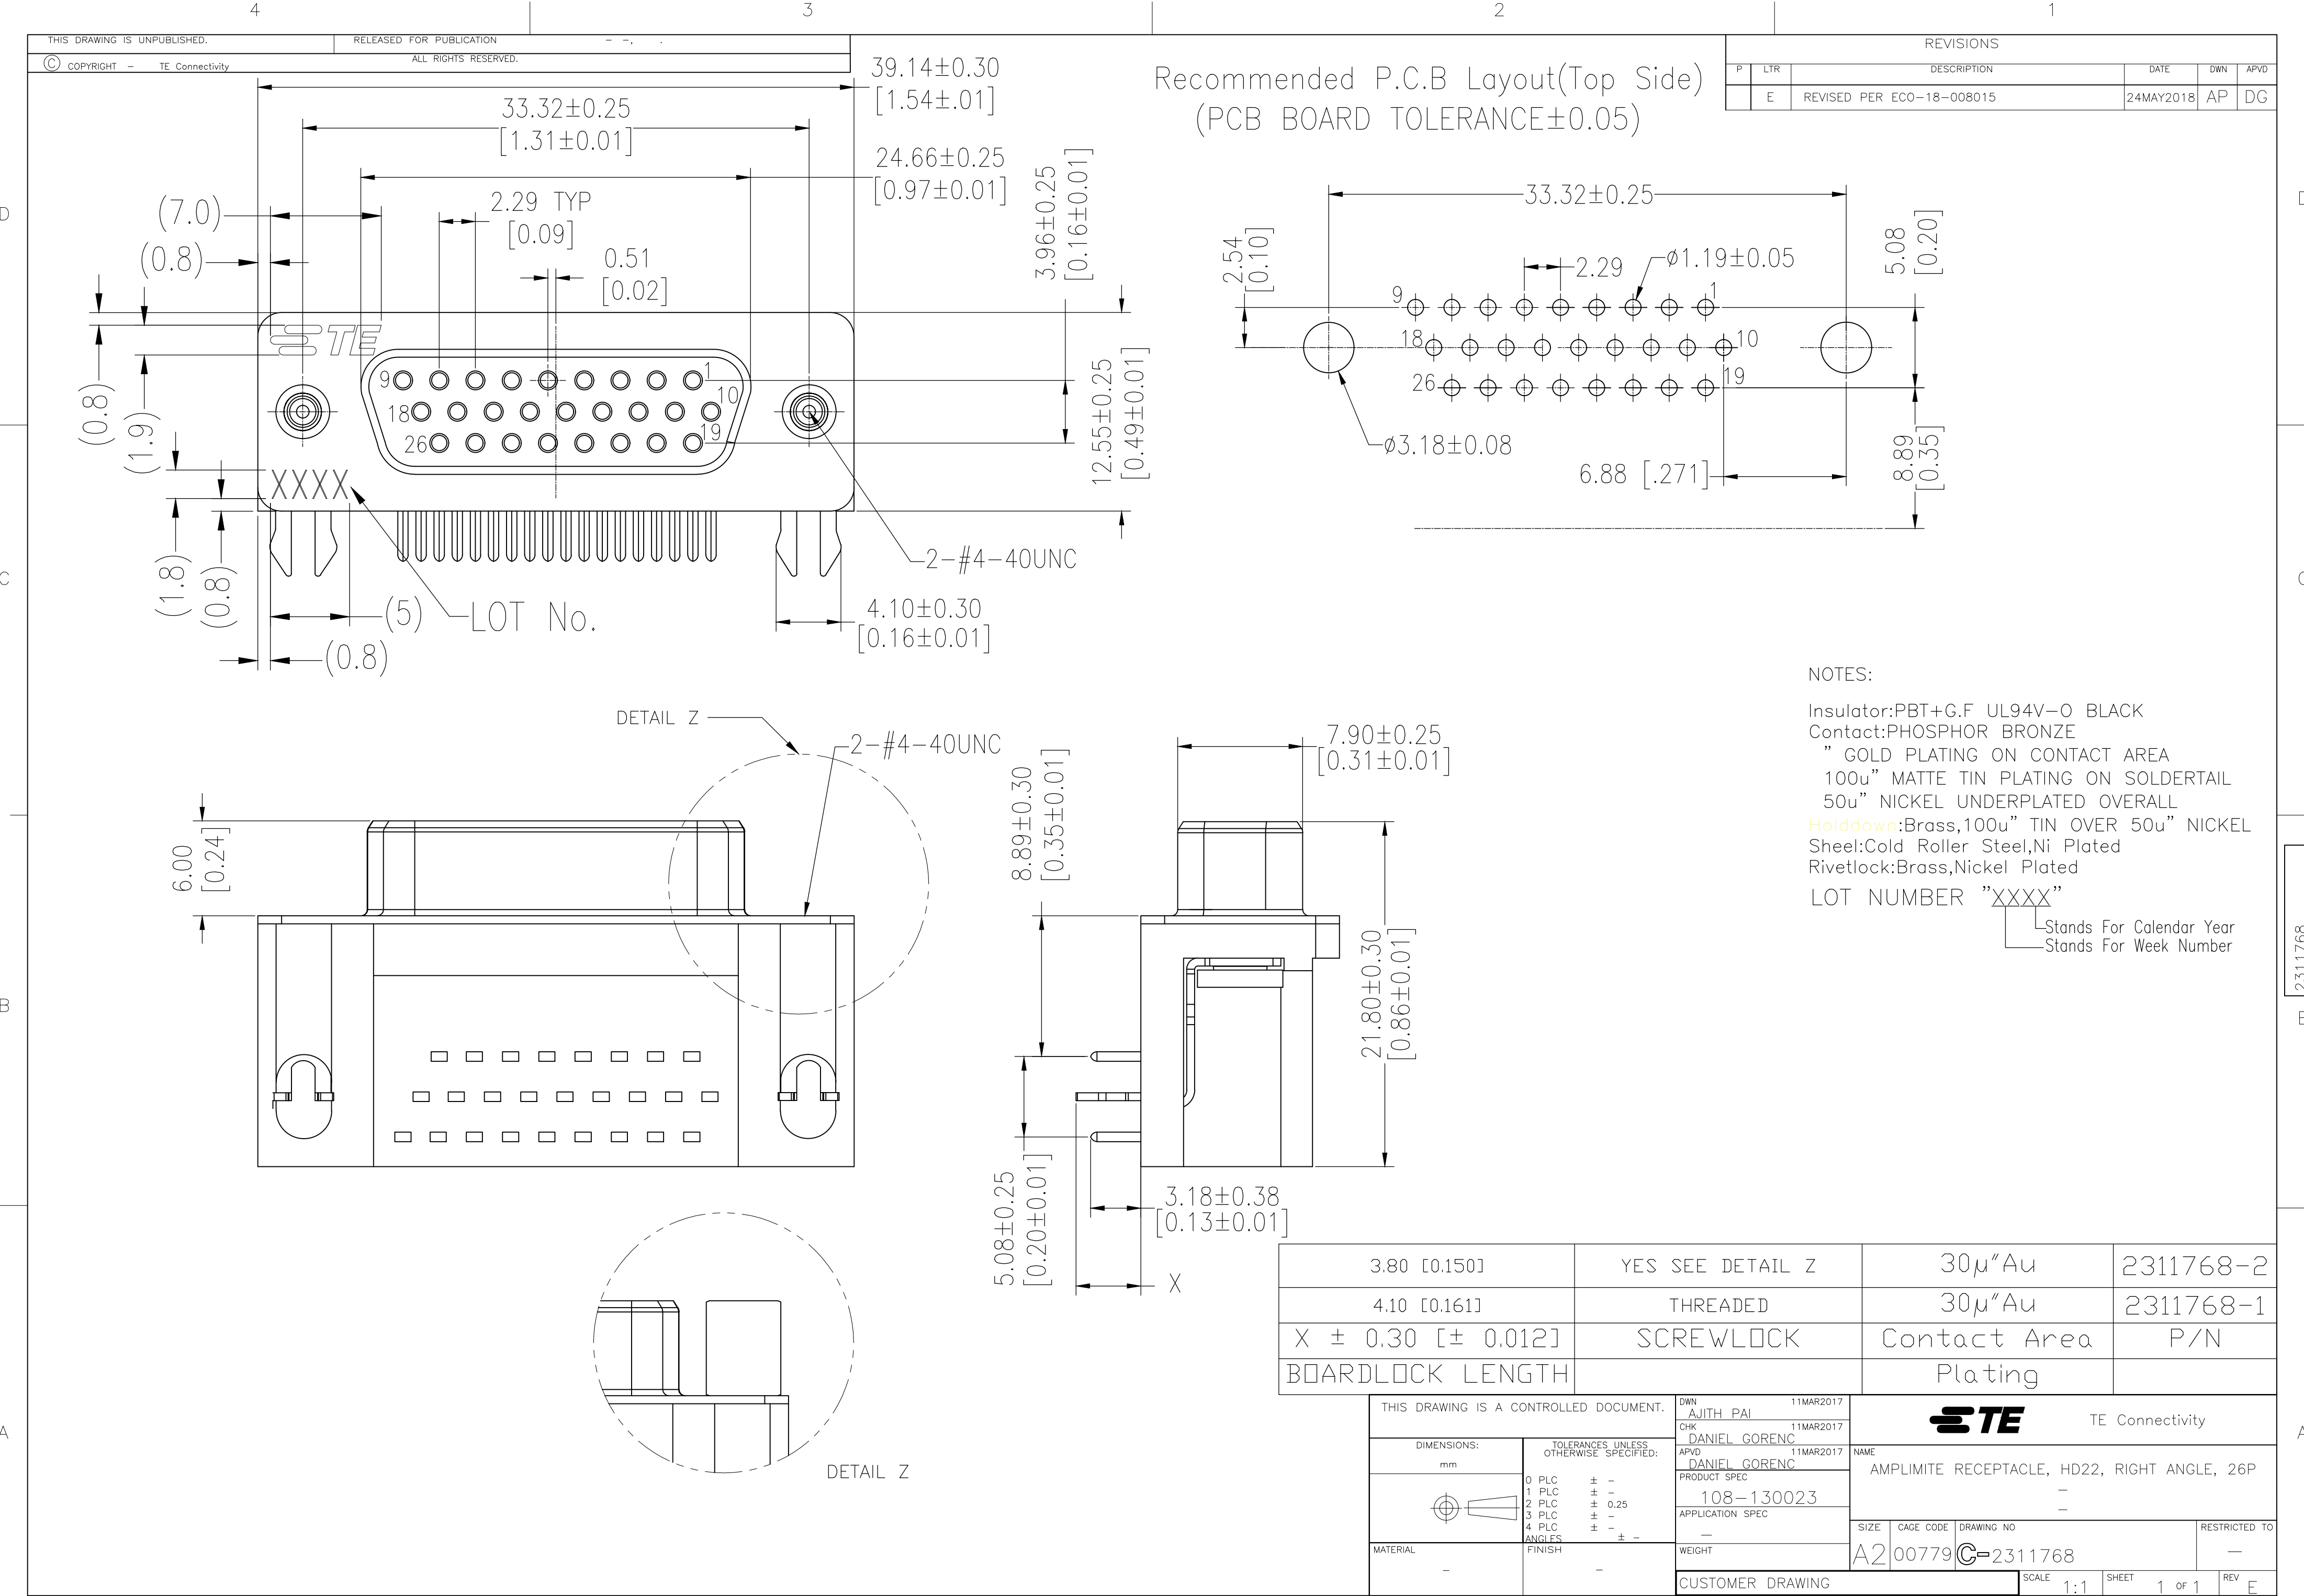

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

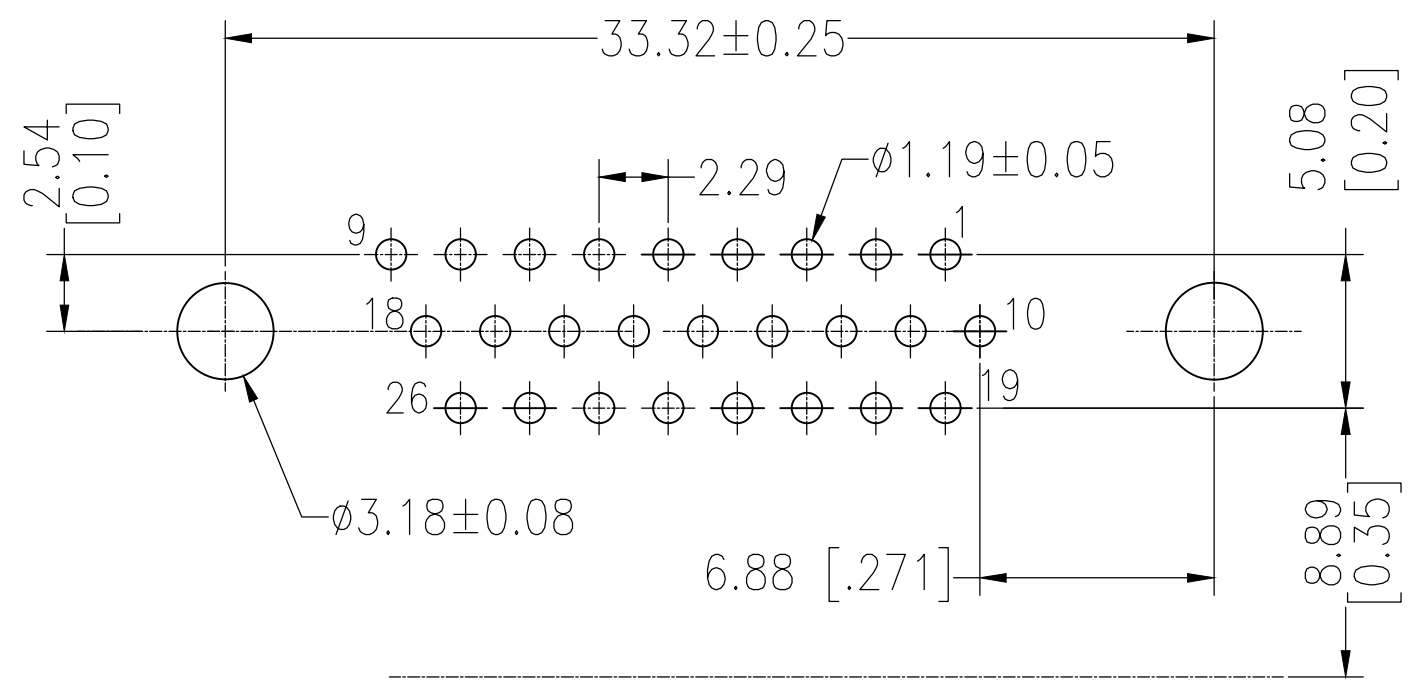

NOTES:
Insulator:PBT+G.F UL94V-O BLACK
Contact:PHOSPHOR BRONZE
" GOLD PLATING ON CONTACT AREA
100u" MATTE TIN PLATING ON SOLDER TAIL
50u" NICKEL UNDERPLATED OVERALL
Holddown:Brass,100u" TIN OVER 50u" NICKEL
Sheet:Cold Roller Steel,Ni Plated
Rivetlock:Brass,Nickel Plated
LOT NUMBER "XXXX"
Stand For Calendar Year
Stand For Week Number

3.80 [0.150]	YES SEE DETAIL Z	30μ" Au	2311768-2
4.10 [0.161]	THREADED	30μ" Au	2311768-1
X ± 0.30 [± 0.012]	SCREWLOCK	Contact Area	P/N
BOARDLOCK LENGTH		Plating	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJITH PAI 11MAR2017	TE Connectivity	
DIMENSIONS: mm		CHK DANIEL GORENC 11MAR2017		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD DANIEL GORENC 11MAR2017	NAME AMPLITE RECEPTACLE, HD22, RIGHT ANGLE, 26P	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-130023	SIZE A2	
MATERIAL -		FINISH -	CAGE CODE 00779	
		WEIGHT	DRAWING NO C=2311768	
		CUSTOMER DRAWING	RESTRICTED TO -	
		SCALE 1:1	SHEET 1 OF 1	
			REV E	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2311768-2](#)