
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	Y	REVISED PER ECO-15-010090	16JUL2015	AP	DG

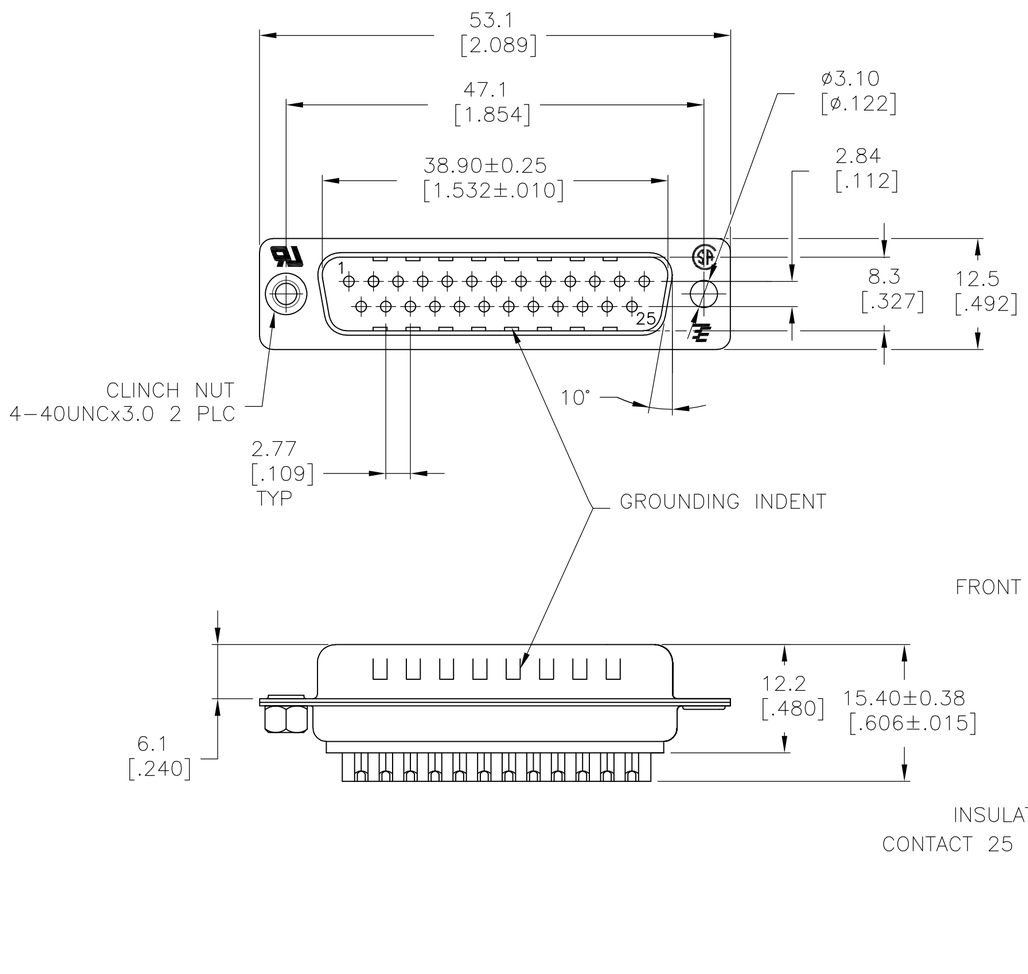

△1 MATERIAL:
FRONT INSULATOR: PBT, 30 %GF, UL94V-0, BLACK COLOR
BACK INSULATOR: PBT, 30 %GF, UL94V-0, BLACK COLOR
CONTACT: BRASS
FRONT SHELL: STEEL
BACK SHELL: STEEL
CLINCH NUTS: BRASS

△2 FINISH:
CONTACT: GOLD PLATING 0.00002[.0000008] MIN ON CONTACT AREA 0.00229 [.000090] MIN TIN-LEAD PLATING ALL OVER 0.00127[.000050] MIN NICKEL

△3 CONTACT: GOLD PLATING 0.00076[.000030] MIN ON CONTACT AREA 0.00229 [.000090] MIN TIN-LEAD PLATING ALL OVER 0.00127[.000050] MIN NICKEL

△4 SHELL: BRIGHT TIN 0.00241[.000095] MIN FULL SHELL

△5 SHELL: BLUE ZINC: 0.00508[.000200] - 0.00762[.000300] OVER ENTIRE SHELL

△6 CONTACT: GOLD PLATING 0.00002[.0000008] MIN ON CONTACT AREA 0.00229 [.000090] MIN HOT DIPPED TIN-COPPER PLATING ALL OVER 0.00127[.000050] MIN NICKEL.

△7 CLINCH NUTS: NICKEL PLATING .00305-.00508[.000120-.000200]

8 SPECIFICATION
ELECTRICAL CHARACTERISTICS: CURRENT RATING: 3 AMPERES
DIELECTRIC WITHSTANDING VOLTAGE: AC 1000V r.m.s
INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM AT DC 500V
CONTACT RESISTANCE: 10 MILLIOHMS MAXIMUM.

△9 ROHS 2002/95/EC COMPLIANT

10 PLUG ASSEMBLY MATES WITH ANY 25 POSITION RECEPTACLE IN AMPLIMITE SERIES SOLDER CUP WILL ACCOMMODATE 20 MAX AWG WIRE.

△11 CONTACT: GOLD PLATING 0.00076[.000030] MIN ON CONTACT AREA 0.00229[.000090] MIN HOT DIPPED TIN-COPPER ALL OVER 0.00127[.000050] MIN NICKEL PLATING

	PACKAGING TYPE	CLINCH NUTS △7	GROUNDING INDENTS	CONTACTS	SHELLS	PART NO.
△9	STANDARD	NO	NO	△6	△4	5-747912-4
△9	STANDARD	YES	YES	△6	△4	5-747912-7
△9	STANDARD	NO	YES	△11	△4	5-747912-5
△9	STANDARD	NO	YES	△6	△4	5-747912-2
△9	OBSOLETE	STANDARD	NO	YES	△6	△4	747912-8
	OBSOLETE	STANDARD	YES	YES	△2	△4	747912-7
	OBSOLETE	STANDARD	NO	YES	△3	△4	747912-5
	OBSOLETE	STANDARD	NO	NO	△2	△5	747912-4
	OBSOLETE	STANDARD	NO	YES	△2	△4	747912-2

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± 0.25
2 PLC ± 0.13
3 PLC ± 0.05
4 PLC ± -
ANGLES ± 4°

MATERIAL △1
FINISH SEE TABLE

DWN M.BINNER 03MAR03
CHK R.BENDORF 05MAR03
APVD R.BENDORF 05MAR03
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME PLUG ASSEMBLY, SOLDER CUP, SIZE 3, 25 POSN, HD-20, AMPLIMITE
—

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-747912	—

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV Y

747912

1471-9 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

5-747912-4