THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
G	14

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	K2	REVISED PER ECO-11-004917	11MAR11	RK	HMR

AMP WIRE RANGE	Listed	LR7189 Certified
16–14 AWG SOLID OR STRANDED	16–14 AWG SOLID OR STRANDED	16–14 AWG SOLID OR STRANDED

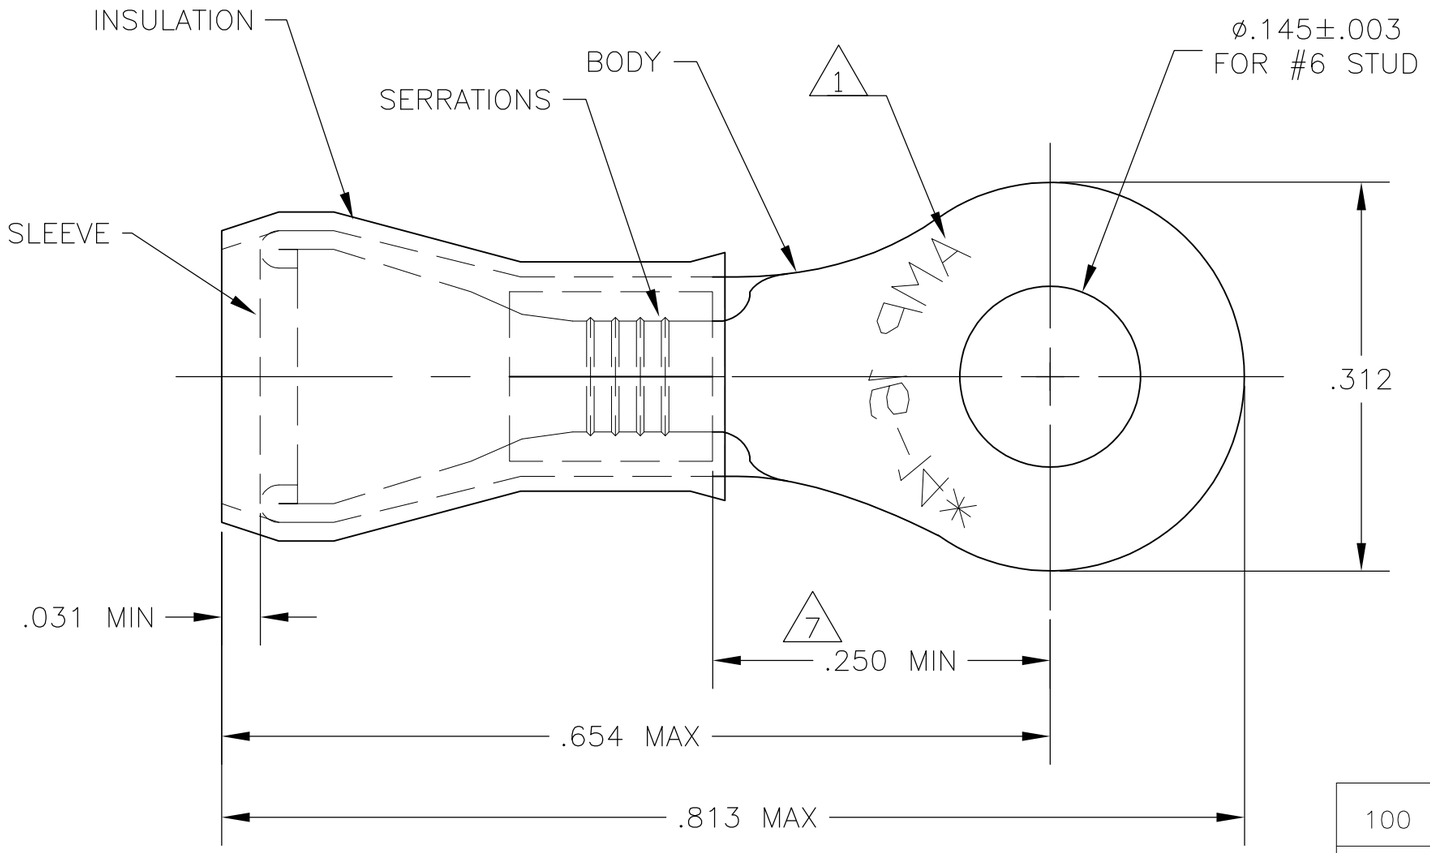

1. STAMP AMP 16–14*, APPROX AS SHOWN.
2. TONGUE THICKNESS IS .031±.002
3. FOR .115–.170 WIRE INSULATION DIA
4. MAX RECOMMENDED OPERATING TEMP IS 105°C.
5. 300 VOLT MAX RATING.
6. WIRE CROSS SECTIONAL AREA RANGE 1.04–2.62mm [2,050–5,180 CIR MILS]
7. APPLIES FROM EDGE OF METAL WIRE BBL TO CENTER OF STUD HOLE.
8. RESTRICTED PART: AMP GREAT BRITIAN LTD, USE ONLY.

QTY	PACKAGING	MATERIAL / FINISH	PART NO
100	LOOSE PIECE, BOX	BODY & SLEEVE: COPPER PER ASTM B152 TIN PL. PER ASTM B–545 INSULATION: NYLON, TYPE I, PER ASTM D4066 COLOR: BLUE	8–326882–1
5000	ON TAPE, REEL		2–326882–1
OBSOLETE ———	———		8 ~~326882–1~~
1000	LOOSE PIECE		326882

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .008
4 PLC ± –
ANGLES ± 1°

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN jr ruth 02MAR10
CHK T MICHIELUTTI 02MAR10
APVD T MICHIELUTTI 02MAR10
PRODUCT SPEC: UL486B
APPLICATION SPEC: 114–2157
WEIGHT: –

TE Connectivity

NAME: WIRE TERMINAL PIDG, RING TONGUE WIRE SIZE: 16–14

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-326882	–

CUSTOMER DRAWING | SCALE 8:1 | SHEET 1 OF 1 | REV K2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

2-326882-1