

ÖLFLEX® HEAT 125 SC

VDE tested single cores according to EN 50525-3-41 (H05Z-K & H07Z-K) for more demanding requirements


ÖLFLEX® HEAT 125 SC - halogen free single core with GL certificate, special fire performance, IEC 60332-3, suitable for +125°C

Info

CPR: Article number choice under www.lappkabel.com/cpr

VDE-tested and -marked

Improved characteristics in the event of a fire

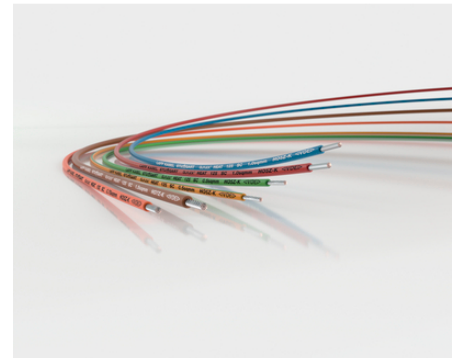

Flame-retardant



Halogen-free



Cold-resistant



Assembly time



Temperature-resistant



UV-resistant

Benefits

For safety in areas with high density of people

Reduction of flame propagation, density and toxicity of smoke gases in event of fire

Minimises damage to buildings and equipment caused by the formation of toxic acid fumes in fires

Last Update (10.12.2022)

©2022 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

ÖLFLEX® HEAT 125 SC

Certified for maritime applications

Application range

For the wiring and connection of lighting, heating appliances, control cabinets, and distributors in mechanical and plant engineering
For installation in tubes, on, in and under plaster as well as in closed installation ducts
Coil winding, electromagnets, pumps, electrical systems
Heat treatment plants, pressure die casting, heating and cooling technology
Suitable for assembling cable harnesses and wiring during switch cabinet installation

Product features

Fire behaviour:

- Flame-retardant (IEC 60332-1-2)
- Halogen-free (IEC 60754-1)
- No corrosive gases (IEC 60754-2)
- Low smoke density (IEC 61034-2)
- Low toxicity (EN 50305)

Extended fire behaviour:

H05Z-K (0,5mm² up to 1,0mm²):

see data sheet

H07Z-K (≥ 1,5mm²):

no fire propagation according to IEC 60332-3-24 respectively IEC 60332-3-25

Oil-resistant according to DIN EN 50290-2-22 (TM54)

Abrasion and notch-resistant

UV-resistant according to ISO 4892-2, method A, and ozone resistant acc. to EN 50396 resp. VDE 0473-396, method B

Norm references / Approvals

Type H05Z-K and H07Z-K according to EN 50525-3-41 with advanced features

DNV GL certificate no. TAE00003NF

Product Make-up

Fine-wire, tinned-copper conductor

Electron beam cross-linked polyolefin copolymer insulation

Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000993 ETIM 5.0 Class-Description: Single core cable
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000993 ETIM 6.0 Class-Description: Single core cable
Conductor stranding:	Fine wire acc. to VDE 0295, class 5 / IEC 60228 class 5 from 0.5 mm ²
Minimum bending radius:	Fixed installation: 4 x outer diameter
Nominal voltage:	Up to 1.0mm ² U0/U 300/500 V From 1.5mm ² U0/U 450/750 V 0.6/1kV from 1.5 mm ² in the case of fixed and protected installation
Test voltage:	4000 V
Temperature range:	Fixed installation: -55 °C to +125 °C Temporary (3.000h): up to +145 °C

Last Update (10.12.2022)

©2022 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

ÖLFLEX® HEAT 125 SC

Note

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.

Copper price basis: EUR 150/100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.

Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths

Packaging size: coil ≤ 30 kg or ≤ 250 m, otherwise drum

Please specify the preferred type of packaging (e.g. 1 x 500 m drum or 5 x 100 m coils).

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

Article number	Conductor cross-section (mm ²)	Outer diameter [mm]	Core colour	m/ring	m/box	Copper
ÖLFLEX® HEAT 125 SC - H05Z-K - U ₀ /U: 300/500 V						
1232000	0.5	2.2	green/yellow	100	-	4.8
1232001	0.5	2.2	black	100	-	4.8
1232002	0.5	2.2	blue	100	-	4.8
1232003	0.5	2.2	brown	100	-	4.8
1232005	0.5	2.2	yellow	100	-	4.8
1232006	0.5	2.2	green	100	-	4.8
1232007	0.5	2.2	violet	100	-	4.8
1232009	0.5	2.2	orange	100	-	4.8
1232104	0.5	2.2	red	100	-	4.8
1232105	0.5	2.2	white	100	-	4.8
1232106	0.5	2.2	grey	100	-	4.8
1232114	0.5	2.2	dark blue	100	-	4.8
1232001K	0.5	2.2	black	-	3000	4.8
1233000	0.75	2.4	green/yellow	100	-	7.2
1233001	0.75	2.4	black	100	-	7.2
1233002	0.75	2.4	blue	100	-	7.2
1233003	0.75	2.4	brown	100	-	7.2
1233005	0.75	2.4	yellow	100	-	7.2
1233006	0.75	2.4	green	100	-	7.2
1233007	0.75	2.4	violet	100	-	7.2
1233009	0.75	2.4	orange	100	-	7.2
1233104	0.75	2.4	red	100	-	7.2
1233105	0.75	2.4	white	100	-	7.2
1233106	0.75	2.4	grey	100	-	7.2
1233114	0.75	2.4	dark blue	100	-	7.2
1233003K	0.75	2.4	brown	-	2500	7.2
1233001K	0.75	2.4	black	-	2500	7.2
1233106K	0.75	2.4	grey	-	2500	7.2
1233002K	0.75	2.4	blue	-	2500	7.2
1233009K	0.75	2.4	orange	-	2500	7.2
1233114K	0.75	2.4	dark blue	-	2500	7.2
1233105K	0.75	2.4	white	-	2500	7.2
1233104K	0.75	2.4	red	-	2500	7.2

Last Update (10.12.2022)
 ©2022 Lapp Group - Technical changes reserved
 Product Management www.lappkabel.de
 You can find the current technical data in the corresponding data sheet.
 PN 0456 / 02_03.16

Article number	Conductor cross-section (mm ²)	Outer diameter [mm]	Core colour	m/ring	m/box	Copper
1234000	1.0	2.5	green/yellow	100	-	9.6
1234001	1.0	2.5	black	100	-	9.6
1234002	1.0	2.5	blue	100	-	9.6
1234003	1.0	2.5	brown	100	-	9.6
1234005	1.0	2.5	yellow	100	-	9.6
1234006	1.0	2.5	green	100	-	9.6
1234007	1.0	2.5	violet	100	-	9.6
1234009	1.0	2.5	orange	100	-	9.6
1234104	1.0	2.5	red	100	-	9.6
1234105	1.0	2.5	white	100	-	9.6
1234106	1.0	2.5	grey	100	-	9.6
1234114	1.0	2.5	dark blue	100	-	9.6
1234003K	1.0	2.5	brown	-	2500	9.6
1234001K	1.0	2.5	black	-	2500	9.6
1234106K	1.0	2.5	grey	-	2500	9.6
1234002K	1.0	2.5	blue	-	2500	9.6
1234000K	1.0	2.5	green/yellow	-	2500	9.6
1234009K	1.0	2.5	orange	-	2500	9.6
1234114K	1.0	2.5	dark blue	-	2500	9.6
1234105K	1.0	2.5	white	-	2500	9.6
1234104K	1.0	2.5	red	-	2500	9.6
ÖLFLEX® HEAT 125 SC - H07Z-K - U ₀ /U: 450/750 V						
1235000	1.5	3	green/yellow	100	-	14.4
1235001	1.5	3	black	100	-	14.4
1235002	1.5	3	blue	100	-	14.4
1235003	1.5	3	brown	100	-	14.4
1235005	1.5	3	yellow	100	-	14.4
1235006	1.5	3	green	100	-	14.4
1235007	1.5	3	violet	100	-	14.4
1235009	1.5	3	orange	100	-	14.4
1235104	1.5	3	red	100	-	14.4
1235105	1.5	3	white	100	-	14.4
1235106	1.5	3	grey	100	-	14.4
1235114	1.5	3	dark blue	100	-	14.4

Last Update (10.12.2022)
 ©2022 Lapp Group - Technical changes reserved
 Product Management www.lappkabel.de
 You can find the current technical data in the corresponding data sheet.
 PN 0456 / 02_03.16

Article number	Conductor cross-section (mm ²)	Outer diameter [mm]	Core colour	m/ring	m/box	Copper
1235003K	1.5	3	brown	-	2000	14.4
1235001K	1.5	3	black	-	2000	14.4
1235106K	1.5	3	grey	-	2000	14.4
1235002K	1.5	3	blue	-	2000	14.4
1235000K	1.5	3	green/yellow	-	2000	14.4
1235009K	1.5	3	orange	-	2000	14.4
1235114K	1.5	3	dark blue	-	2000	14.4
1235105K	1.5	3	white	-	2000	14.4
1235104K	1.5	3	red	-	2000	14.4
1236000	2.5	3.6	green/yellow	100	-	24
1236001	2.5	3.6	black	100	-	24
1236002	2.5	3.6	blue	100	-	24
1236003	2.5	3.6	brown	100	-	24
1236005	2.5	3.6	yellow	100	-	24
1236006	2.5	3.6	green	100	-	24
1236007	2.5	3.6	violet	100	-	24
1236009	2.5	3.6	orange	100	-	24
1236104	2.5	3.6	red	100	-	24
1236105	2.5	3.6	white	100	-	24
1236106	2.5	3.6	grey	100	-	24
1236114	2.5	3.6	dark blue	100	-	24
1236001K	2.5	3.6	black	-	1200	24
1237000	4.0	4.3	green/yellow	100	-	38.4
1237001	4.0	4.3	black	100	-	38.4
1237002	4.0	4.3	blue	100	-	38.4
1237003	4.0	4.3	brown	100	-	38.4
1237009	4.0	4.3	orange	100	-	38.4
1237104	4.0	4.3	red	100	-	38.4
1237105	4.0	4.3	white	100	-	38.4
1237106	4.0	4.3	grey	100	-	38.4
1237114	4.0	4.3	dark blue	100	-	38.4
1238000	6.0	4.8	green/yellow	100	-	57.6
1238001	6.0	4.8	black	100	-	57.6
1238002	6.0	4.8	blue	100	-	57.6

Last Update (10.12.2022)
 ©2022 Lapp Group - Technical changes reserved
 Product Management www.lappkabel.de
 You can find the current technical data in the corresponding data sheet.
 PN 0456 / 02_03.16

Article number	Conductor cross-section (mm ²)	Outer diameter [mm]	Core colour	m/ring	m/box	Copper
1238003	6.0	4.8	brown	100	-	57.6
1238104	6.0	4.8	red	100	-	57.6
1238106	6.0	4.8	grey	100	-	57.6
1238114	6.0	4.8	dark blue	100	-	57.6
1239000	10.0	6.2	green/yellow	100	-	96
1239001	10.0	6.2	black	100	-	96
1239002	10.0	6.2	blue	100	-	96
1239003	10.0	6.2	brown	100	-	96
1239104	10.0	6.2	red	100	-	96
1240000	16.0	7.2	green/yellow	100	-	153.6
1240001	16.0	7.2	black	100	-	153.6
1240002	16.0	7.2	blue	100	-	153.6
1240003	16.0	7.2	brown	100	-	153.6
1240104	16.0	7.2	red	100	-	153.6
1240114	16.0	7.2	dark blue	100	-	153.6
1241000	25.0	8.9	green/yellow	100	-	240
1241001	25.0	8.9	black	100	-	240
1242000	35.0	10.1	green/yellow	100	-	336
1242001	35.0	10.1	black	100	-	336
1243000	50.0	12.5	green/yellow	100	-	480
1243001	50.0	12.5	black	100	-	480
1244000	70.0	14.2	green/yellow	100	-	672
1244001	70.0	14.2	black	100	-	672
1245000	95.0	16.6	green/yellow	100	-	912
1245001	95.0	16.6	black	100	-	912
1246001	120.0	18.2	black	100	-	1152
1247000	150.0	20.6	green/yellow	100	-	1440
1247001	150.0	20.6	black	100	-	1440
1248001	185.0	22.5	black	100	-	1776
1249001	240.0	26.4	black	100	-	2304

Last Update (10.12.2022)
 ©2022 Lapp Group - Technical changes reserved
 Product Management www.lappkabel.de
 You can find the current technical data in the corresponding data sheet.
 PN 0456 / 02_03.16