74AUP1G74-Q100

Low-power D-type flip-flop with set and reset; positive-edge trigger

Rev. 2 — 10 April 2017 Product data sheet

1 General description

The 74AUP1G74-Q100 provides a low-power, low-voltage single positive-edge triggered D-type flip-flop with individual data (D), clock (CP), set ($\overline{S}$D) and reset ($\overline{R}$D) inputs and complementary Q and $\overline{Q}$ outputs. The $\overline{S}$D and $\overline{R}$D are asynchronous active LOW inputs and operate independently of the clock input. Information on the data input is transferred to the Q output on the LOW-to-HIGH transition of the clock pulse. The D input must be stable one set-up time prior to the LOW-to-HIGH clock transition for predictable operation.

Schmitt trigger action at all inputs makes the circuit tolerant to slower input rise and fall times across the entire V_{CC} range from 0.8 V to 3.6 V.

This device ensures a very low static and dynamic power consumption across the entire V_{CC} range from 0.8 V to 3.6 V.

This device is fully specified for partial power-down applications using I_{OFF}. The I_{OFF} circuitry disables the output, preventing the damaging backflow current through the device when it is powered down.

This product has been qualified to the Automotive Electronics Council (AEC) standard Q100 (Grade 1) and is suitable for use in automotive applications.

2 Features and benefits

- Automotive product qualification in accordance with AEC-Q100 (Grade 1)
  - Specified from -40 °C to +85 °C and from -40 °C to +125 °C
- Wide supply voltage range from 0.8 V to 3.6 V
- High noise immunity
- Complies with JEDEC standards:
  - JESD8-12 (0.8 V to 1.3 V)
  - JESD8-11 (0.9 V to 1.65 V)
  - JESD8-7 (1.2 V to 1.95 V)
  - JESD8-5 (1.8 V to 2.7 V)
  - JESD8-B (2.7 V to 3.6 V)
- ESD protection:
  - MIL-STD-883, method 3015 Class 3A. Exceeds 5000 V
  - HBM JESD22-A114F Class 3A. Exceeds 5 000 V
  - MM JESD22-A115-A exceeds 200 V (C = 200 pF, R = 0 Ω)
- Low static power consumption; I_{CC} = 0.9 µA (maximum)
- Latch-up performance exceeds 100 mA per JESD 78 Class II
- Inputs accept voltages up to 3.6 V
- Low noise overshoot and undershoot < 10 % of V_{CC}
- I_{OFF} circuitry provides partial power-down mode operation

nexperia

3 Ordering information

Table 1. Ordering information

Type number	Package			
	Temperature range	Name	Description	Version
74AUP1G74DC-Q100	-40 °C to +125 °C	VSSOP8	plastic very thin shrink small outline package; 8 leads; body width 2.3 mm	SOT765-1

4 Marking

Table 2. Marking codes

Type number	Marking code[1]
74AUP1G74DC-Q100	p74

[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.

5 Functional diagram




Figure 1. Logic symbol




Figure 2. IEC logic symbol

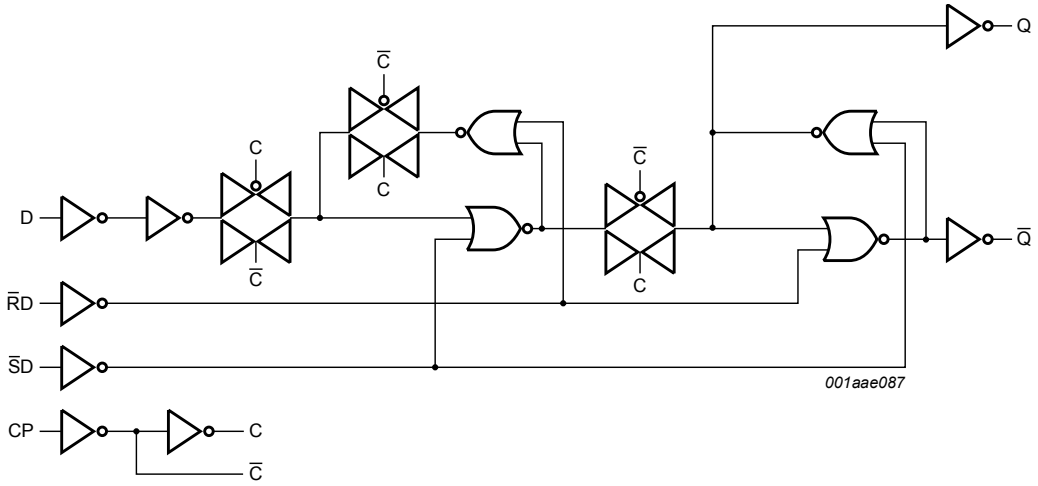


Figure 3. Logic diagram

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

6 Pinning information

6.1 Pinning




Figure 4. Pin configuration SOT765-1

6.2 Pin description

Table 3. Pin description

Symbol	Pin	Description
CP	1	clock input
D	2	data input
$\overline{Q}$	3	complement output
GND	4	ground (0 V)
Q	5	true output
$\overline{RD}$	6	asynchronous reset input (active LOW)
$\overline{SD}$	7	asynchronous set input (active LOW)
V_{CC}	8	supply voltage

7 Functional description

Table 4. Function table for asynchronous operation [1]

Input				Output	
$\overline{SD}$	$\overline{RD}$	CP	D	Q	$\overline{Q}$
L	H	X	X	H	L
H	L	X	X	L	H
L	L	X	X	H	H

[1] H = HIGH voltage level;
L = LOW voltage level;
X = don't care.

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Table 5. Function table for synchronous operation [1]

Input				Output	
$\overline{SD}$	$\overline{RD}$	CP	D	Q_{n+1}	$\overline{Q}_{n+1}$
H	H	↑	L	L	H
H	H	↑	H	H	L

[1] H = HIGH voltage level;
L = LOW voltage level;
↑ = LOW-to-HIGH CP transition;
Q_{n+1} = state after the next LOW-to-HIGH CP transition.

8 Limiting values

Table 6. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Max	Unit
V_{CC}	supply voltage			-0.5	+4.6	V
V_I	input voltage		[1]	-0.5	+4.6	V
V_O	output voltage	Active mode and Power-down mode	[1]	-0.5	+4.6	V
I_{IK}	input clamping current	V_I < 0 V		-50	-	mA
I_{OK}	output clamping current	V_O < 0 V		-50	-	mA
I_O	output current	V_O = 0 V to V_{CC}		-	±20	mA
I_{CC}	supply current			-	+50	mA
I_{GND}	ground current			-50	-	mA
T_{stg}	storage temperature			-65	+150	°C
P_{tot}	total power dissipation	T_{amb} = -40 °C to +125 °C	[2]	-	250	mW

[1] The minimum input and output voltage ratings may be exceeded if the input and output current ratings are observed.
[2] For VSSOP8 packages: above 110 °C the value of P_{tot} derates linearly with 8.0 mW/K.

9 Recommended operating conditions

Table 7. Operating conditions

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		0.8	3.6	V
V_I	input voltage		0	3.6	V
V_O	output voltage	Active mode	0	V_{CC}	V
		Power-down mode; V_{CC} = 0 V	0	3.6	V
T_{amb}	ambient temperature		-40	+125	°C
Δt/ΔV	input transition rise and fall rate	V_{CC} = 0.8 V to 3.6 V	-	200	ns/V

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

10 Static characteristics

Table 8. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T_{amb} = 25 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 0.8 V	0.70 × V_{CC}	-	-	V
		V_{CC} = 0.9 V to 1.95 V	0.65 × V_{CC}	-	-	V
		V_{CC} = 2.3 V to 2.7 V	1.6	-	-	V
		V_{CC} = 3.0 V to 3.6 V	2.0	-	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 0.8 V	-	-	0.30 × V_{CC}	V
		V_{CC} = 0.9 V to 1.95 V	-	-	0.35 × V_{CC}	V
		V_{CC} = 2.3 V to 2.7 V	-	-	0.7	V
		V_{CC} = 3.0 V to 3.6 V	-	-	0.9	V
V_{OH}	HIGH-level output voltage	V_I = V_{IH} or V_{IL}				
		I_O = -20 µA; V_{CC} = 0.8 V to 3.6 V	V_{CC} - 0.1	-	-	V
		I_O = -1.1 mA; V_{CC} = 1.1 V	0.75 × V_{CC}	-	-	V
		I_O = -1.7 mA; V_{CC} = 1.4 V	1.11	-	-	V
		I_O = -1.9 mA; V_{CC} = 1.65 V	1.32	-	-	V
		I_O = -2.3 mA; V_{CC} = 2.3 V	2.05	-	-	V
		I_O = -3.1 mA; V_{CC} = 2.3 V	1.9	-	-	V
		I_O = -2.7 mA; V_{CC} = 3.0 V	2.72	-	-	V
		I_O = -4.0 mA; V_{CC} = 3.0 V	2.6	-	-	V
V_{OL}	LOW-level output voltage	V_I = V_{IH} or V_{IL}				
		I_O = 20 µA; V_{CC} = 0.8 V to 3.6 V	-	-	0.1	V
		I_O = 1.1 mA; V_{CC} = 1.1 V	-	-	0.3 × V_{CC}	V
		I_O = 1.7 mA; V_{CC} = 1.4 V	-	-	0.31	V
		I_O = 1.9 mA; V_{CC} = 1.65 V	-	-	0.31	V
		I_O = 2.3 mA; V_{CC} = 2.3 V	-	-	0.31	V
		I_O = 3.1 mA; V_{CC} = 2.3 V	-	-	0.44	V
		I_O = 2.7 mA; V_{CC} = 3.0 V	-	-	0.31	V
		I_O = 4.0 mA; V_{CC} = 3.0 V	-	-	0.44	V
I_I	input leakage current	V_I = GND to 3.6 V; V_{CC} = 0 V to 3.6 V	-	-	±0.1	µA
I_{OFF}	power-off leakage current	V_I or V_O = 0 V to 3.6 V; V_{CC} = 0 V	-	-	±0.2	µA
ΔI_{OFF}	additional power-off leakage current	V_I or V_O = 0 V to 3.6 V; V_{CC} = 0 V to 0.2 V	-	-	±0.2	µA
I_{CC}	supply current	V_I = GND or V_{CC}; I_O = 0 A; V_{CC} = 0.8 V to 3.6 V	-	-	0.5	µA

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
ΔI_{CC}	additional supply current	$V_I = V_{CC}$ - 0.6 V; I_O = 0 A; V_{CC} = 3.3 V; per pin [1]	-	-	40	µA
C_I	input capacitance	V_{CC} = 0 V to 3.6 V; V_I = GND or V_{CC}	-	0.6	-	pF
C_O	output capacitance	V_O = GND; V_{CC} = 0 V	-	1.3	-	pF
T_{amb} = -40 °C to +85 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 0.8 V	0.70 × V_{CC}	-	-	V
		V_{CC} = 0.9 V to 1.95 V	0.65 × V_{CC}	-	-	V
		V_{CC} = 2.3 V to 2.7 V	1.6	-	-	V
		V_{CC} = 3.0 V to 3.6 V	2.0	-	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 0.8 V	-	-	0.30 × V_{CC}	V
		V_{CC} = 0.9 V to 1.95 V	-	-	0.35 × V_{CC}	V
		V_{CC} = 2.3 V to 2.7 V	-	-	0.7	V
		V_{CC} = 3.0 V to 3.6 V	-	-	0.9	V
V_{OH}	HIGH-level output voltage	$V_I = V_{IH}$ or V_{IL}				
		I_O = -20 µA; V_{CC} = 0.8 V to 3.6 V	V_{CC} - 0.1	-	-	V
		I_O = -1.1 mA; V_{CC} = 1.1 V	0.7 × V_{CC}	-	-	V
		I_O = -1.7 mA; V_{CC} = 1.4 V	1.03	-	-	V
		I_O = -1.9 mA; V_{CC} = 1.65 V	1.30	-	-	V
		I_O = -2.3 mA; V_{CC} = 2.3 V	1.97	-	-	V
		I_O = -3.1 mA; V_{CC} = 2.3 V	1.85	-	-	V
		I_O = -2.7 mA; V_{CC} = 3.0 V	2.67	-	-	V
		I_O = -4.0 mA; V_{CC} = 3.0 V	2.55	-	-	V
V_{OL}	LOW-level output voltage	$V_I = V_{IH}$ or V_{IL}				
		I_O = 20 µA; V_{CC} = 0.8 V to 3.6 V	-	-	0.1	V
		I_O = 1.1 mA; V_{CC} = 1.1 V	-	-	0.3 × V_{CC}	V
		I_O = 1.7 mA; V_{CC} = 1.4 V	-	-	0.37	V
		I_O = 1.9 mA; V_{CC} = 1.65 V	-	-	0.35	V
		I_O = 2.3 mA; V_{CC} = 2.3 V	-	-	0.33	V
		I_O = 3.1 mA; V_{CC} = 2.3 V	-	-	0.45	V
		I_O = 2.7 mA; V_{CC} = 3.0 V	-	-	0.33	V
		I_O = 4.0 mA; V_{CC} = 3.0 V	-	-	0.45	V
I_I	input leakage current	V_I = GND to 3.6 V; V_{CC} = 0 V to 3.6 V	-	-	±0.5	µA
I_{OFF}	power-off leakage current	V_I or V_O = 0 V to 3.6 V; V_{CC} = 0 V	-	-	±0.5	µA
ΔI_{OFF}	additional power-off leakage current	V_I or V_O = 0 V to 3.6 V; V_{CC} = 0 V to 0.2 V	-	-	±0.6	µA
I_{CC}	supply current	V_I = GND or V_{CC}; I_O = 0 A; V_{CC} = 0.8 V to 3.6 V	-	-	0.9	µA

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
ΔI_{CC}	additional supply current	$V_I = V_{CC}$ - 0.6 V; I_O = 0 A; V_{CC} = 3.3 V; per pin [1]	-	-	50	µA
T_{amb} = -40 °C to +125 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 0.8 V	0.75 × V_{CC}	-	-	V
		V_{CC} = 0.9 V to 1.95 V	0.70 × V_{CC}	-	-	V
		V_{CC} = 2.3 V to 2.7 V	1.6	-	-	V
		V_{CC} = 3.0 V to 3.6 V	2.0	-	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 0.8 V	-	-	0.25 × V_{CC}	V
		V_{CC} = 0.9 V to 1.95 V	-	-	0.30 × V_{CC}	V
		V_{CC} = 2.3 V to 2.7 V	-	-	0.7	V
		V_{CC} = 3.0 V to 3.6 V	-	-	0.9	V
V_{OH}	HIGH-level output voltage	$V_I = V_{IH}$ or V_{IL}				
		I_O = -20 µA; V_{CC} = 0.8 V to 3.6 V	V_{CC} - 0.11	-	-	V
		I_O = -1.1 mA; V_{CC} = 1.1 V	0.6 × V_{CC}	-	-	V
		I_O = -1.7 mA; V_{CC} = 1.4 V	0.93	-	-	V
		I_O = -1.9 mA; V_{CC} = 1.65 V	1.17	-	-	V
		I_O = -2.3 mA; V_{CC} = 2.3 V	1.77	-	-	V
		I_O = -3.1 mA; V_{CC} = 2.3 V	1.67	-	-	V
		I_O = -2.7 mA; V_{CC} = 3.0 V	2.40	-	-	V
		I_O = -4.0 mA; V_{CC} = 3.0 V	2.30	-	-	V
V_{OL}	LOW-level output voltage	$V_I = V_{IH}$ or V_{IL}				
		I_O = 20 µA; V_{CC} = 0.8 V to 3.6 V	-	-	0.11	V
		I_O = 1.1 mA; V_{CC} = 1.1 V	-	-	0.33 × V_{CC}	V
		I_O = 1.7 mA; V_{CC} = 1.4 V	-	-	0.41	V
		I_O = 1.9 mA; V_{CC} = 1.65 V	-	-	0.39	V
		I_O = 2.3 mA; V_{CC} = 2.3 V	-	-	0.36	V
		I_O = 3.1 mA; V_{CC} = 2.3 V	-	-	0.50	V
		I_O = 2.7 mA; V_{CC} = 3.0 V	-	-	0.36	V
		I_O = 4.0 mA; V_{CC} = 3.0 V	-	-	0.50	V
I_I	input leakage current	V_I = GND to 3.6 V; V_{CC} = 0 V to 3.6 V	-	-	±0.75	µA
I_{OFF}	power-off leakage current	V_I or V_O = 0 V to 3.6 V; V_{CC} = 0 V	-	-	±0.75	µA
ΔI_{OFF}	additional power-off leakage current	V_I or V_O = 0 V to 3.6 V; V_{CC} = 0 V to 0.2 V	-	-	±0.75	µA
I_{CC}	supply current	V_I = GND or V_{CC}; I_O = 0 A; V_{CC} = 0.8 V to 3.6 V	-	-	1.4	µA
ΔI_{CC}	additional supply current	$V_I = V_{CC}$ - 0.6 V; I_O = 0 A; V_{CC} = 3.3 V; per pin [1]	-	-	75	µA

[1] One input at V_{CC} - 0.6 V, other input at V_{CC} or GND.

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

11 Dynamic characteristics

Table 9. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V); for test circuit see Figure 7.

Symbol	Parameter	Conditions	T_{amb} = 25 °C			T_{amb} = -40 °C to +85 °C		T_{amb} = -40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	Min	Max	
C_L = 5 pF										
t_{pd}	propagation delay	CP to Q, $\overline{Q}$; see Figure 5. [2]								
		V_{CC} = 0.8 V	-	25.4	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	2.9	6.7	14.0	2.6	14.2	2.6	14.2	ns
		V_{CC} = 1.4 V to 1.6 V	2.4	4.5	7.6	2.3	8.3	2.3	8.6	ns
		V_{CC} = 1.65 V to 1.95 V	1.9	3.5	5.7	1.7	6.5	1.7	6.8	ns
		V_{CC} = 2.3 V to 2.7 V	1.7	2.6	3.8	1.4	4.4	1.4	4.7	ns
		V_{CC} = 3.0 V to 3.6 V	1.5	2.2	3.1	1.2	3.4	1.2	3.7	ns
		$\overline{SD}$ to Q, $\overline{Q}$; see Figure 6. [2]								
		V_{CC} = 0.8 V	-	19.6	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	2.7	5.6	11.0	2.5	11.4	2.5	11.5	ns
		V_{CC} = 1.4 V to 1.6 V	2.4	4.0	6.3	2.2	6.9	2.2	7.3	ns
		V_{CC} = 1.65 V to 1.95 V	2.0	3.3	4.9	1.7	5.6	1.7	5.9	ns
		V_{CC} = 2.3 V to 2.7 V	1.9	2.7	3.7	1.7	4.0	1.7	4.2	ns
		V_{CC} = 3.0 V to 3.6 V	1.8	2.5	3.2	1.5	3.6	1.5	3.8	ns
		$\overline{RD}$ to Q, $\overline{Q}$; see Figure 6. [2]								
		V_{CC} = 0.8 V	-	19.2	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	2.6	5.5	11.0	2.5	11.3	2.5	11.5	ns
		V_{CC} = 1.4 V to 1.6 V	2.3	3.9	6.3	2.2	6.8	2.2	7.3	ns
		V_{CC} = 1.65 V to 1.95 V	1.9	3.2	5.0	1.8	5.6	1.8	5.9	ns
		V_{CC} = 2.3 V to 2.7 V	1.9	2.6	3.6	1.7	4.1	1.7	4.3	ns
		V_{CC} = 3.0 V to 3.6 V	1.8	2.4	3.3	1.5	3.6	1.5	3.8	ns
f_{max}	maximum frequency	CP; see Figure 5.								
		V_{CC} = 0.8 V	-	53	-	-	-	-	-	MHz
		V_{CC} = 1.1 V to 1.3 V	-	203	-	170	-	170	-	MHz
		V_{CC} = 1.4 V to 1.6 V	-	347	-	310	-	300	-	MHz
		V_{CC} = 1.65 V to 1.95 V	-	435	-	400	-	390	-	MHz
		V_{CC} = 2.3 V to 2.7 V	-	550	-	490	-	480	-	MHz
		V_{CC} = 3.0 V to 3.6 V	-	619	-	550	-	510	-	MHz
C_L = 10 pF										
t_{pd}	propagation delay	CP to Q, $\overline{Q}$; see Figure 5. [2]								
		V_{CC} = 0.8 V	-	28.9	-	-	-	-	-	ns

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Symbol	Parameter	Conditions	T_{amb} = 25 °C			T_{amb} = -40 °C to +85 °C		T_{amb} = -40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	Min	Max	
		V_{CC} = 1.1 V to 1.3 V	3.1	7.5	15.8	2.9	16.1	2.9	16.1	ns
		V_{CC} = 1.4 V to 1.6 V	2.7	5.1	8.7	2.4	9.4	2.4	9.8	ns
		V_{CC} = 1.65 V to 1.95 V	2.5	4.1	6.5	2.2	7.2	2.2	7.6	ns
		V_{CC} = 2.3 V to 2.7 V	2.0	3.2	4.6	1.8	5.3	1.8	5.6	ns
		V_{CC} = 3.0 V to 3.6 V	1.8	2.8	3.8	1.6	4.1	1.6	4.4	ns
		$\overline{SD}$ to Q, $\overline{Q}$; see Figure 6. [2]								
		V_{CC} = 0.8 V	-	23.2	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	2.9	6.5	12.9	2.8	13.3	2.8	13.5	ns
		V_{CC} = 1.4 V to 1.6 V	2.7	4.6	7.5	2.3	7.9	2.3	8.3	ns
		V_{CC} = 1.65 V to 1.95 V	2.6	3.9	5.6	2.3	6.3	2.3	6.6	ns
		V_{CC} = 2.3 V to 2.7 V	2.3	3.2	4.4	2.0	4.8	2.0	5.2	ns
		V_{CC} = 3.0 V to 3.6 V	2.2	3.0	3.9	1.9	4.2	1.9	4.4	ns
		$\overline{RD}$ to Q, $\overline{Q}$; see Figure 6. [2]								
		V_{CC} = 0.8 V	-	22.7	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	2.8	6.4	12.8	2.7	13.2	2.7	13.4	ns
		V_{CC} = 1.4 V to 1.6 V	2.6	4.5	7.5	2.3	8.1	2.3	8.4	ns
		V_{CC} = 1.65 V to 1.95 V	2.5	3.3	5.8	2.3	6.3	2.3	6.7	ns
		V_{CC} = 2.3 V to 2.7 V	2.2	3.2	4.4	2.0	4.9	2.0	5.2	ns
		V_{CC} = 3.0 V to 3.6 V	2.0	2.9	4.0	1.9	4.3	1.9	4.5	ns
f_{max}	maximum frequency	CP; see Figure 5.								
		V_{CC} = 0.8 V	-	52	-	-	-	-	-	MHz
		V_{CC} = 1.1 V to 1.3 V	-	192	-	150	-	150	-	MHz
		V_{CC} = 1.4 V to 1.6 V	-	324	-	280	-	230	-	MHz
		V_{CC} = 1.65 V to 1.95 V	-	421	-	310	-	250	-	MHz
		V_{CC} = 2.3 V to 2.7 V	-	486	-	370	-	360	-	MHz
		V_{CC} = 3.0 V to 3.6 V	-	550	-	410	-	360	-	MHz
C_L = 15 pF										
t_{pd}	propagation delay	CP to Q, $\overline{Q}$; see Figure 5. [2]								
		V_{CC} = 0.8 V	-	32.4	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	3.5	8.3	17.6	3.3	17.8	3.3	18.0	ns
		V_{CC} = 1.4 V to 1.6 V	3.2	5.6	9.5	2.8	10.5	2.8	11.1	ns
		V_{CC} = 1.65 V to 1.95 V	2.7	4.6	7.2	2.5	8.1	2.5	8.6	ns
		V_{CC} = 2.3 V to 2.7 V	2.4	3.6	5.2	2.2	5.8	2.2	6.2	ns
		V_{CC} = 3.0 V to 3.6 V	2.2	3.2	4.4	2.0	4.9	2.0	5.2	ns
		$\overline{SD}$ to Q, $\overline{Q}$; see Figure 6. [2]								

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Symbol	Parameter	Conditions	T_{amb} = 25 °C			T_{amb} = -40 °C to +85 °C		T_{amb} = -40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	Min	Max	
		V_{CC} = 0.8 V	-	26.7	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	3.3	7.3	14.7	3.1	15.2	3.1	15.4	ns
		V_{CC} = 1.4 V to 1.6 V	3.2	5.2	8.3	2.9	9.0	2.9	9.5	ns
		V_{CC} = 1.65 V to 1.95 V	2.8	4.3	6.4	2.5	7.1	2.5	7.5	ns
		V_{CC} = 2.3 V to 2.7 V	2.8	3.7	5.1	2.2	5.5	2.2	5.8	ns
		V_{CC} = 3.0 V to 3.6 V	2.5	3.5	4.6	2.4	5.0	2.4	5.2	ns
		$\overline{RD}$ to Q, $\overline{Q}$; see Figure 6. [2]								
		V_{CC} = 0.8 V	-	26.1	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	3.2	7.2	14.5	3.1	15.0	3.1	15.2	ns
		V_{CC} = 1.4 V to 1.6 V	3.1	5.1	8.4	2.7	9.2	2.7	9.7	ns
		V_{CC} = 1.65 V to 1.95 V	2.7	4.3	6.5	2.6	7.3	2.6	7.7	ns
		V_{CC} = 2.3 V to 2.7 V	2.6	3.6	5.0	2.4	5.5	2.4	5.8	ns
		V_{CC} = 3.0 V to 3.6 V	2.4	3.4	4.6	2.3	5.0	2.3	5.2	ns
f_{max}	maximum frequency	CP; see Figure 5.								
		V_{CC} = 0.8 V	-	50	-	-	-	-	-	MHz
		V_{CC} = 1.1 V to 1.3 V	-	181	-	120	-	120	-	MHz
		V_{CC} = 1.4 V to 1.6 V	-	301	-	190	-	160	-	MHz
		V_{CC} = 1.65 V to 1.95 V	-	407	-	240	-	190	-	MHz
		V_{CC} = 2.3 V to 2.7 V	-	422	-	300	-	270	-	MHz
		V_{CC} = 3.0 V to 3.6 V	-	481	-	320	-	300	-	MHz
C_L = 30 pF										
t_{pd}	propagation delay	CP to Q, $\overline{Q}$; see Figure 5. [2]								
		V_{CC} = 0.8 V	-	42.7	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	4.2	10.6	22.5	4.0	23.0	4.0	23.3	ns
		V_{CC} = 1.4 V to 1.6 V	3.7	7.2	12.0	3.7	13.3	3.7	14.0	ns
		V_{CC} = 1.65 V to 1.95 V	3.5	5.8	9.2	3.4	10.4	3.4	11.0	ns
		V_{CC} = 2.3 V to 2.7 V	3.3	4.7	6.6	3.0	7.3	3.0	7.8	ns
		V_{CC} = 3.0 V to 3.6 V	3.0	4.3	5.8	2.8	6.8	2.8	7.3	ns
		$\overline{SD}$ to Q, $\overline{Q}$; see Figure 6. [2]								
		V_{CC} = 0.8 V	-	37.0	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	4.0	9.5	19.8	3.8	20.8	3.8	21.1	ns
		V_{CC} = 1.4 V to 1.6 V	3.8	6.7	10.9	3.7	12.0	3.7	12.7	ns
		V_{CC} = 1.65 V to 1.95 V	3.7	5.6	8.4	3.5	9.3	3.5	9.9	ns
		V_{CC} = 2.3 V to 2.7 V	3.7	4.8	6.6	3.2	7.2	3.2	7.6	ns
		V_{CC} = 3.0 V to 3.6 V	3.4	4.6	6.0	3.1	6.8	3.1	7.1	ns

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Symbol	Parameter	Conditions	T_{amb} = 25 °C			T_{amb} = -40 °C to +85 °C		T_{amb} = -40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	Min	Max	
		$\overline{RD}$ to Q, $\overline{Q}$; see Figure 6. [2]								
		V_{CC} = 0.8 V	-	36.4	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	3.9	9.4	19.5	3.8	20.2	3.8	20.5	ns
		V_{CC} = 1.4 V to 1.6 V	3.6	6.6	10.9	3.7	12.0	3.7	12.6	ns
		V_{CC} = 1.65 V to 1.95 V	3.5	5.5	8.5	3.5	9.5	3.5	10.1	ns
		V_{CC} = 2.3 V to 2.7 V	3.5	4.7	6.5	3.2	7.1	3.2	7.6	ns
		V_{CC} = 3.0 V to 3.6 V	3.3	4.4	6.1	3.1	7.1	3.1	7.5	ns
f_{max}	maximum frequency	CP; see Figure 5.								
		V_{CC} = 0.8 V	-	28	-	-	-	-	-	MHz
		V_{CC} = 1.1 V to 1.3 V	-	145	-	70	-	70	-	MHz
		V_{CC} = 1.4 V to 1.6 V	-	185	-	120	-	110	-	MHz
		V_{CC} = 1.65 V to 1.95 V	-	270	-	150	-	120	-	MHz
		V_{CC} = 2.3 V to 2.7 V	-	290	-	190	-	170	-	MHz
		V_{CC} = 3.0 V to 3.6 V	-	315	-	200	-	190	-	MHz
C_L = 5 pF, 10 pF, 15 pF and 30 pF										
t_{su}	set-up time	D to CP HIGH; see Figure 5.								
		V_{CC} = 0.8 V	-	3.4	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	-	0.6	-	1.2	-	1.2	-	ns
		V_{CC} = 1.4 V to 1.6 V	-	0.3	-	0.6	-	0.6	-	ns
		V_{CC} = 1.65 V to 1.95 V	-	0.4	-	0.5	-	0.5	-	ns
		V_{CC} = 2.3 V to 2.7 V	-	0.2	-	0.4	-	0.4	-	ns
		V_{CC} = 3.0 V to 3.6 V	-	0.3	-	0.4	-	0.4	-	ns
		D to CP LOW; see Figure 5.								
		V_{CC} = 0.8 V	-	3.0	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	-	0.5	-	1.2	-	1.2	-	ns
		V_{CC} = 1.4 V to 1.6 V	-	0.3	-	0.7	-	0.7	-	ns
		V_{CC} = 1.65 V to 1.95 V	-	0.4	-	0.7	-	0.7	-	ns
		V_{CC} = 2.3 V to 2.7 V	-	0.5	-	0.7	-	0.7	-	ns
		V_{CC} = 3.0 V to 3.6 V	-	0.6	-	0.8	-	0.8	-	ns
t_h	hold time	D to CP; see Figure 5.								
		V_{CC} = 0.8 V	-	-1.9	-	-	-	-	-	ns
		V_{CC} = 1.1 V to 1.3 V	-	-0.3	-	0.5	-	0.5	-	ns
		V_{CC} = 1.4 V to 1.6 V	-	-0.2	-	0.2	-	0.2	-	ns

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Symbol	Parameter	Conditions	T_{amb} = 25 °C			T_{amb} = -40 °C to +85 °C		T_{amb} = -40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	Min	Max	
		V_{CC} = 1.65 V to 1.95 V	-	-0.2	-	0.1	-	0.1	-	ns
		V_{CC} = 2.3 V to 2.7 V	-	-0.2	-	0.1	-	0.1	-	ns
		V_{CC} = 3.0 V to 3.6 V	-	-0.2	-	0.1	-	0.1	-	ns
t_{rec}	recovery time	$\overline{RD}$; see Figure 6								
		V_{CC} = 1.1 V to 1.3 V	-	-0.5	-	-0.9	-	-0.9	-	ns
		V_{CC} = 1.4 V to 1.6 V	-	-0.2	-	-0.6	-	-0.6	-	ns
		V_{CC} = 1.65 V to 1.95 V	-	-0.2	-	-0.4	-	-0.4	-	ns
		V_{CC} = 2.3 V to 2.7 V	-	-0.1	-	-0.1	-	-0.1	-	ns
		V_{CC} = 3.0 V to 3.6 V	-	-0.1	-	-0.1	-	-0.1	-	ns
		$\overline{SD}$; see Figure 6.								
		V_{CC} = 1.1 V to 1.3 V	-	-0.5	-	-0.3	-	-0.3	-	ns
		V_{CC} = 1.4 V to 1.6 V	-	-0.4	-	-0.1	-	-0.1	-	ns
		V_{CC} = 1.65 V to 1.95 V	-	-0.3	-	0	-	0	-	ns
		V_{CC} = 2.3 V to 2.7 V	-	-0.2	-	0.1	-	0.1	-	ns
		V_{CC} = 3.0 V to 3.6 V	-	-0.1	-	0.1	-	0.1	-	ns
t_W	pulse width	CP HIGH or LOW; see Figure 5.								
		V_{CC} = 1.1 V to 1.3 V	-	2.1	-	2.7	-	2.7	-	ns
		V_{CC} = 1.4 V to 1.6 V	-	1.1	-	1.5	-	1.5	-	ns
		V_{CC} = 1.65 V to 1.95 V	-	0.9	-	1.6	-	1.6	-	ns
		V_{CC} = 2.3 V to 2.7 V	-	0.6	-	1.7	-	1.7	-	ns
		V_{CC} = 3.0 V to 3.6 V	-	0.6	-	1.9	-	1.9	-	ns
		$\overline{SD}$ or $\overline{RD}$ LOW; see Figure 6.								
		V_{CC} = 1.1 V to 1.3 V	-	4.2	-	11.3	-	11.5	-	ns
		V_{CC} = 1.4 V to 1.6 V	-	2.3	-	6.2	-	6.4	-	ns
		V_{CC} = 1.65 V to 1.95 V	-	1.8	-	4.8	-	5.0	-	ns
		V_{CC} = 2.3 V to 2.7 V	-	1.2	-	3.3	-	3.5	-	ns
		V_{CC} = 3.0 V to 3.6 V	-	1.1	-	2.6	-	2.8	-	ns
C_{PD}	power dissipation capacitance	f_i = 1 MHz; V_I = GND to V_{CC} [3]								
		V_{CC} = 0.8 V	-	2.8	-	-	-	-	-	pF
		V_{CC} = 1.1 V to 1.3 V	-	2.9	-	-	-	-	-	pF
		V_{CC} = 1.4 V to 1.6 V	-	3.0	-	-	-	-	-	pF
		V_{CC} = 1.65 V to 1.95 V	-	3.0	-	-	-	-	-	pF
		V_{CC} = 2.3 V to 2.7 V	-	3.5	-	-	-	-	-	pF


All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Symbol	Parameter	Conditions	T_{amb} = 25 °C			T_{amb} = -40 °C to +85 °C		T_{amb} = -40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	Min	Max	
		V_{CC} = 3.0 V to 3.6 V	-	3.9	-	-	-	-	-	pF

[1] All typical values are measured at nominal V_{CC}.
[2] t_{pd} is the same as t_{PLH} and t_{PHL}.
[3] C_{PD} is used to determine the dynamic power dissipation (P_D in µW).
$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$ where:
f_i = input frequency in MHz;
f_o = output frequency in MHz;
C_L = output load capacitance in pF;
V_{CC} = supply voltage in V;
N = number of inputs switching;
$\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.

11.1 Waveforms and test circuit

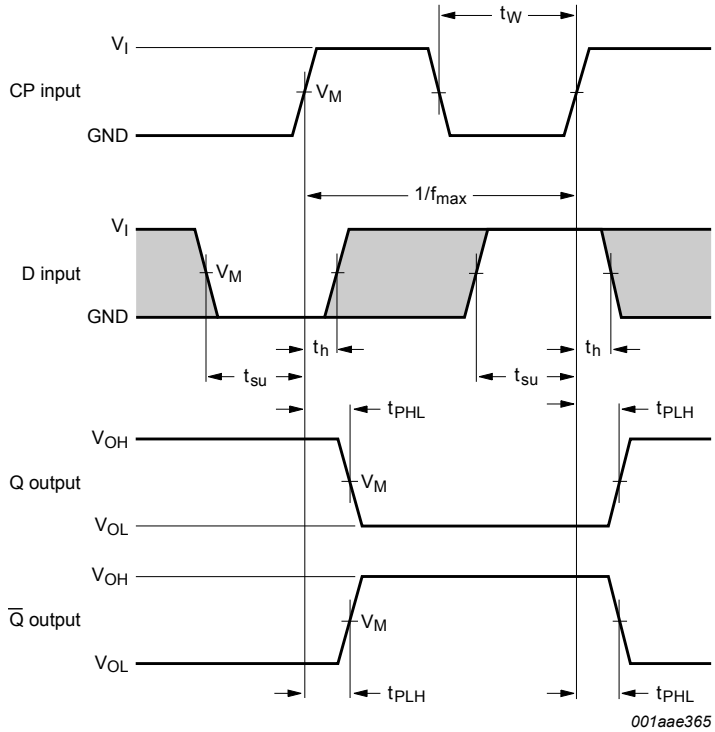

Measurement points are given in Table 10.


The shaded areas indicate when the input is permitted to change for predictable output performance.

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Figure 5. The clock input (CP) to output (Q, $\overline{Q}$) propagation delays, the data input (D) to clock input (CP) set-up and hold times and the clock input (CP) pulse width and maximum frequency

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

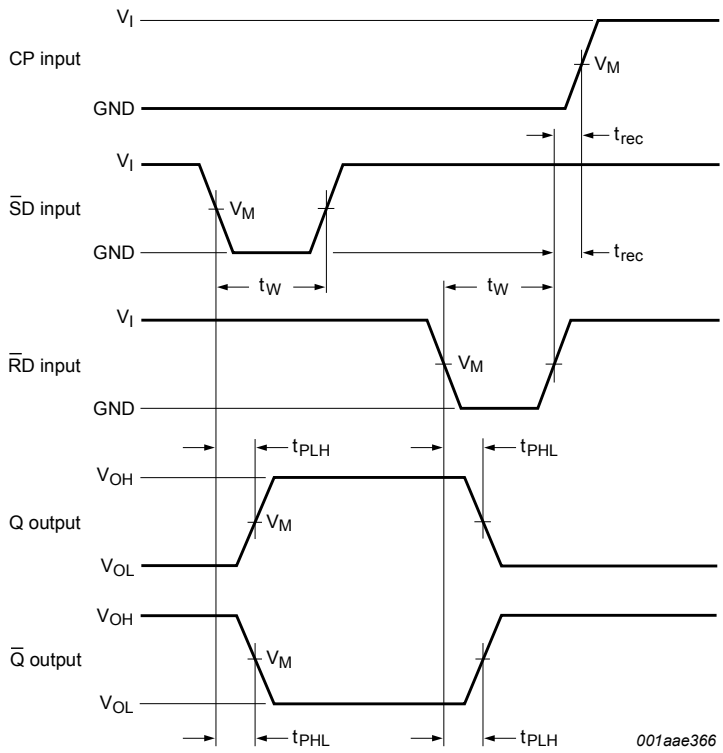

Measurement points are given in Table 10.

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.


Figure 6. The set input ($\overline{SD}$) and reset input ($\overline{RD}$) to output (Q, $\overline{Q}$) propagation delays, the set input ($\overline{SD}$) and reset input ($\overline{RD}$) pulse widths and the reset input ($\overline{RD}$) to clock input (CP) recovery time

Table 10. Measurement points

Supply voltage	Output	Input		
V_{CC}	V_M	V_M	V_I	$t_r = t_f$
0.8 V to 3.6 V	0.5 × V_{CC}	0.5 × V_{CC}	V_{CC}	≤ 3.0 ns

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

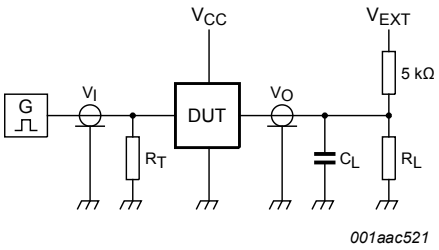

Test data is given in Table 11.

Definitions for test circuit:

R_L = Load resistance.

C_L = Load capacitance including jig and probe capacitance.

R_T = Termination resistance should be equal to the output impedance Zo of the pulse generator.

V_{EXT} = External voltage for measuring switching times.

Figure 7. Test circuit for measuring switching times

Table 11. Test data

Supply voltage	Load		V_{EXT}		
V_{CC}	C_L	R_L[1]	t_{PLH}, t_{PHL}	t_{PZH}, t_{PHZ}	t_{PZL}, t_{PLZ}
0.8 V to 3.6 V	5 pF, 10 pF, 15 pF and 30 pF	5 kΩ or 1 MΩ	open	GND	2 × V_{CC}


[1] For measuring enable and disable times R_L = 5 kΩ.
For measuring propagation delays, setup and hold times and pulse width R_L = 1 MΩ.

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

12 Package outline

VSSOP8: plastic very thin shrink small outline package; 8 leads; body width 2.3 mm **SOT765-1**

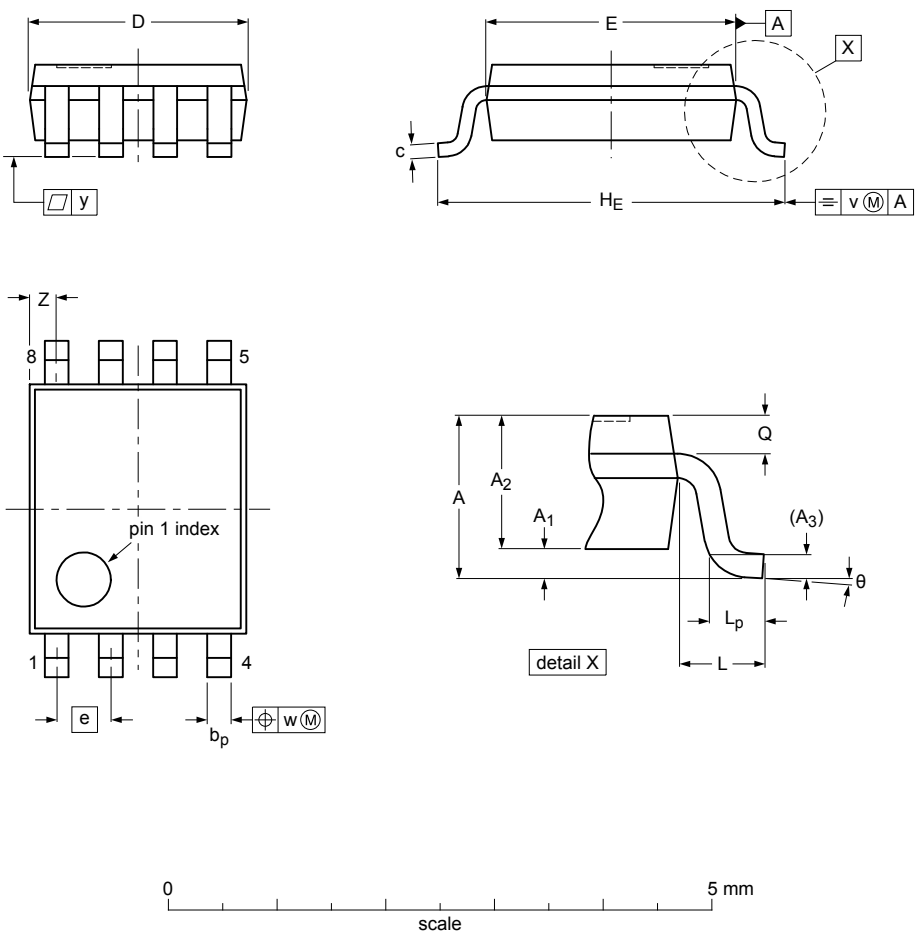

Dimensions (mm are the original dimensions)

Unit	A max.	A_1	A_2	A_3	b_p	c	$D^{(1)}$	$E^{(2)}$	e	H_E	L	L_p	Q	v	w	y	$Z^{(1)}$	θ
max		0.15	0.85		0.27	0.23	2.1	2.4		3.2		0.40	0.21				0.4	8°
mm nom	1			0.12					0.5		0.4			0.2	0.08	0.1		
min		0.00	0.60		0.17	0.08	1.9	2.2		3.0		0.15	0.19				0.1	0°

Note
1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
2. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

sot765-1_po

Outline version	References				European projection	Issue date
	IEC	JEDEC	JEITA			
SOT765-1		MO-187				~~07-06-02~~ 16-05-31

Figure 8. Package outline SOT765-1 (VSSOP8)

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

13 Abbreviations

Table 12. Abbreviations

Acronym	Description
CDM	Charged Device Model
DUT	Device Under Test
ESD	ElectroStatic Discharge
HBM	Human Body Model
MIL	Military
MM	Machine Model

14 Revision history

Table 13. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74AUP1G74_Q100 v.2	20170410	Product data sheet	-	74AUP1G74_Q100 v.1
Modifications:	• The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia. • Legal texts have been adapted to the new company name where appropriate.			
74AUP1G74_Q100 v.1	20150527	Product data sheet	-	-

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

15 Legal information

15.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.
[2] The term 'short data sheet' is explained in section "Definitions".
[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

15.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

15.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Suitability for use in automotive applications — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Contents

1 General description 1
2 Features and benefits 1
3 Ordering information 2
4 Marking 2
5 Functional diagram 2
6 Pinning information 3
6.1 Pinning 3
6.2 Pin description 3
7 Functional description 3
8 Limiting values 4
9 Recommended operating conditions 4
10 Static characteristics 5
11 Dynamic characteristics 8
11.1 Waveforms and test circuit 13
12 Package outline 16
13 Abbreviations 17
14 Revision history 17
15 Legal information 18

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© Nexperia B.V. 2017. **All rights reserved.**

For more information, please visit: http://www.nexperia.com
For sales office addresses, please send an email to: salesaddresses@nexperia.com

Date of release: 10 April 2017
Document identifier: 74AUP1G74_Q100

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nexperia:
74AUP1G74DC-Q100H