

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC	DIST	REVISIONS				
AF	50	P	LTR	DESCRIPTION	DATE	APVD
		P		REVISED PER ECR-13-011489	10DEC2013	KH PD




1 SUFFIX LETTER MUST BE USED ONLY WHEN ORDERING APPLICATOR TOOLING FOR STEPPED UP VERSION.

2 CONTINUOUS STRIP ON REELS.


3 FOREIGN PRODUCTION ONLY.

4 WIRE SIZE IS 0.8–2.0mm², [18–14] AWG.

5 INSULATION RANGE IS 3.05–4.32 [.120–.170] DIA.

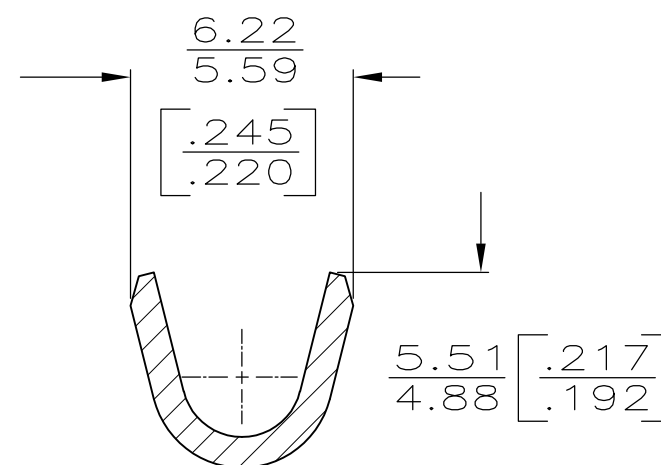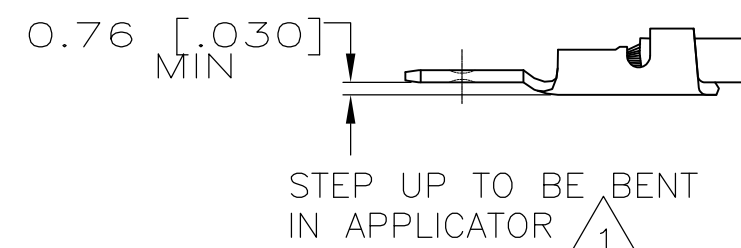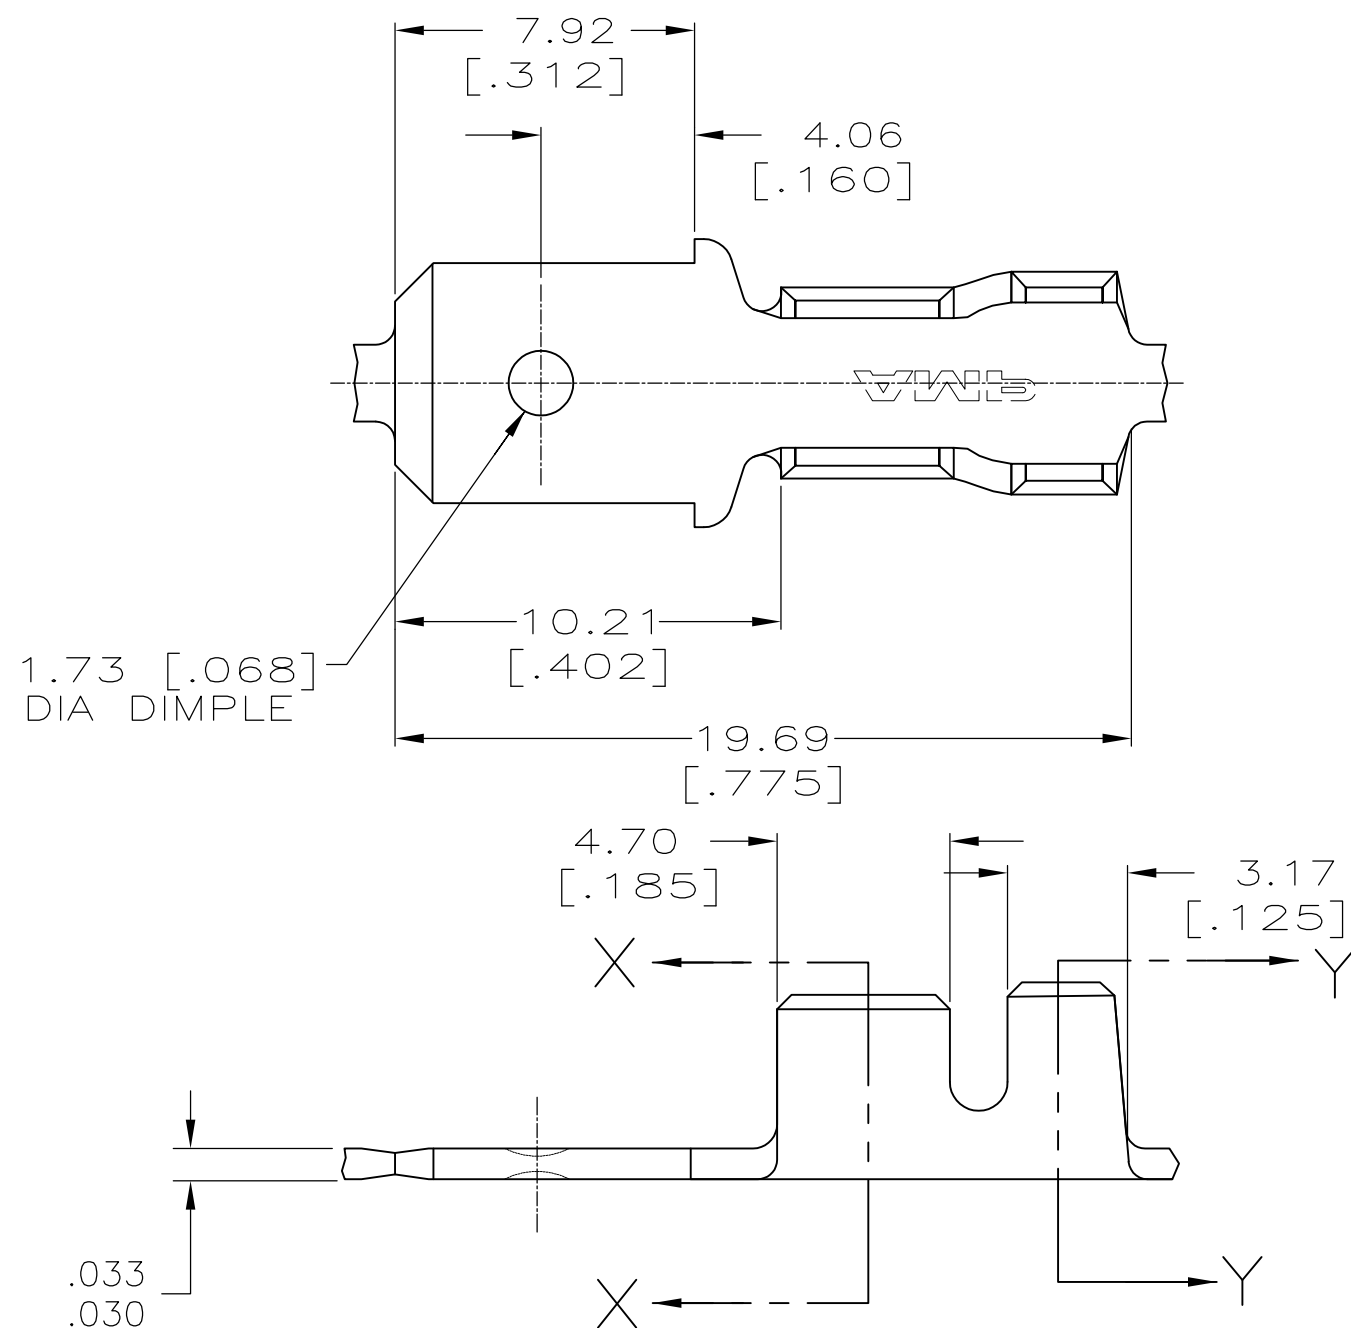

SECTION Y-Y

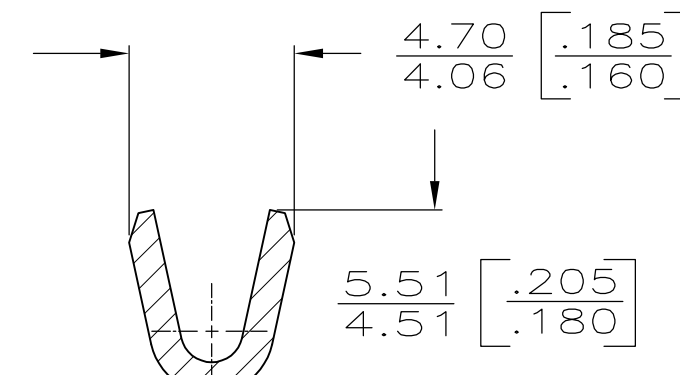

SECTION X-X

OBSOLETE		SILVER	41411-1	3
	41411 B	-	41411	
	TERMINAL NUMBER STEPPED UP	FINISH	PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.38 [.015] 4 PLC ± - ANGLES ± -
MATERIAL BRASS	FINISH SEE TABLE

DWN JR RUTH 2/5/92	CHK MS FEHER 2/5/92	APVD D REINER 1/5/92
PRODUCT SPEC	APPLICATION SPEC	WEIGHT -

STE

TE Connectivity

NAME TAB, FASTON, 6.35 [.250] SERIES			
SIZE A3	CAGE CODE 00779	DRAWING NO C-41411	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1
		REV P	