


D

(SCALE 1:1)

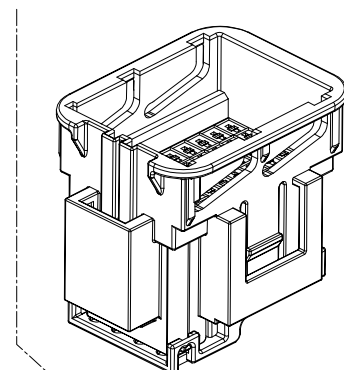

PE

POSITION OF MOUNTING POCKET (CONVERSION PART TYPE)

©

NOTES:

1. GENERAL TOLERANCE IS ± 0.3
2.  CONDITION OF DELIVERY :
DBL IN 1ST LOCKING POSITION
3. APPLIED PLUG ASS'Y P/N: X-936421-X
APPLIED INNER SEAL P/N: 0-936863-1
APPLIED WIRE COVER P/N: 0-936614-2
4. APPLIED TAB CONTACT P/N : TABLE 1

BA<TABLE 1>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[936429-2](#)