


Art.-Number: 701132

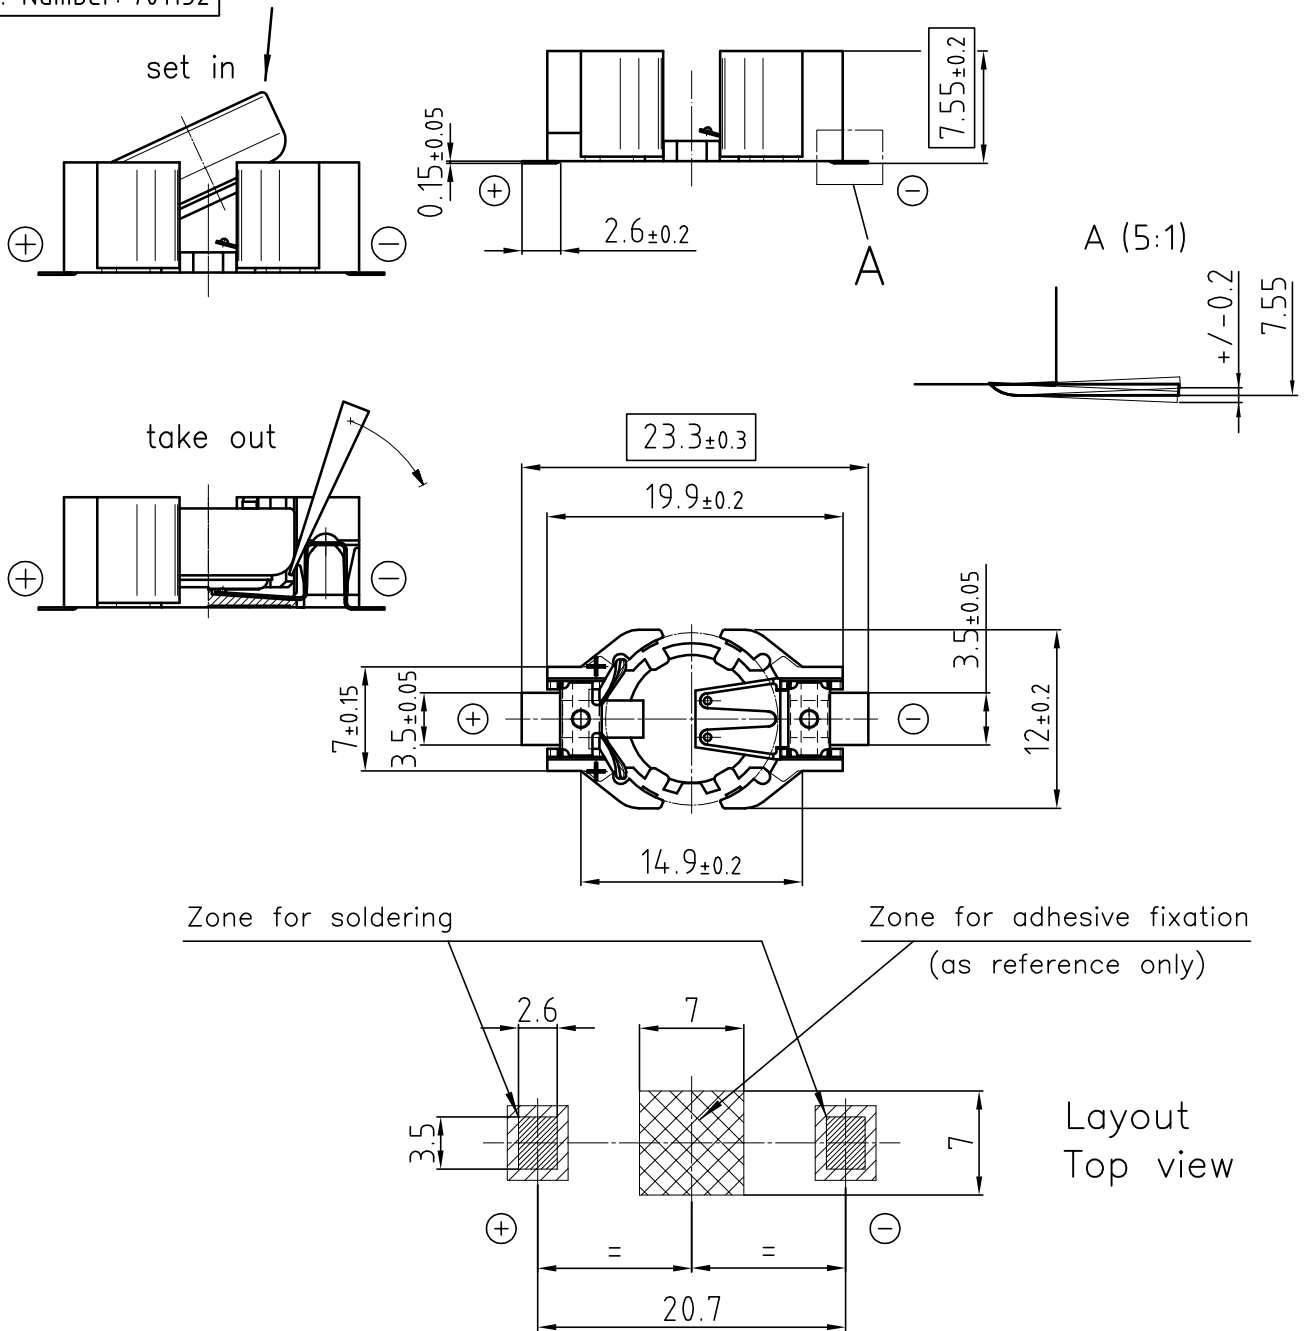

- Samples can deviate in the execution from the serie.

- Dimensions and tolerances can be specified only after the testing of the devices for the mass production definitely

Holder material : heat resistant, glass-fiber reinforced LCP

Battery contacts : spring stainless steel 301 nickel plated throughout

Solder contacts : spring stainless steel 301 solder area tin-plated throughout, min. thickness 5µm

All framed values will be used for dimension checking !

Rev.	①	07.09.07	MCi	Rev.	○				Customer's Approval		
Rev.	②	25.10.07	SRi	Rev.	○				Date		
Rev.	③	15.09.10	Wu Ping	Rev.	○				Signature		
Titel: SMTU357-LF								Scale	Drawn	01.12.05	SRi
									Checked	16.09.10	SRi
									Approved		
renata batteries CH-4452 Itingen Switzerland								3.8922.4-3			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Renata:

SMTU357-LF