

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

,19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD


G

REV / 0L20-0014-96

28OCT96

ME

TM

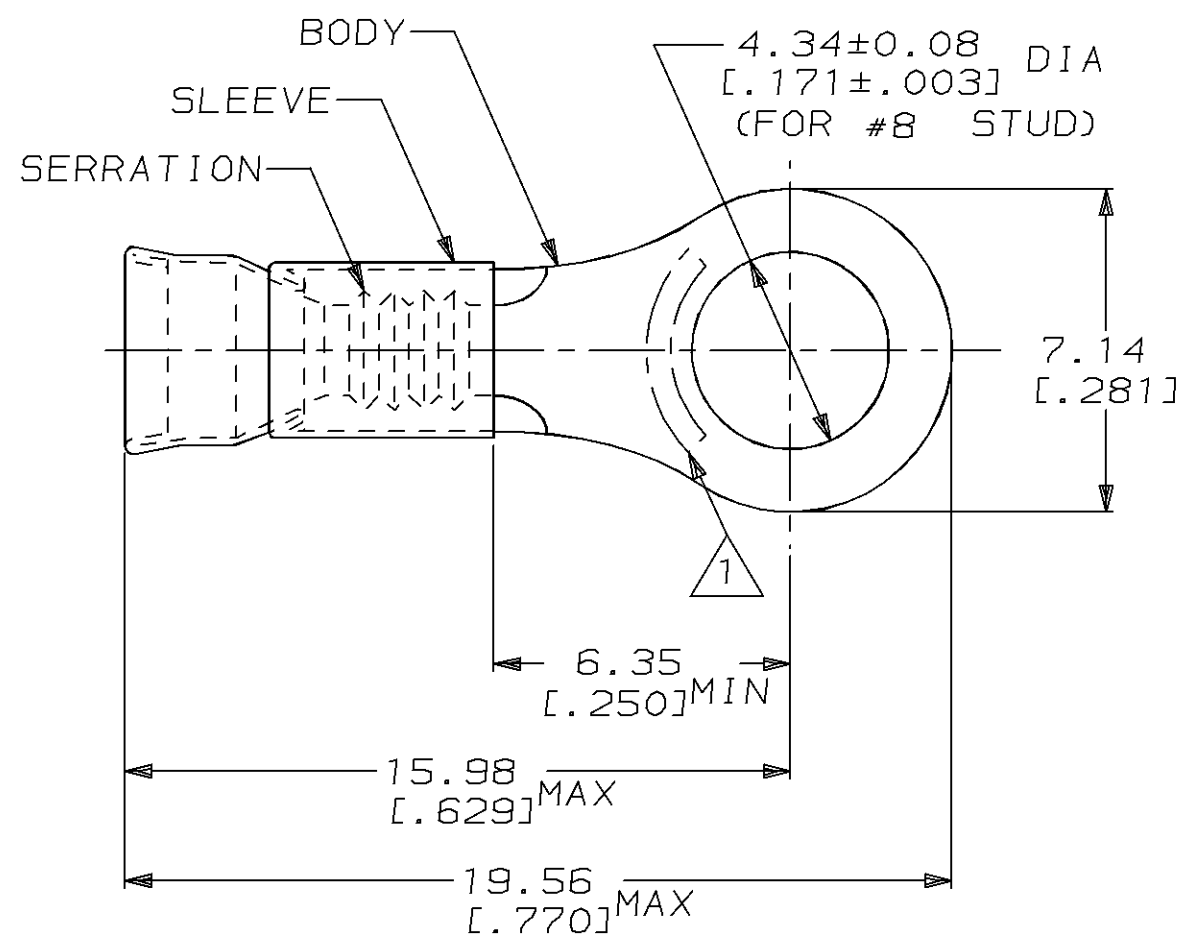


1000	LOOSE PIECE	△ 323152-2
5000	ON TAPE, REEL	△ 323152-1
1000	LOOSE PIECE	△ 323152
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMMAX RECOMMENDED OPERATING
TEMPERATURE:
343°C [650°F]THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:

mm [in]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±-
2 PLC	±0.20 [0.008]
3 PLC	±-
4 PLC	±-
ANGLES	±-

MATERIAL
BODY, CU PER ASTM B152
SLEEVE, NI SIL PER
ASTM B122FINISH
SEE TABLE

DWN 100CT94

CHK L OLMEDA

100CT94

APVD M ELLIS

100CT94

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

AMPAMP Incorporated
Harrisburg, PA 17105-3608NAME
TERMINAL, RING TONGUE,
STRATOTHERM, DIAMOND GRIP,
WIRE SIZE, 22-16 AWGSIZE
A3
CAGE CODE
00779
DRAWING NO
C-323152SCALE
6:1
SHEET
1 OF 1
REV
G