


# STEEL CABLE CLAMPS

Ideal for securing, grounding and routing cable, wiring, piping, tubing, components and fibre optics.

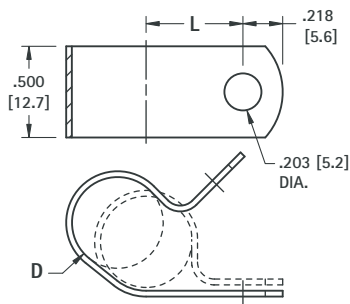


**MATERIAL:** .032 (.81) Steel, Zinc Plate

| CAT. NO. | D FOR DIA.  | L CTR TO CTR |
|----------|-------------|--------------|
| 8100     | .187 (4.7)  | .375 (9.5)   |
| 8101     | .250 (6.4)  | .406 (10.3)  |
| 8102     | .312 (7.9)  | .437 (11.1)  |
| 8103     | .375 (9.5)  | .468 (11.9)  |
| 8104     | .437 (11.1) | .500 (12.7)  |
| 8105     | .500 (12.7) | .531 (13.5)  |
| 8106     | .562 (14.4) | .562 (14.3)  |
| 8107     | .625 (15.9) | .594 (15.1)  |
| 8108     | .687 (17.4) | .625 (15.9)  |
| 8109     | .750 (19.0) | .656 (16.7)  |
| 8110     | .812 (20.6) | .687 (17.4)  |
| 8111     | .875 (22.2) | .718 (18.2)  |
| 8112     | .937 (23.8) | .750 (19.1)  |
| 8113     | 1.00 (25.4) | .781 (19.8)  |

# INSULATED STEEL CABLE CLAMPS

Ideal for securing, insulating and routing cable, wiring, piping, tubing, components and fibre optics.





**MATERIAL:** .032 (.81) Steel, Zinc Plate  
**Cushion:** Black Vinyl

| CAT. NO. | D FOR DIA.   | L CTR TO CTR |
|----------|--------------|--------------|
| 8121     | .187 (4.7)   | .406 (10.3)  |
| 8122     | .250 (6.4)   | .437 (11.1)  |
| 8123     | .312 (7.9)   | .468 (11.9)  |
| 8124     | .375 (9.5)   | .500 (12.7)  |
| 8125     | .437 (11.1)  | .531 (13.5)  |
| 8126     | .500 (12.7)  | .562 (14.3)  |
| 8127     | .562 (14.3)  | .594 (15.1)  |
| 8128     | .625 (15.9)  | .625 (15.9)  |
| 8129     | .687 (17.4)  | .656 (16.7)  |
| 8130     | .750 (19.1)  | .687 (17.4)  |
| 8131     | .812 (20.6)  | .718 (18.2)  |
| 8132     | .875 (22.2)  | .750 (19.1)  |
| 8133     | .937 (23.8)  | .781 (19.8)  |
| 8134     | 1.000 (25.4) | .812 (20.6)  |

# STEEL HALF CLAMPS

Ideal for securing, grounding and routing cable, wiring, piping, tubing, components and fibre optics.




**MATERIAL:** Steel, Zinc Plate

| CAT. NO. | D FOR DIA.   | H HOLE DIA. | L CTR TO CTR | B           | G THICK     | W WIDTH     |
|----------|--------------|-------------|--------------|-------------|-------------|-------------|
| 8140     | .125 (3.2)   | .218 (5.5)  | .437 (11.1)  | .125 (3.2)  |             |             |
| 8141     | .187 (4.7)   | .218 (5.5)  | .437 (11.1)  | .156 (4.0)  | .032 (.81)  | .500 (12.7) |
| 8142     | .250 (6.4)   | .218 (5.5)  | .437 (11.1)  | .187 (4.7)  |             |             |
| 8143     | .312 (7.9)   | .218 (5.5)  | .500 (12.7)  | .250 (6.4)  | .048 (1.22) | .500 (12.7) |
| 8144     | .375 (9.5)   | .218 (5.5)  | .531 (13.5)  | .312 (7.9)  | .048 (1.22) | .625 (15.9) |
| 8145     | .437 (11.1)  | .218 (5.5)  | .562 (14.3)  | .375 (9.5)  |             |             |
| 8146     | .500 (12.7)  | .218 (5.5)  | .625 (15.9)  | .437 (11.1) |             |             |
| 8147     | .562 (14.3)  | .218 (5.5)  | .687 (17.4)  | .500 (12.7) | .060 (1.52) | .625 (15.9) |
| 8148     | .625 (15.9)  | .218 (5.5)  | .750 (19.1)  | .562 (14.3) |             |             |
| 8149     | .687 (17.4)  | .218 (5.5)  | .812 (20.6)  | .625 (15.9) |             |             |
| 8150     | .750 (19.1)  | .218 (5.5)  | .812 (20.6)  | .687 (17.4) | .060 (1.52) | .625 (15.9) |
| 8151     | .812 (20.6)  | .218 (5.5)  | .875 (22.2)  | .750 (19.1) |             |             |
| 8152     | .875 (22.2)  | .281 (7.1)  | .937 (23.8)  | .812 (20.6) |             |             |
| 8153     | .937 (23.8)  | .281 (7.1)  | .968 (24.6)  | .812 (20.6) | .060 (1.52) | .750 (19.1) |
| 8154     | 1.000 (25.4) | .281 (7.1)  | 1.000 (25.4) | .937 (23.8) |             |             |

# INSULATED STEEL HALF CLAMPS

Ideal for securing, insulating and routing cable, wiring, piping, tubing, components and fibre optics.




**MATERIAL:** Steel, Zinc Plate  
**Cushion:** Black Vinyl

| CAT. NO. | D FOR DIA.   | H HOLE DIA. | L CTR TO CTR | B            | G THICK     | W WIDTH     |
|----------|--------------|-------------|--------------|--------------|-------------|-------------|
| 8160     | .187 (4.7)   | .218 (5.5)  | .437 (11.1)  | .187 (4.7)   | .032 (.81)  | .500 (12.7) |
| 8161     | .250 (6.4)   | .218 (5.5)  | .500 (12.7)  | .250 (6.4)   | .048 (1.22) | .500 (12.7) |
| 8162     | .312 (7.9)   | .218 (5.5)  | .531 (13.5)  | .312 (7.9)   | .048 (1.22) | .625 (15.9) |
| 8163     | .375 (9.5)   | .218 (5.5)  | .562 (14.3)  | .375 (9.5)   |             |             |
| 8164     | .437 (11.1)  | .218 (5.5)  | .625 (15.9)  | .437 (11.1)  |             |             |
| 8165     | .500 (12.7)  | .218 (5.5)  | .687 (17.4)  | .500 (12.7)  |             |             |
| 8166     | .562 (14.3)  | .218 (5.5)  | .750 (19.1)  | .562 (14.3)  | .060 (1.52) | .625 (15.9) |
| 8167     | .625 (15.9)  | .218 (5.5)  | .812 (20.6)  | .625 (15.9)  |             |             |
| 8168     | .687 (17.4)  | .218 (5.5)  | .812 (20.6)  | .687 (17.4)  |             |             |
| 8169     | .750 (19.1)  | .218 (5.5)  | .875 (22.2)  | .750 (19.1)  |             |             |
| 8170     | .812 (20.6)  | .281 (7.1)  | .937 (23.8)  | .812 (20.6)  |             |             |
| 8171     | .875 (22.2)  | .281 (7.1)  | .968 (24.6)  | .812 (20.6)  |             |             |
| 8172     | .937 (23.8)  | .281 (7.1)  | 1.000 (25.4) | .937 (23.8)  | .060 (1.52) | .750 (19.1) |
| 8173     | 1.000 (25.4) | .281 (7.1)  | 1.062 (27.0) | 1.000 (25.4) |             |             |

## CUSHIONED CABLE CLAMPS



Ideal for securing in rugged applications. These cushioned cable clamps secure tightly and protect against shock and vibration.

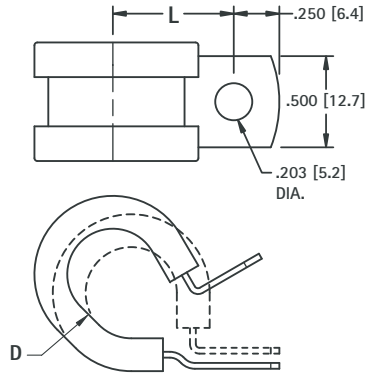


**MATERIAL:** .032 (0.81) Stainless Steel  
**Cushion:** EPDM Rubber

| CAT. NO. | D FOR DIA.   | L CTR TO CTR |
|----------|--------------|--------------|
| 8090     | .250 (6.4)   | .711 (18.1)  |
| 8091     | .375 (9.5)   | .500 (12.7)  |
| 8092     | .500 (12.7)  | .562 (14.3)  |
| 8093     | .625 (15.9)  | .718 (18.2)  |
| 8094     | .750 (19.1)  | .781 (19.8)  |
| 8095     | .875 (22.2)  | .843 (21.4)  |
| 8096     | 1.000 (25.4) | .906 (23.0)  |

## NYLON CABLE CLAMPS

Ideal for securing, insulating and routing cable wiring, piping, tubing, components and fibre optics.



**MATERIAL:** .050 (1.27) Nylon 6/6, White



| CAT. NO. | D FOR DIA.   | L CTR TO CTR | W WIDTH     | H HOLE     |
|----------|--------------|--------------|-------------|------------|
| 7620     | .125 (3.2)   | .325 (8.3)   | .375 (9.5)  | .140 (3.6) |
| 7621     | .125 (3.2)   | .325 (8.3)   | .375 (9.5)  | .203 (5.2) |
| 7622     | .187 (4.7)   | .380 (9.7)   | .375 (9.5)  | .140 (3.6) |
| 7623     | .187 (4.7)   | .380 (9.7)   | .375 (9.5)  | .203 (5.2) |
| 7624     | .250 (6.4)   | .410 (10.4)  | .375 (9.5)  | .140 (3.6) |
| 7625     | .250 (6.4)   | .410 (10.4)  | .375 (9.5)  | .203 (5.2) |
| 7626     | .312 (7.9)   | .445 (11.3)  | .375 (9.5)  | .140 (3.6) |
| 7627     | .312 (7.9)   | .445 (11.3)  | .375 (9.5)  | .203 (5.2) |
| 7628     | .375 (9.5)   | .475 (12.1)  | .375 (9.5)  | .140 (3.6) |
| 7629     | .375 (9.5)   | .475 (12.1)  | .375 (9.5)  | .203 (5.2) |
| 7630     | .437 (11.1)  | .525 (13.3)  | .375 (9.5)  | .140 (3.6) |
| 7631     | .437 (11.1)  | .525 (13.3)  | .375 (9.5)  | .203 (5.2) |
| 7632     | .500 (12.7)  | .550 (14.0)  | .375 (9.5)  | .140 (3.6) |
| 7633     | .500 (12.7)  | .550 (14.0)  | .375 (9.5)  | .203 (5.2) |
| 7634     | .562 (14.3)  | .625 (15.9)  | .500 (12.7) | .203 (5.2) |
| 7635     | .625 (15.9)  | .660 (16.8)  | .500 (12.7) | .203 (5.2) |
| 7636     | .750 (19.1)  | .785 (19.9)  | .500 (12.7) | .203 (5.2) |
| 7637     | .875 (22.2)  | .845 (21.5)  | .500 (12.7) | .203 (5.2) |
| 7638     | 1.000 (25.4) | .910 (23.1)  | .500 (12.7) | .203 (5.2) |
| 7639     | 1.125 (28.6) | .970 (24.6)  | .500 (12.7) | .203 (5.2) |
| 7640     | 1.250 (31.8) | 1.060 (26.9) | .500 (12.7) | .203 (5.2) |

## CABLE TIE ROUTING CLIP

These clips snap into PC Boards or Panel chassis and are ideal for securing cable wiring, piping, tubing, components and fibre optics when used with cable ties.

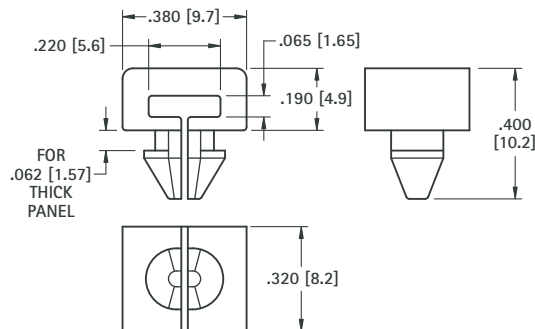


Recommended Mtg. Hole .187 (4.8) diameter.

**MATERIAL:** Nylon 6/6, UL Rated 94V-2

**CAT. NO. 8860**

## NYLON CABLE TIES

Popular sizes and strengths to meet common cable tie requirements. Injection molded with one piece construction for strength and reliability. Easily installed by hand. Optional installation tool available, tightens and flush cuts cable tie.

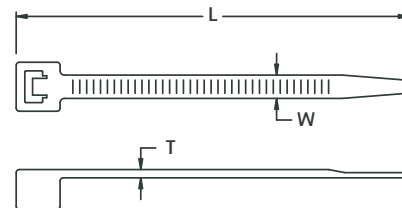

**MATERIAL:** Natural Nylon 6/6, UL Rated 94V-2

| CAT. NO. | TENSILE STRENGTH (Min. Bundle)                                  | FOR BUNDLE DIA. (Max.) | L LENGTH (Approx.) | W WIDTH (Approx.) | T THICKNESS (Approx.) |
|----------|-----------------------------------------------------------------|------------------------|--------------------|-------------------|-----------------------|
| 8865     | 18 lbs                                                          | 1.000 (25.4)           | 4.250 (108.0)      | .100 (2.54)       | .045 (1.14)           |
| 8866     | 18 lbs                                                          | 2.000 (50.8)           | 8.000 (203.2)      | .100 (2.54)       | .045 (1.14)           |
| 8867     | 40 lbs                                                          | 1.250 (31.8)           | 6.000 (152.4)      | .140 (3.56)       | .050 (1.27)           |
| 8868     | 50 lbs                                                          | 1.750 (44.5)           | 7.500 (190.5)      | .190 (4.83)       | .055 (1.40)           |
| 8869     | 120 lbs                                                         | 4.000 (101.6)          | 14.500 (368.3)     | .190 (4.83)       | .055 (1.40)           |
| 8870     | Hand Operated Cable Tie Installation Tool for 18lb to 50lb Ties |                        |                    |                   |                       |