

Standard



Image for illustrative purpose only

## Summary

[Request a quote](#)

BKT series

Number of contacts Low Voltage	26
Gender	Standard
Socket / Receptacle	Socket / Receptacle - Fixed Panel Rear Mounted
Locking system	Push-pull
Panel Drill Hole	M20
Jacket cable outside diameter [mm]	1.00 - 18.60 mm
Size	2K
Suggested matching part	<a href="#">FGG.2K.326.CLAC80</a>
Series	K - Outdoor keyed

[https://www.lemo.com/int\\_en/solutions/originals/k-outdoor-keyed/eeg-2k-326-cll.html](https://www.lemo.com/int_en/solutions/originals/k-outdoor-keyed/eeg-2k-326-cll.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# Technical details

## Electrical Configuration

Number of contacts Low Voltage	26
Contact Termination Low voltage	Solder
Insert configuration value	2K.326 - 26 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/1.5)
Rated current	1.5 A
Vtest (contact-contact)	1 kV (DC)
Vtest (contact-shell)	1.9 kV (DC)
Max. Solid Conductor	0.09 mm <sup>2</sup> (AWG 28)
Max. Stranded Conductor	0.09 mm <sup>2</sup> (AWG 28)
Bucket Dia.	0.45 mm (0.018in)
Contact Dia.	0.5 mm (0.0197in)
Gender	Standard

## Form & Material

Shell style / Model id	EE - Fixed receptacle, nut fixing (back panel mounting)
Socket / Receptacle	Fixed Panel Rear Mounted
Housing material	Brass (chrome plated [SAE AMS 2460]) shell, collet nut and latch sleeve, nickel plated [SAE AMS QQ N 290] brass mid pieces
Locking system	Push-pull
Keying	G: 1 key (alpha=0, plug: male contacts, receptacle: female contacts)
Colour	Grey
Weight	34.54 g
Panel Drill Hole	M20



[https://www.lemo.com/int\\_en/solutions/originals/k-outdoor-keyed/eeg-2k-326-cll.html](https://www.lemo.com/int_en/solutions/originals/k-outdoor-keyed/eeg-2k-326-cll.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Environment

Technical domain	Audio Video, Energy and Industrial, Medical, Test and Measurement
Environmental sealing (IP rating)	IP68
Endurance	5000 mating cycles
Temperature range	-55°C / +200°C (max. temperature valid for short periods of use.)
Climatic Category	50/175/21
Humidity (max)	<=95% [at 60 deg C /140 F]
Shielding (min)	95 dB (10 MHz)
Shielding (min)	80 dB (1 GHz)
Shock Resistance	100 g [ 6 ms]
Vibration	15 g [10 Hz - 2000 Hz]
Salt Spray Corrosion	>1000 hr
<b>Cable fixation</b>	
Jacket cable outside diameter [mm]	1.00 - 18.60 mm

## Drawings

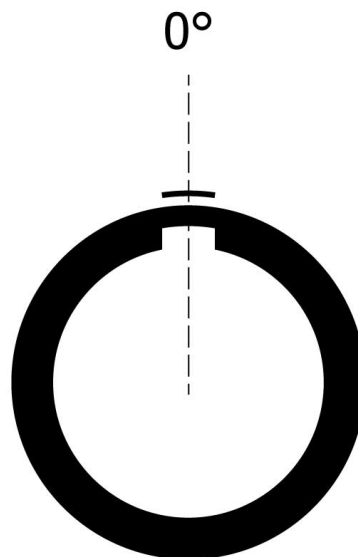

[https://www.lemo.com/int\\_en/solutions/originals/k-outdoor-keyed/eeg-2k-326-cll.html](https://www.lemo.com/int_en/solutions/originals/k-outdoor-keyed/eeg-2k-326-cll.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Dimensions

	<b>B</b>	<b>e</b>	<b>E</b>	<b>L</b>	<b>M</b>	<b>N</b>	<b>P</b>	<b>A</b>	<b>S1</b>
mm.	25	M20x1.0	5	30.7	3.5	28.6	10	25	18.5
in.	0.98		0.2	1.21	0.14	1.13	0.39	0.98	0.73

## Recommended By Lemo

### Caps

Compatible cap [BRE.2K.200.NAS](#)

Cap 2 [BRE.2K.200.CAS](#)

### Tools

Spanner 2 [DCM.65.225.AZ6](#)

Spanner wrench [Socket for torque wrench DCM.2E.M20.6](#)

[https://www.lemo.com/int\\_en/solutions/originals/k-outdoor-keyed/eeg-2k-326-cll.html](https://www.lemo.com/int_en/solutions/originals/k-outdoor-keyed/eeg-2k-326-cll.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.