

USB Connectors

XM7

Small Interface Connectors That Conform to USB Standards


mini-USB Connectors

- Insertion life of 5,000 insertions.
- Right-angle DIP terminals or right-angle SMT terminals.

USB Connectors

- USB A-type sockets for mounting on personal computers and USB hubs. USB B-type sockets for mounting on printers, scanner, mouses, and other peripheral devices for computers.

RoHS Compliant

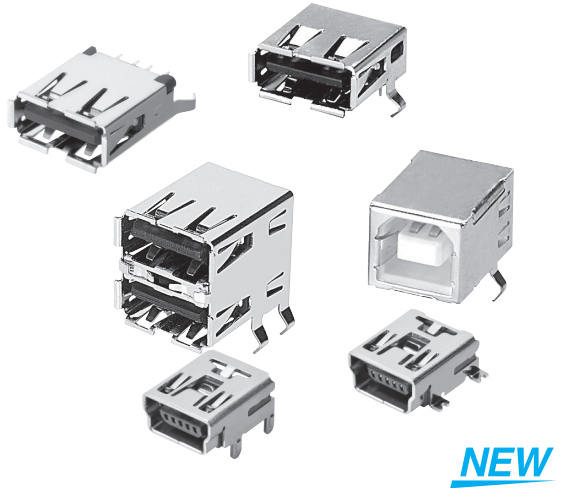

XM7D mini-USB Connectors

Model Number Legend

XM7D-05 1 □
 1 2 3 4

1 Type

D: mini-B-type socket

2 No. of Contacts

05: 5 contacts

3 Plating Specification



1: Gold plated

4 Terminal Shape

- 2: Right-angle DIP terminals
 4: Right-angle SMT terminals

Ordering Information

●Sockets

	Right-angle DIP terminals	Right-angle SMT terminals
Appearance	 NEW	 NEW
Model	XM7D-0512	XM7D-0514
Minimum ordering quantity (pieces)	100	50

XM7

Ratings and Characteristics

Rated current	1 A
Rated voltage	30 V
Insulation resistance	100 MΩ min.
Contact resistance	50 mΩ max.
Dielectric strength	100 VAC for 1 min (leakage current: 0.5 mA max.)
Total insertion force	35 N max.
Total removal force	7 N min.
Insertion durability	5,000 insertions
Ambient operating temperature	0 to 50°C (with no icing)

Materials

Housing	LCP resin
Contacts	Copper alloy
Shell	Copper alloy



Dimensions

(Unit: mm)

XM7D-0512





NEW

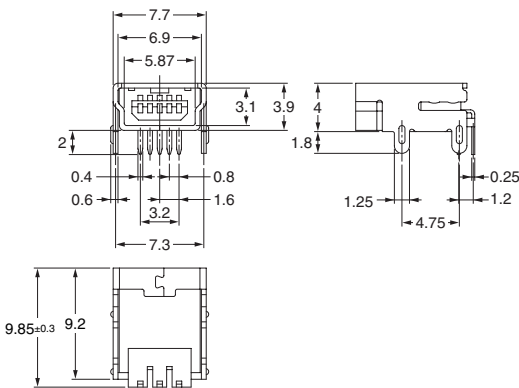

XM7D-0514



NEW

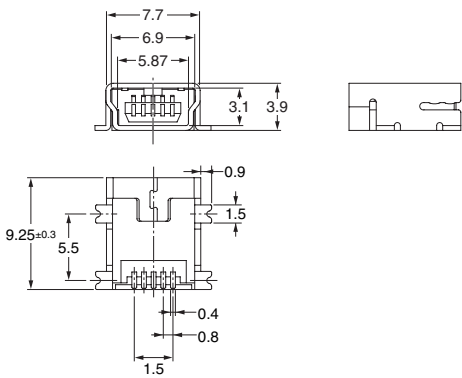

XM7A/B USB Connectors

Model Number Legend

XM7□-04 4 □-□
 1 2 3 4 5

1 Type

A: A-type socket
 B: B-type socket

2 No. of Contacts

04: 4 contacts

3 Plating Specification

4: Gold plated

4 Terminal Shape





1: Straight (A-type sockets only)
 2: Right angle

5 Special Code

A-type sockets	Blank: 1 socket (black housing) A: 2 stacked sockets (black housing)
B-type sockets	Blank: White housing

Ordering Information

●Sockets

Item	Type	One A-type Socket	One A-type Socket	Two Stacked A-type Sockets	One B-type Socket
Appearance		With straight DIP kinked terminals 	With right-angle DIP kinked terminals 	With right-angle DIP kinked terminals 	With right-angle DIP kinked terminals 
Model		XM7A-0441	XM7A-0442	XM7A-0442-A	XM7B-0442
Minimum ordering quantity (pieces)		120	150	120	150

Ratings and Characteristics

Rated current	1 A
Rated voltage	30 VAC
Contact resistance	30 mΩ max. (at 20 mV, 100 mA max. (excluding cable conductor resistance))
Insulation resistance	1,000 MΩ min. (at 500 VDC)
Dielectric strength	750 VAC for 1 min (leakage current: 0.5 mA max.)
Total insertion force	35.3 N max.
Total removal force	10 N min.
Insertion durability	1,500 insertions
Ambient operating temperature	-40 to 60°C (with no icing)

Materials and Finish



Item	Classification Type	Sockets	
		A-type Sockets	B-type Sockets
Housing		Fiber-glass reinforced PBT resin (UL94V-0)/black	Fiber-glass reinforced PBT resin (UL94V-0)/white
Contacts	Mating end	Phosphor bronze/nickel base, gold plating	
	Terminals	Phosphor bronze/nickel base, tin alloy plated	
Shell		Copper alloy/tin plated	

XM7



■Dimensions

(Unit: mm)



XM7A-0441 One A-type Socket

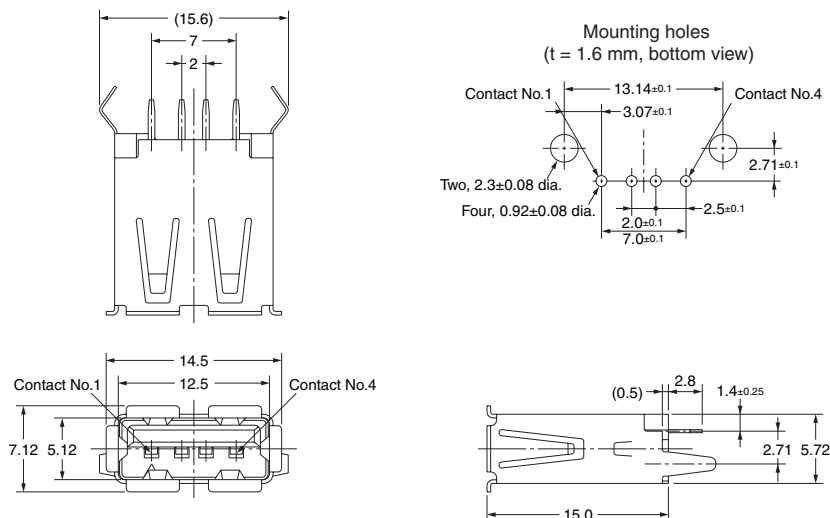


XM7A-0442 One A-type Socket

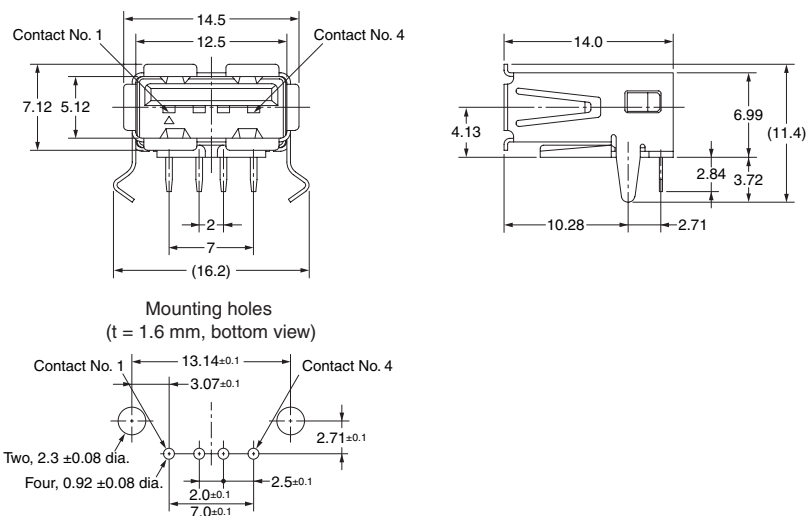

XM7A-0442-A Two Stacked A-type Sockets

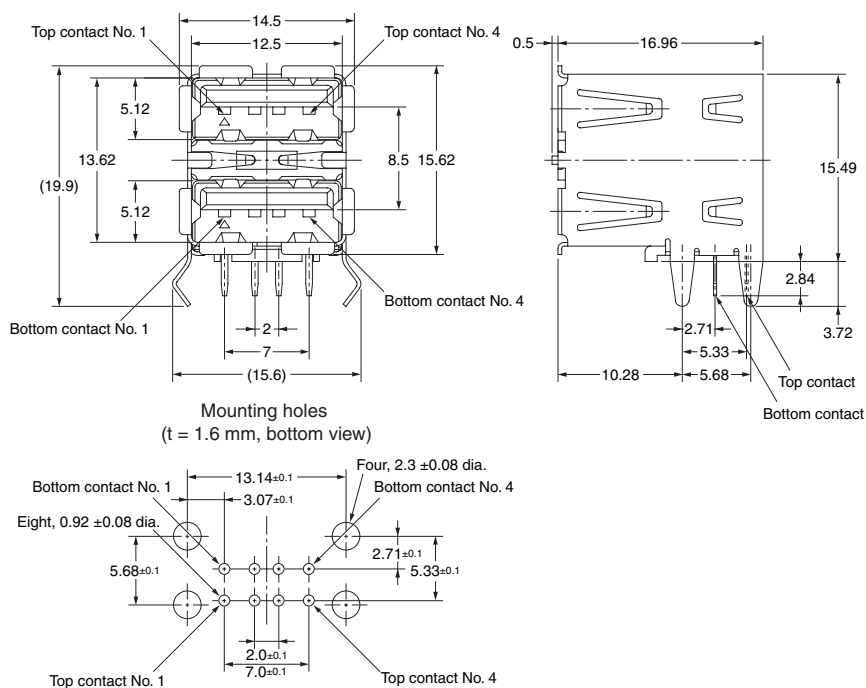


XM7B-0442
One B-type Socket

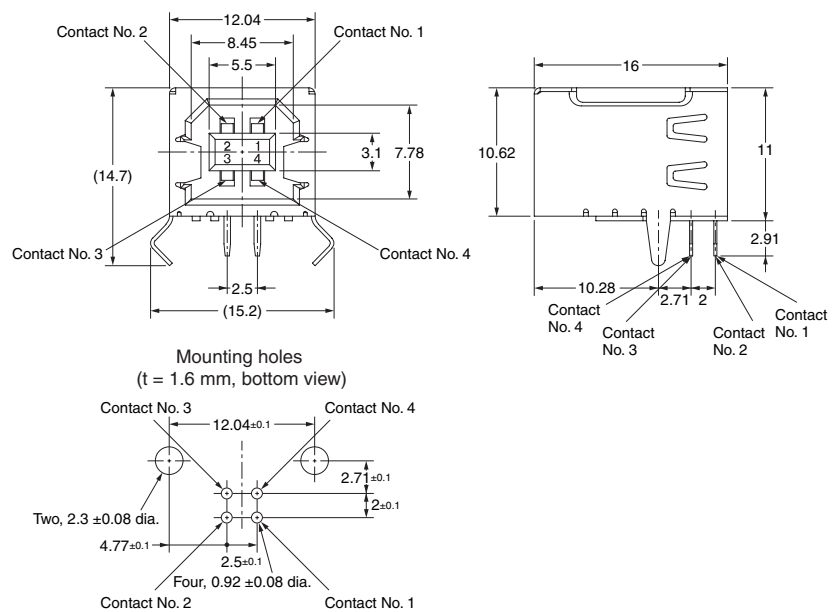


■Accessories (sold separately)

(Unit: mm)

●Dust cover (For XM7A One A-type socket)
XM7Z-0001 (A type)

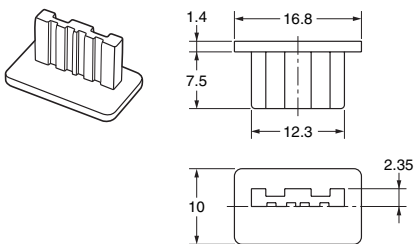

●Dust cover (For XM7B sockets)
XM7Z-0002 (B type)

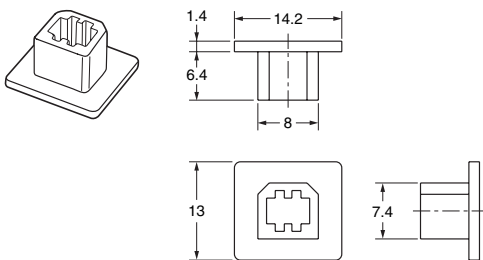

Characteristics/Material

Ambient operating temperature	-40 to 60°C
Material	Polyethylene resin

Model	Applicable	Minimum ordering quantity (pieces)
XM7Z-0001	XM7A (One A-type Socket)	50
XM7Z-0002	XM7B	

Note: Dust covers cannot be used for Two Stacked A-type sockets.

Precautions for Correct Use


●Automatic Soldering

Reference Information: Automated Soldering Conditions (Jet Flow)

- (1) Soldering temperature: $250 \pm 5^{\circ}\text{C}$
- (2) Continuous soldering time: 5 ± 1 s max.

●Soldering Conditions

- Reference Information: Reflow Conditions
- Maximum temperature: 260°C
- Time: 5 to 15 s max.

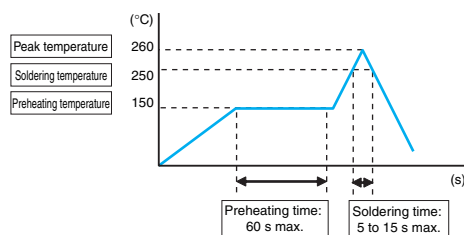

These conditions, however, depend on the type of solder, the manufacturer, the amount of solder, the size of the board, and the other mounting materials.

●Screen Thickness for Printing Cream Solder

We recommend a metal mask thickness of 0.15 mm when printing cream solder.

The appropriate conditions, however, depend on the type of solder, the manufacturer, the amount of solder, the size of the circuit board, other mounting materials, and other conditions.

●Terminal Shapes

The terminals will deform if they are subjected to an excessive load, which will in turn reduce solderability when mounting. Do not drop the Connectors or handle them carelessly. Do not connect anything when the Connectors are not mounted to a board. Doing so may deform the terminals.

●Using an Automatic Solder Bath after Reflow

Mask the mating portion with tape before you perform automatic soldering to prevent flux or solder from entering the mating portion of the Connector. Select and use a suitable masking tape.

●Application Precautions

- Confirm that there is no excessive misalignment or inclination in the mating contact portion between the plug and socket before mating the Connector. Make sure that the Connector is mated all the way to the back. If the Connector is not mated all the way to the back, contact reliability may be lost.
- Do not apply an extreme load during Connector insertion or removal. The Connector may be damaged, and contact failure may result. Twist the plug and socket as little as possible when mating the Connector. Not doing so may deform the terminals or housing or crack the housing.
- Do not insert a foreign object, such as tweezers, into the Connector mating contact portion. Doing so may cause the plating to peel off or deform the terminals.

●Precautions for Board Mounting

Be careful of the amount of board warping. If the board is excessively warped, soldering faults may occur.

●Storage

Do not store the Connectors in locations subject to dust or high humidity. Do not store the Connectors in locations close to sources of gasses such ammonia gas or sulfide gas.

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

OMRON Corporation Electronic and Mechanical Components Company
Contact: www.omron.com/ecb

OMRON ELECTRONIC COMPONENTS EUROPE B.V.
Wegalaan 57, 2132 JD Hoofddorp, THE NETHER LANDS
Tel: (31)23-568-1200/Fax: 31-23-568-1212

OMRON ELECTRONIC COMPONENTS LLC
55 East Commerce Drive, Suite B, IL 60173 U.S.A.
Tel: (1)847-882-2288/Fax: 1-847-882-2192

OMRON ELECTRONIC COMPONENTS PTE LTD.
438A Alexandra Road #05-05/08 Alexandra
Technopark Singapore 119967
TEL:(65)6376-3200/FAX:(65)6376-3211

**OMRON ELECTRONIC COMPONENTS TRADING
(SHANGHAI) LTD. SHANGHAI OFFICE**
27F Xin Mei Union Square, 999 Pudong South Road,
Pudong New Area, Shanghai, CHINA 200120
Tel: (86)21-6859-5919/Fax: 86-21-6859-5911

OMRON ELECTRONIC COMPONENTS CO., LTD.
307, Teheran Office Bldg. #707-38,
Yeoksam-dong, Gangnam-gu, Seoul, Korea
Tel:(82)2-567-5020/Fax:(82)2-567-5804

Authorized Distributor:

© OMRON Corporation 2013 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

Cat. No. G079-E1-01

0813 (0813)