



Dec.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

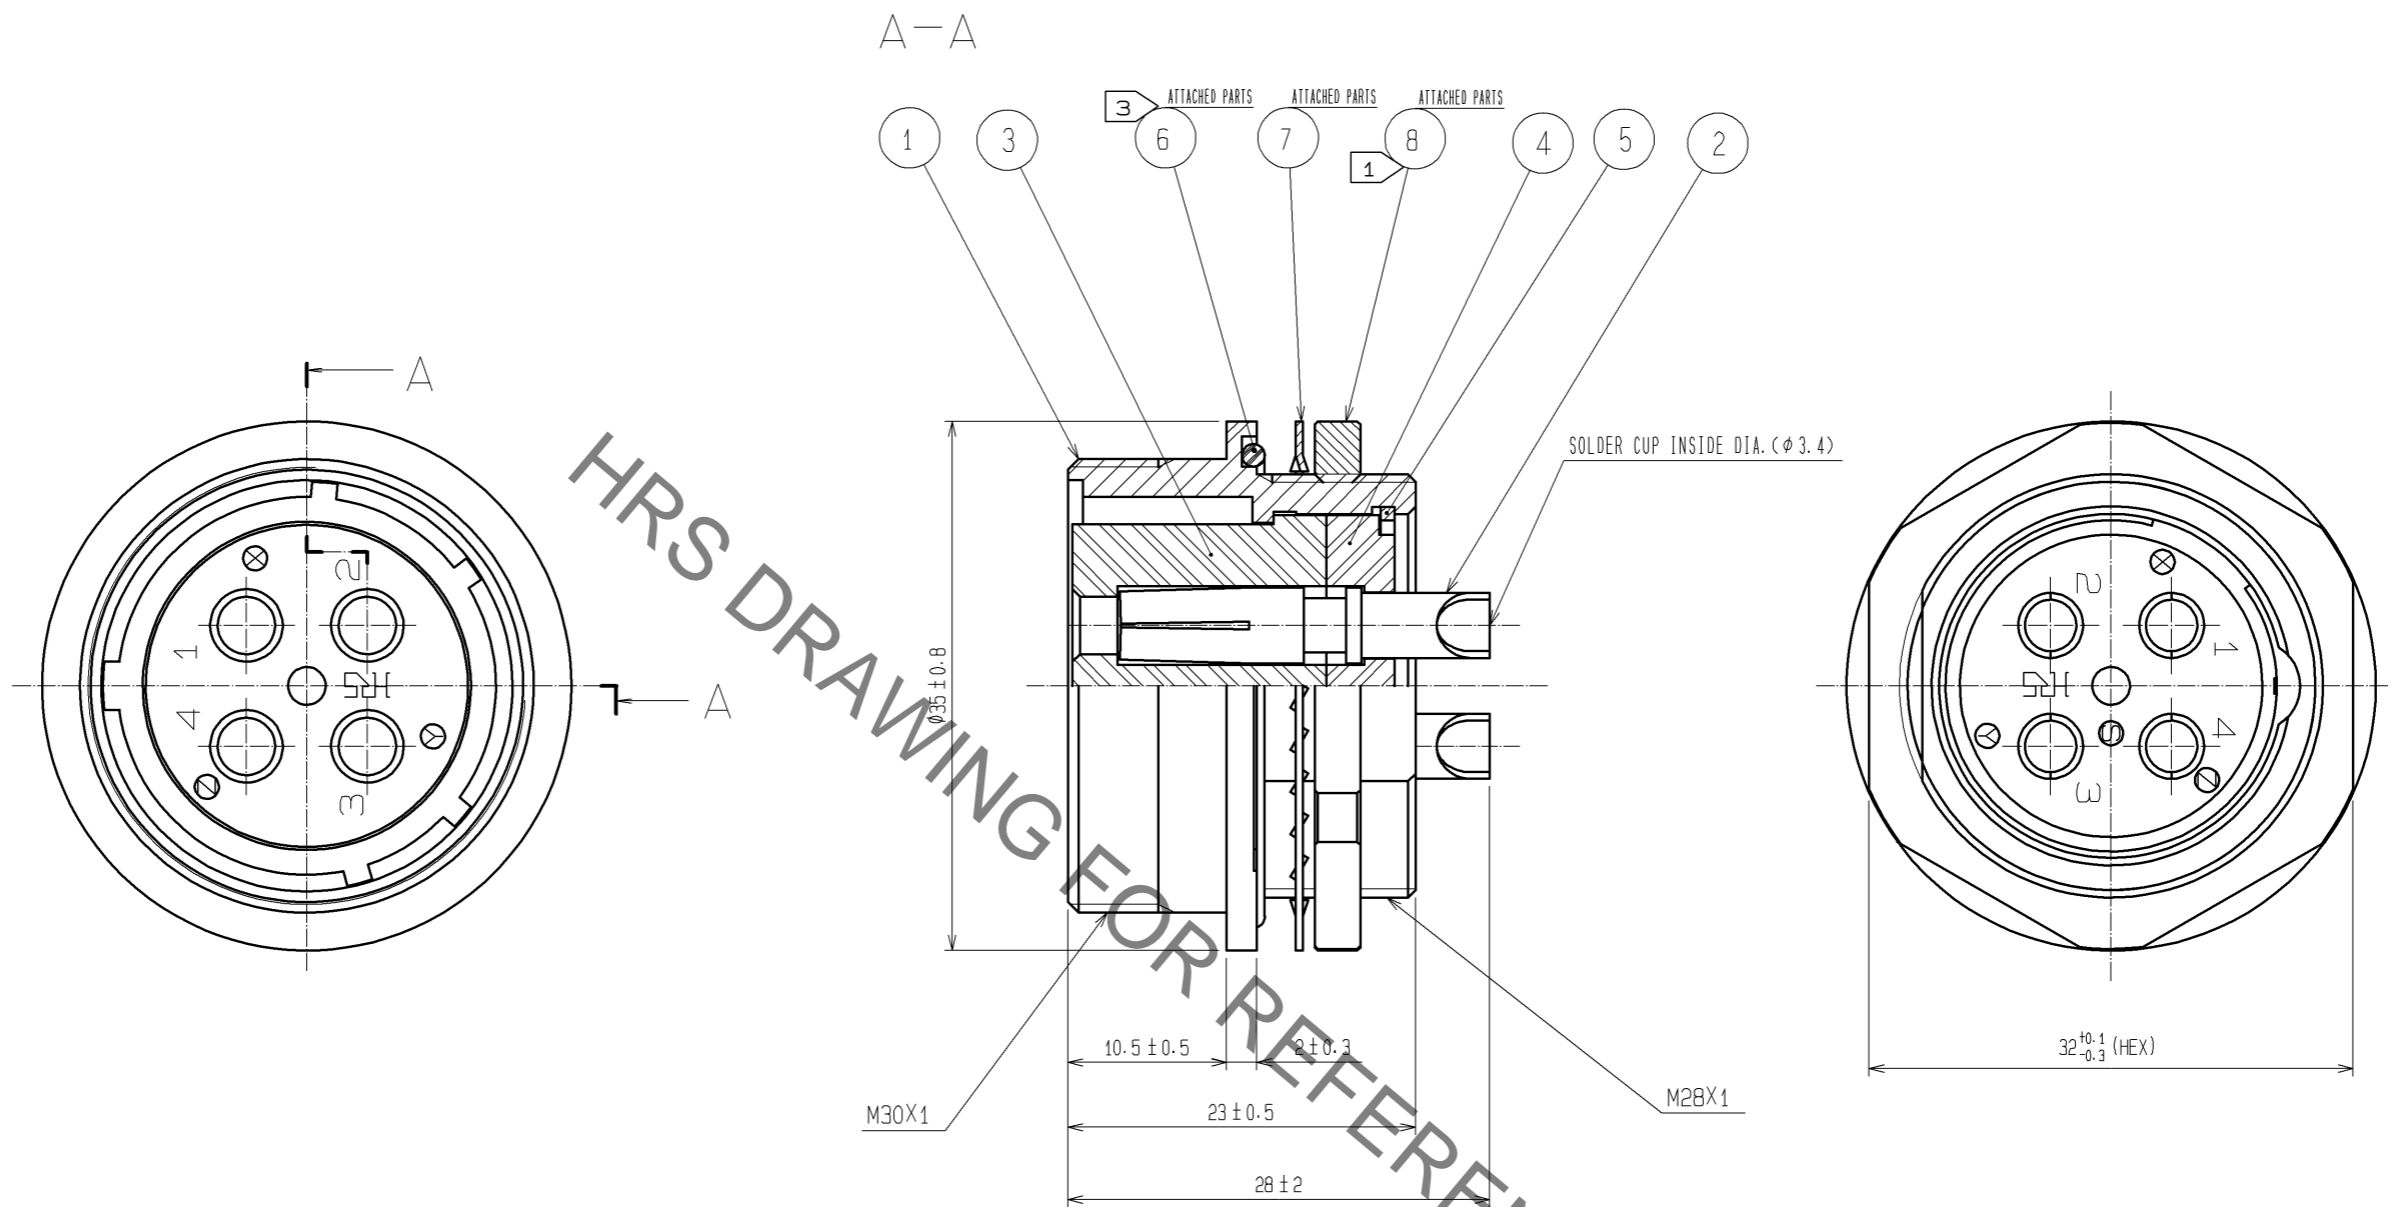

HRS DRAWING FOR REFERENCE

PANEL CUTOUT

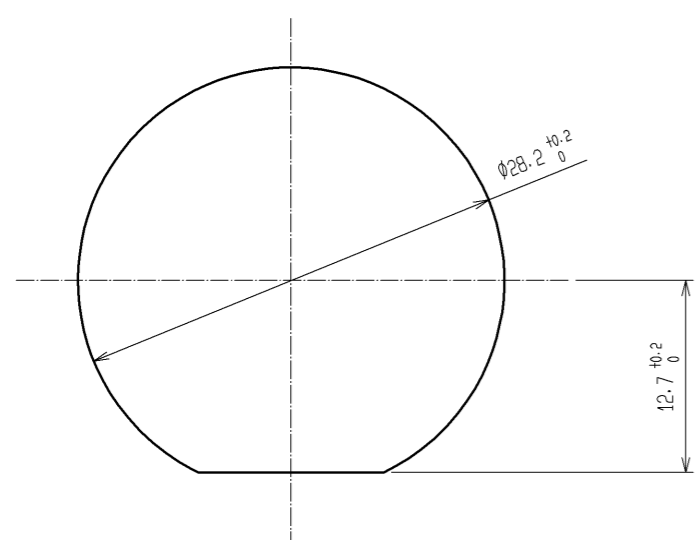

NOTES
 1 THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑧ SHALL BE 2 TO 4N · m.
 2 ROTATIONAL DIRECTION OF THE SOLDER CUP OF REF. NO. ② SHOWS AN EXAMPLE.
 3 WHEN MOUNTED ON CHASSIS, BE CAREFUL THAT REFERENCE NO. ⑥ IS FITTED INTO THE INDICATED GROOVE ANY BITING.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
4	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	8	BRASS	NICKEL PLATING
3	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	7	PHOSPHOR BRONZE	NICKEL PLATING
2	PHOSPHOR BRONZE	SILVER PLATING 2μm min.	6	SILICONE RUBBER	(BLACK)
1	ZINC ALLOY	BLACK CHROME PLATING	5	PHOSPHOR BRONZE	NICKEL PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : E.J. KUNII			13. 09. 09	DRAWING NO. EDC3-118116-00		
CHECKED : HY. KISHI			13. 09. 09	PART NO. JR25WRHA-4S		
DESIGNED : HK. NAMAI			13. 09. 09	CODE NO. CL114-1135-6-00		
DRAWN : HK. NAMAI			13. 09. 09	△ 1/1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[JR25WRHA-4S](#)