



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REV, RDRW, & SM PKG PER 0720-0040-93	3-29-93	—	DAP
	D1	REVISED PER ECO-17-008808	09FEB2018	RS	DR

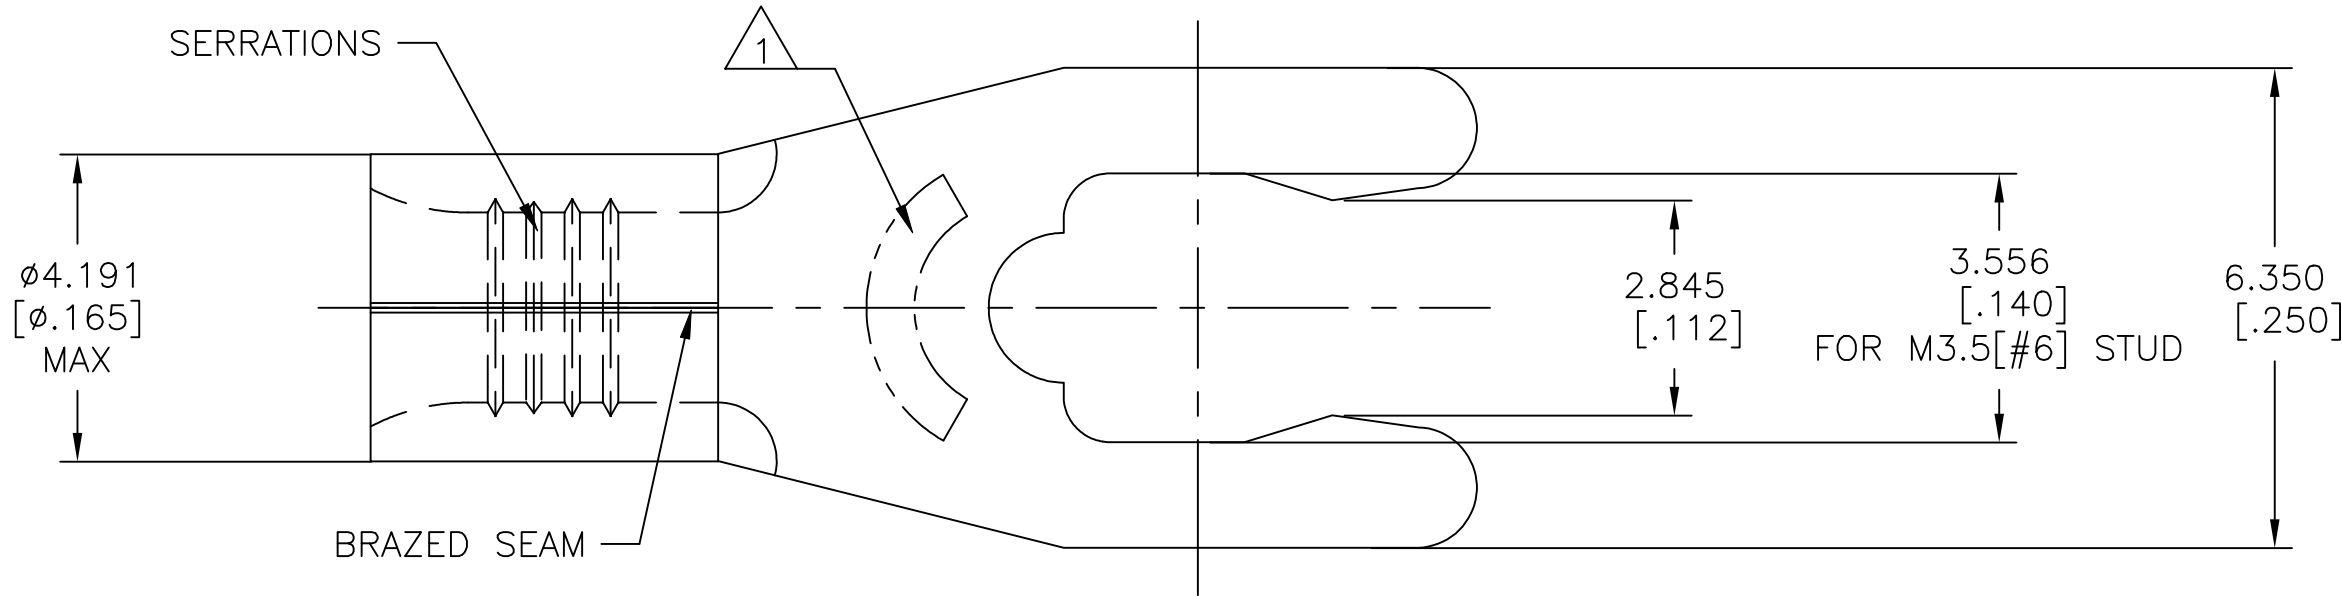

1 STAMP 6S AMP 16-14* APPROX AS SHOWN
6S INDICATES STUD SIZE

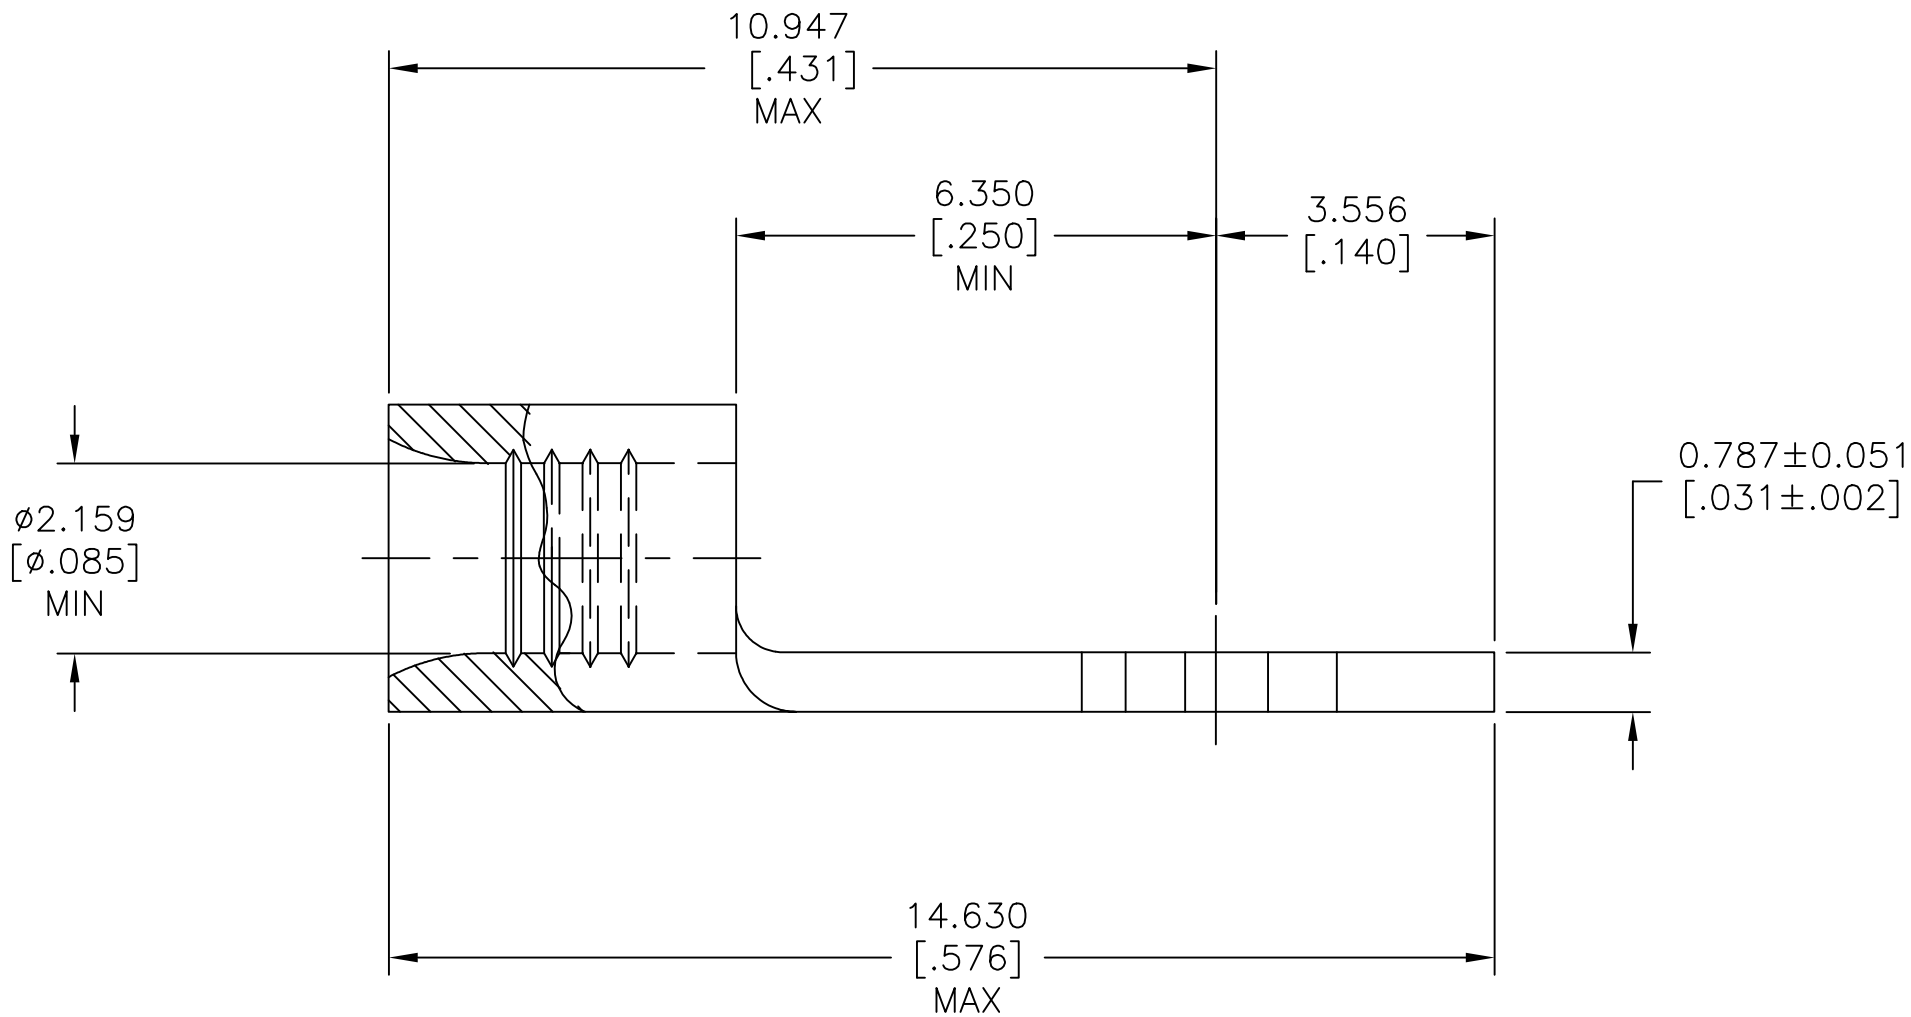

5000	ON TAPE	53123-2
1000	LOOSE PIECE	53123-1
QUANTITY	PACKAGING TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN TA BRINKMAN 3-29-93 CHK DA PATTERSON 3-29-93 APVD DE MILLER 3-29-93 PRODUCT SPEC APPLICATION SPEC WEIGHT			NAME TERMINAL, SHORT SPRING SPADE, SOLISTRAND™ 16-14 AWG		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 170°C [338°F] MAX	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± - FINISH	PHOSPHOR BRONZE PER ASTM B-103 ANNEALED	TIN PLATE 0.00254[.000100] MIN THK PER ASTM B545	SCALE	10:1	SHEET	1 OF 1
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: NOT APPLICABLE									
TOOLING INFORMATION	1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE, 1.04-2.62mm²[2,050-5,180] CIR MILS SOLID OR STRANDED									
FOR ORDER ENTRY	1-800-526-5142										
						CUSTOMER DRAWING			REV	D1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[53123-2](#)