




AMP | AMP CAP

TE Internal #: 1-640507-0
Rectangular Power Connectors, Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 2 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, AMP CAP

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

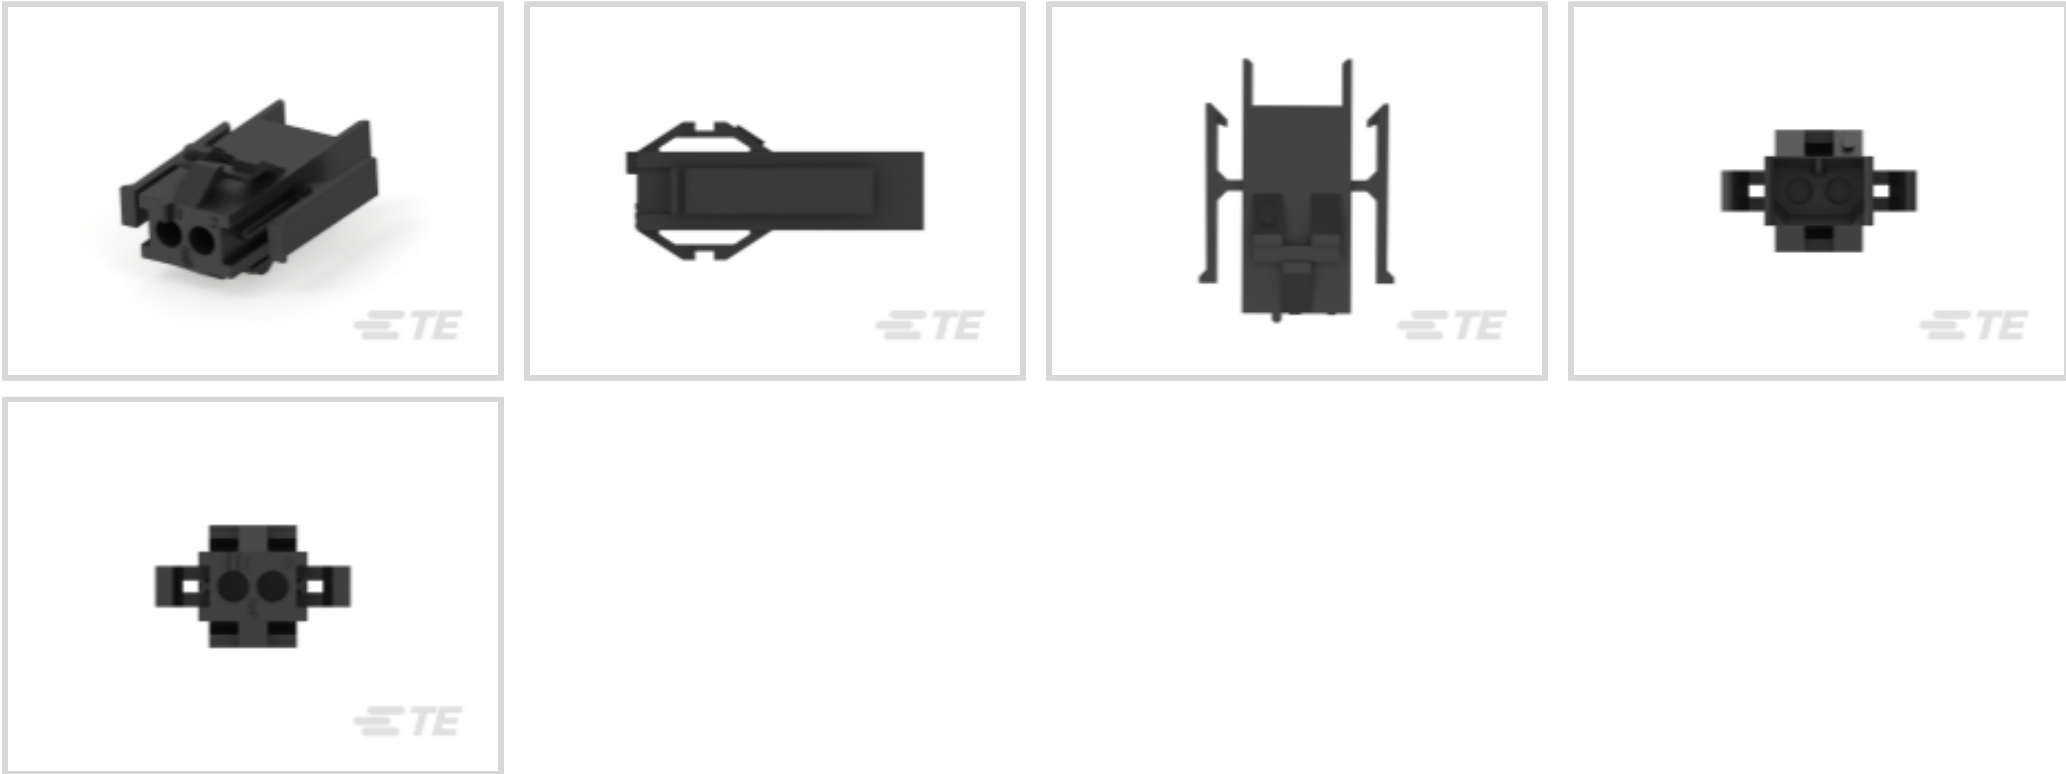

Rectangular Power Connector Type: **Housing**
Connector & Housing Type: **Receptacle**
Connector System: **Wire-to-Panel, Wire-to-Wire**
Number of Positions: **2**
Centerline (Pitch): **4.2 mm [.165 in]**

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Panel, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	2
Number of Power Positions	0
Number of Signal Positions	2
Number of Rows	1

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Contact Features

Contact Current Rating (Max)	9 A
------------------------------	-----



Contact Retention Within Housing	With
Contact Type	Pin

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Mating Retention	With
Panel Mount Feature	Without
Mating Retention Type	Positive Lock
Connector Mounting Type	Panel Mount

Housing Features

Centerline (Pitch)	4.2 mm [.165 in]
Housing Color	Black
Housing Material	PA 66

Dimensions

Connector Height	7.37 mm [.29 in]
Product Width	12.95 mm [.51 in]
Product Length	26.92 mm [1.06 in]
Compatible Insulation Diameter Range	2.92 mm [.115 in]
Wire Size	.12 – .8 mm ²
Row-to-Row Spacing	4.19 mm [.165 in]

Usage Conditions

Operating Temperature Range	-55 – 85 °C [-67 – 185 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

CSA Rating	LR 7189
UL Rating	Recognized
Agency/Standard	CSA, UL
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire



Packaging Features

Packaging Quantity	200
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | AMP CAP



PCB Terminals(2)



Quick Disconnects(1)




Rectangular Power Connectors(9)


Customers Also Bought




TE Part #640251-6
06P SL156 HSG W/O LCK RAMP

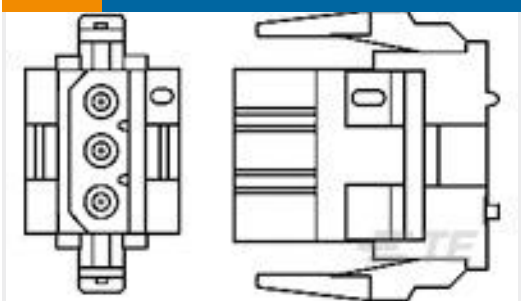

TE Part #1-640518-0
03P MR II PLUG HSG

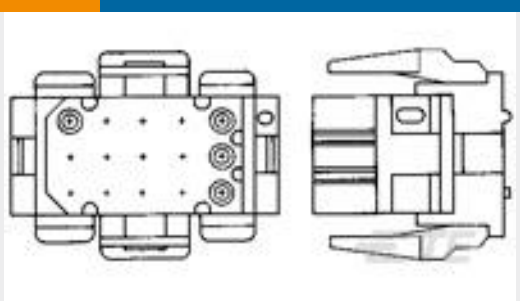


TE Part #1-640519-0
04P MR II PLUG HSG

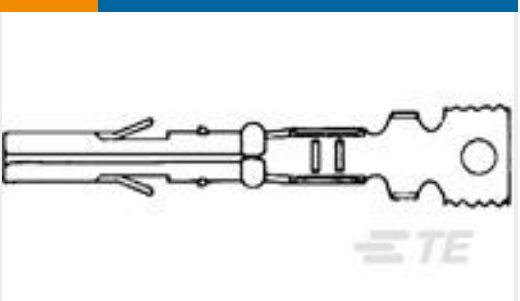


TE Part #641300-1
MR RECPT PTPHBZ LP 26-18




TE Part #211076-1
SINGLE CIR METRIMATE

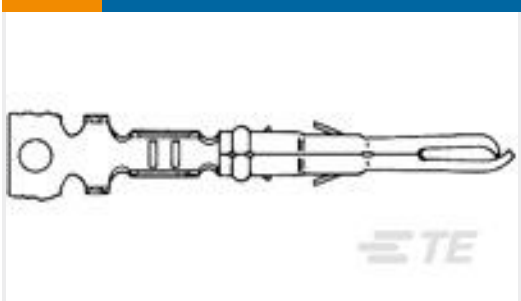

TE Part #350967-1
MR PIN PTPPHBZ

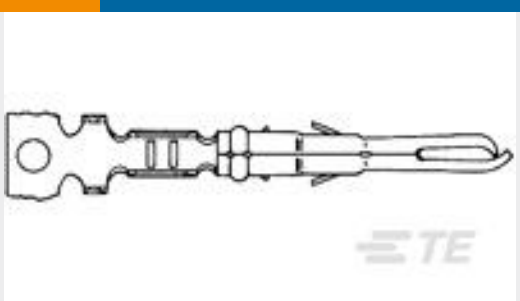


TE Part #350967-2
MR PIN AU/PHBZ

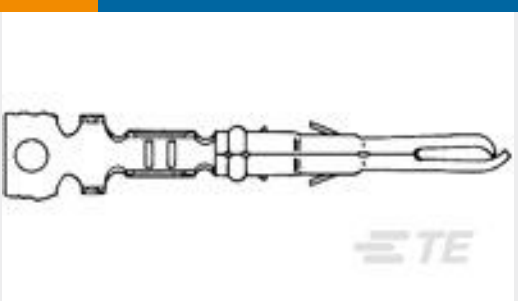

TE Part #640579-2
MR SPLIT PIN AUPHBRZ LP 26-24



TE Part #2377780-1
36POS,AMP MCP 1.5K,REC HSG ASSY, UNSLD

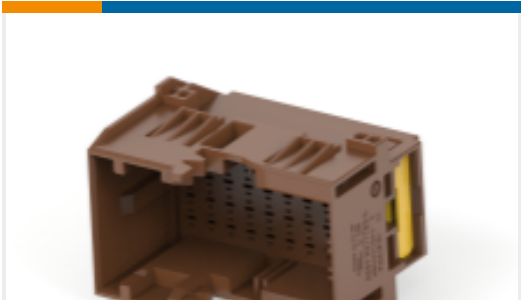

TE Part #2377783-1
36POS,AMP MCP 1.5K,TAB HSG ASSY, UNSLD

Documents

Product Drawings

02P MR II CAP HSG

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-640507-0_AH.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_1-640507-0_AH.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-640507-0_AH.3d_stp.zip](#)

English

3D PDF

English

Customer View Model

[ENG_CVM_1-640507-0_H.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_1-640507-0_H.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_1-640507-0_H.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)

English

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[MD_1-640507-0_021920182237_dmtec](#)

English

[MD_1-640507-0_021920182237_dmtec](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

[AMP* MINIATURE RECTANGULAR II \(MRII\) CONNECTORS](#)

English

Agency Approvals

[Agency Approval Document](#)

English