




TE Internal #: 1-2321922-3

Wire Seal, -30 – 105 °C [-22 – 221 °F], Blue, Silicone Rubber, 2

Position

[View on TE.com >](#)

Connectors > Connector Accessories > Connector Seals & Cavity Plugs

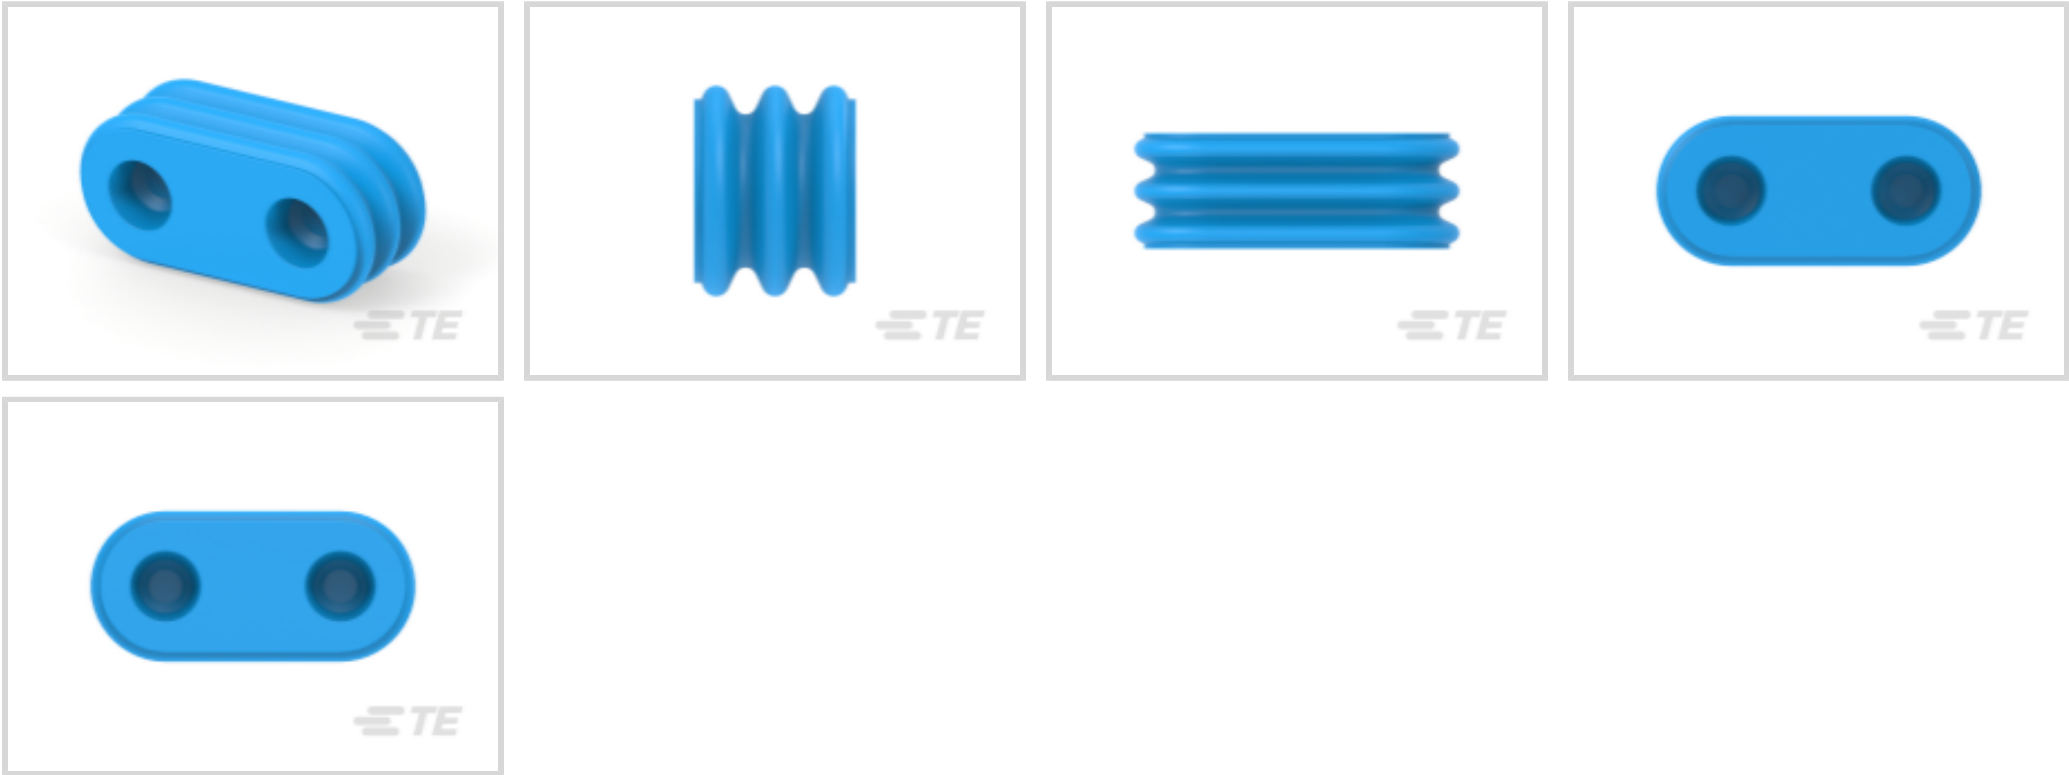

Connector Seal & Plug Type: **Wire Seal**

Operating Temperature Range: -30 – 105 °C [-22 – 221 °F]

Primary Product Color: **Blue**

Primary Product Material: **Silicone Rubber**

Operating Temperature (Max): 105 °C [221 °F]

Features

Product Type Features

Connector Seal & Plug Type	Wire Seal
----------------------------	-----------

Configuration Features

Number of Positions	2
---------------------	---

Body Features

Primary Product Color	Blue
Primary Product Material	Silicone Rubber

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operating Temperature (Max)	105 °C[221 °F]

Packaging Features

Packaging Method	Bag
------------------	-----

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # CAT-526SDL-SEALHS
Sealed Connector Housings: 2.5 mm, Signal Double Lock


Customers Also Bought



TE Part #63688-1
250 FASTON REC 18-14 AWG NPST

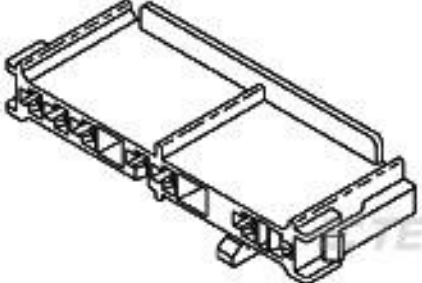


TE Part #521085-1
DRYER .250 HOUSING NYLON 6/6

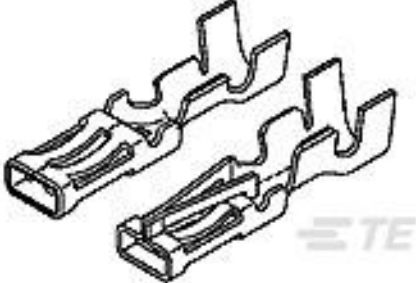

TE Part #770642-1
TIMER CONNECTOR TERMINAL 20-14 AWG PTPBR



TE Part #964203-1
STD PW TIMER CONTACT

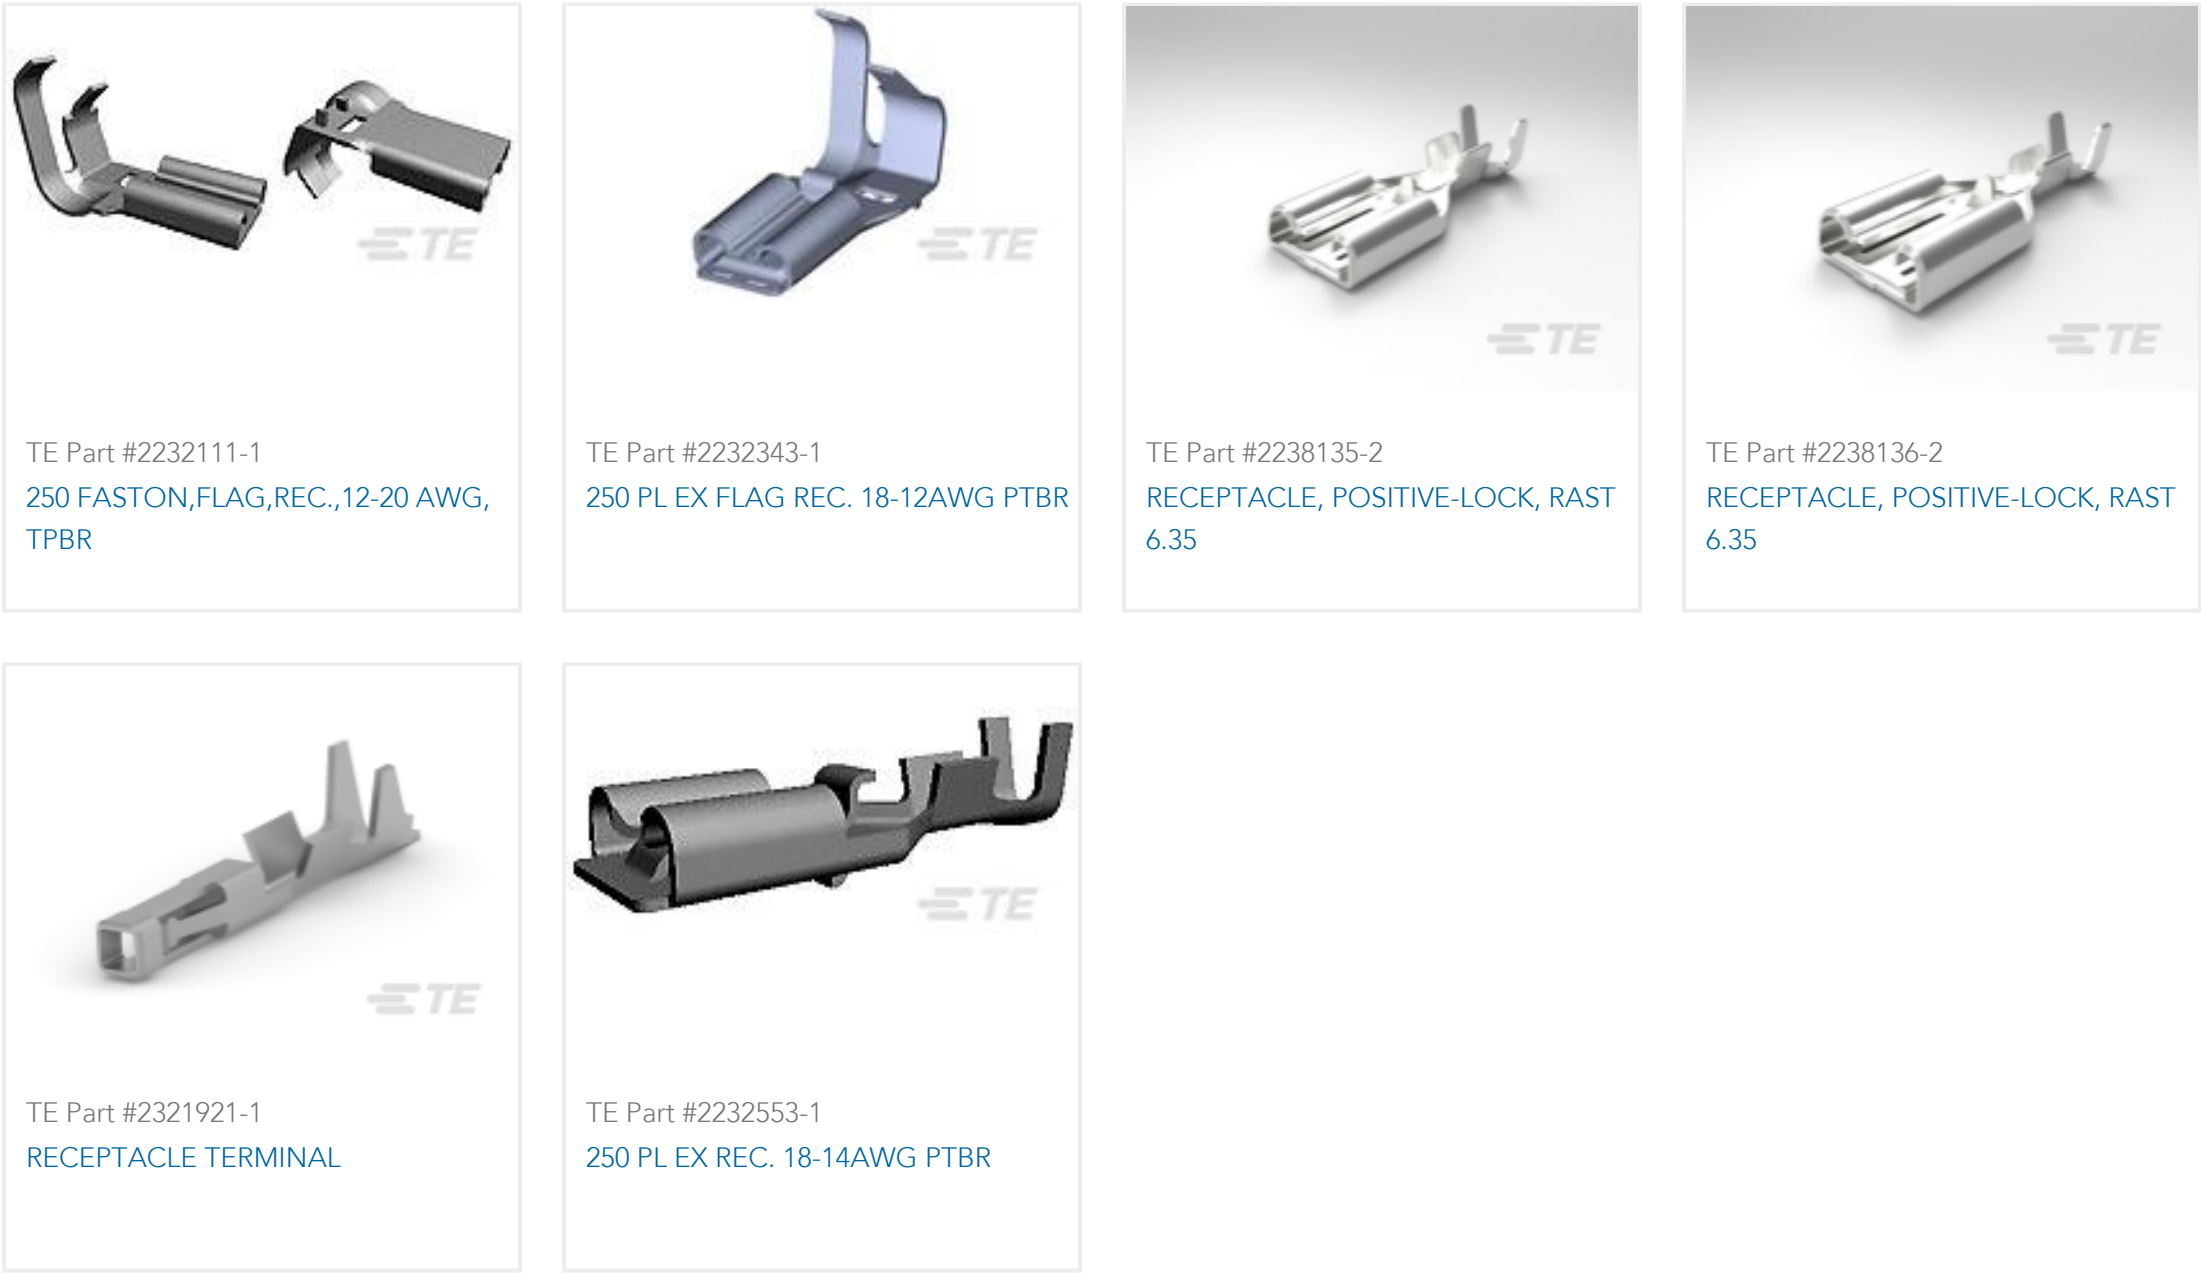

Documents

Product Drawings
REAR WIRE SEAL 3PIN, #2 BLOCKED
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1-2321922-3_A.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_1-2321922-3_A.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_1-2321922-3_A.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications
Waterproof Signal Double Lock Connector System - Application Specification
English

Instruction Sheets
Instruction Sheet (non U.S.)
English