

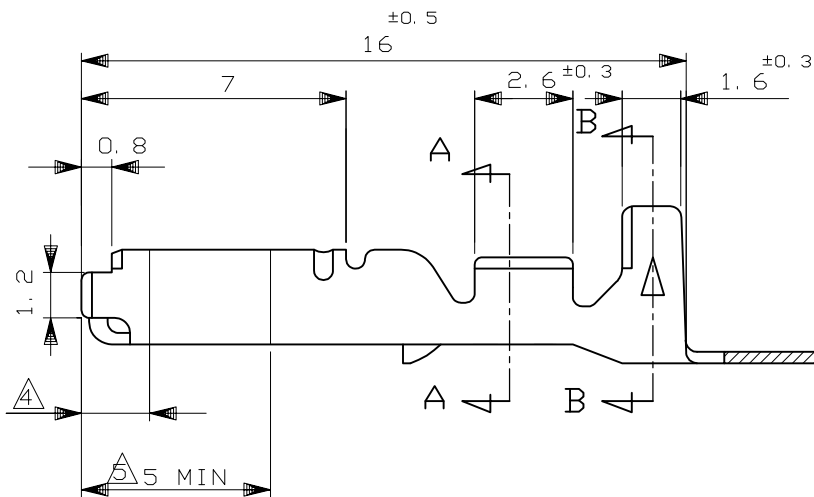
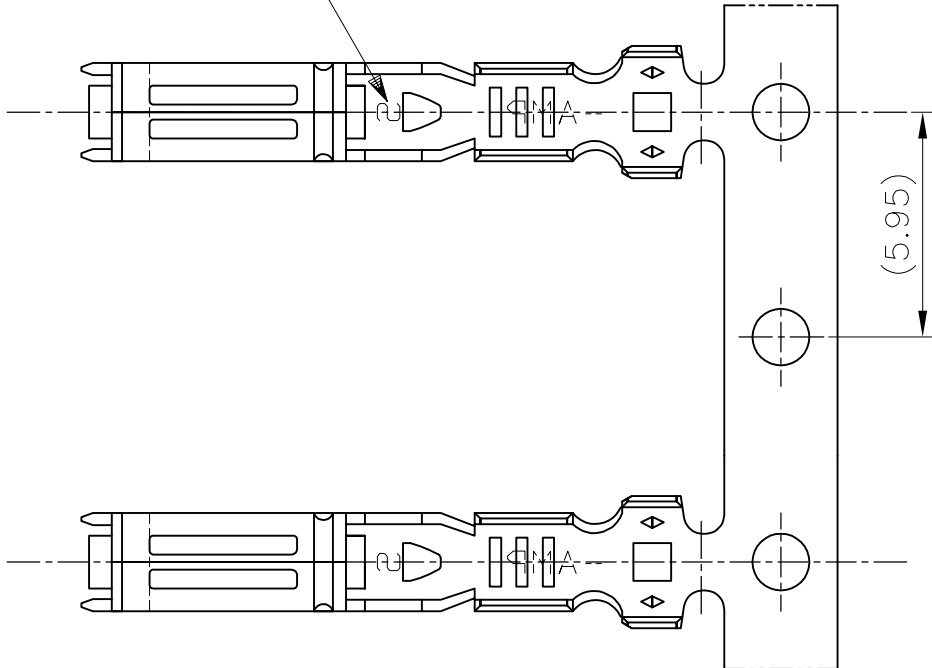



WIRE RANGE ID MARK  
<"S" SIZE MARK>  
<STAMPED ON BOTTOM>  
端子識別マーク"S"  
(底面に刻印)

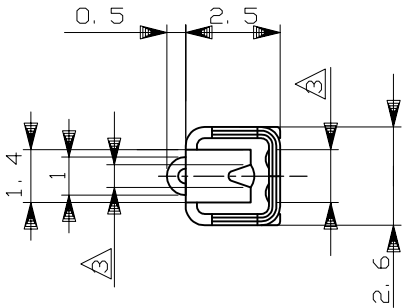


| REVISIONS |     |             |               |           |       |
|-----------|-----|-------------|---------------|-----------|-------|
| P         | LTR | DESCRIPTION |               | DATE      | APVD  |
|           | G1  | REVISED     | ECR-19-018615 | 17JUL2020 | DM HK |




断面 A-A  
SECT A-A



断面 B-B  
SECT B-B



断面 A-A  
SECT A-A  
(175026のみ適用)  
(ONLY 175026)



断面 B-B  
SECT B-B  
(175026のみ適用)  
(ONLY 175026)

- 製品規格 ; 108-5216, 108-5231, 108-5264
- 取付適用規格 ; 114-5091
- 部分金めっき (接触面のみ)
- 識別用金めっき (全周)
- 部分金めっき (両側のみ)

- SPEC; 108-5216, 108-5231, 108-5264
- APPLICATION SPEC; 114-5091
- SELECTIVE GOLD PLATING (ONLY CONTACT SIDE)
- GOLD PLATING FOR DISCERNMENT (ALL AROUND)
- SELECTIVE GOLD PLATING (ONLY BOTH SIDES OF THE BOX)

| TOLERANCE UNLESS OTHERWISE SPECIFIED:<br>一般公差 |         |
|-----------------------------------------------|---------|
| 0<X≤ 10                                       | : ±0.2  |
| 10<X≤ 30                                      | : ±0.25 |
| 30<X≤ 100                                     | : ±0.3  |
| ANGLE                                         | : ±3°   |

WIRE RANGE  
AVS 0.2~0.3mm<sup>2</sup>  
(AWG#24-#22)

INSULATION DIA.  
1.4~1.9 mmφ

|                                                                             |  |                               |                                                                                                       |                    |                        |
|-----------------------------------------------------------------------------|--|-------------------------------|-------------------------------------------------------------------------------------------------------|--------------------|------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                      |  | DWN<br>T.SAGAWA<br>9/28'87    |  TE Connectivity |                    |                        |
| DIMENSIONS:<br>mm                                                           |  | CHK<br>M.MATSUSAKA<br>10/6'87 |                                                                                                       |                    |                        |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:                                      |  | APVD<br>M.NOGUCHI<br>10/7'87  | NAME                                                                                                  |                    |                        |
| 0 PLC ± -<br>1 PLC ± -<br>2 PLC ± -<br>3 PLC ± -<br>4 PLC ± -<br>ANGLES ± - |  | PRODUCT SPEC                  | 070 SERIES RECEPTACLE CONTACT                                                                         |                    |                        |
| MATERIAL<br>SEE TABLE                                                       |  | FINISH<br>SEE TABLE           | SIZE<br>A3                                                                                            | CAGE CODE<br>00779 | DRAWING NO<br>C-173630 |
|                                                                             |  |                               | WEIGHT<br>-                                                                                           | RESTRICTED TO<br>- |                        |
| CUSTOMER DRAWING                                                            |  |                               | SCALE<br>5:1                                                                                          | SHEET<br>1 OF 1    | REV<br>G1              |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[173630-6](#)