

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 2
 Gauge: 26 AWG, 0.14 mm²
 Material: tinned copper strands
 Strand size: ϕ 0.16 x 7
 Resistance at 20 °C: 150 Ω /km max


Outer jacket

Material: PVC
 Color: white
 Diameter: 2.7 \pm 0.15 mm
 Nominal thickness: 0.40 mm
 Resistance at 20 °C: 10 M Ω /km min

Wire marking: E339579 UL AWM STYLE 2468 26 AWG 80°C 300V VW-1 --- CUL AWM I A 80°C 300V FT1 TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 \pm 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 \pm 1 °C / 1 hour, no observed degradation
 Deformation: 121 \pm 1 °C / 1 hour, \leq 50 %
 Cold bend: -10 \pm 2 °C / 1 hour, no observed cracking

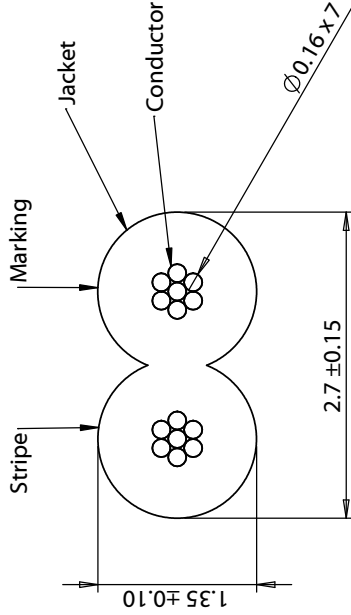

Revision:	Date:	Description:
A	06/27/2014	Initial release
A1	01/08/2016	Corrected tolerances
A2	09/06/2018	Increased operating temperature range

Prepared:
Verified:
Dimensions are in millimeters.
Tolerances:
X: \pm 0.5 mm
X.X: \pm 0.3 mm
X.XX: \pm 0.05 mm

Notes:
RoHS and REACH compliant
Function test: no open, no short circuit, no intermittent
Description: Wire, 2C TS, 26 AWG, UL2468, 300V, 80C, 2.7 mm, VW-1, PVC, white

TENSILITY	
tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
Size:	Part number:
A	30-00408
Scale: 15:1	Sheet 1 of 1