
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H1	REVISED PER ECO-11-004820	11MAR11	RK	HMR
	H2	REVISED PER ECO-18-009926	26JUN2018	RS	DR

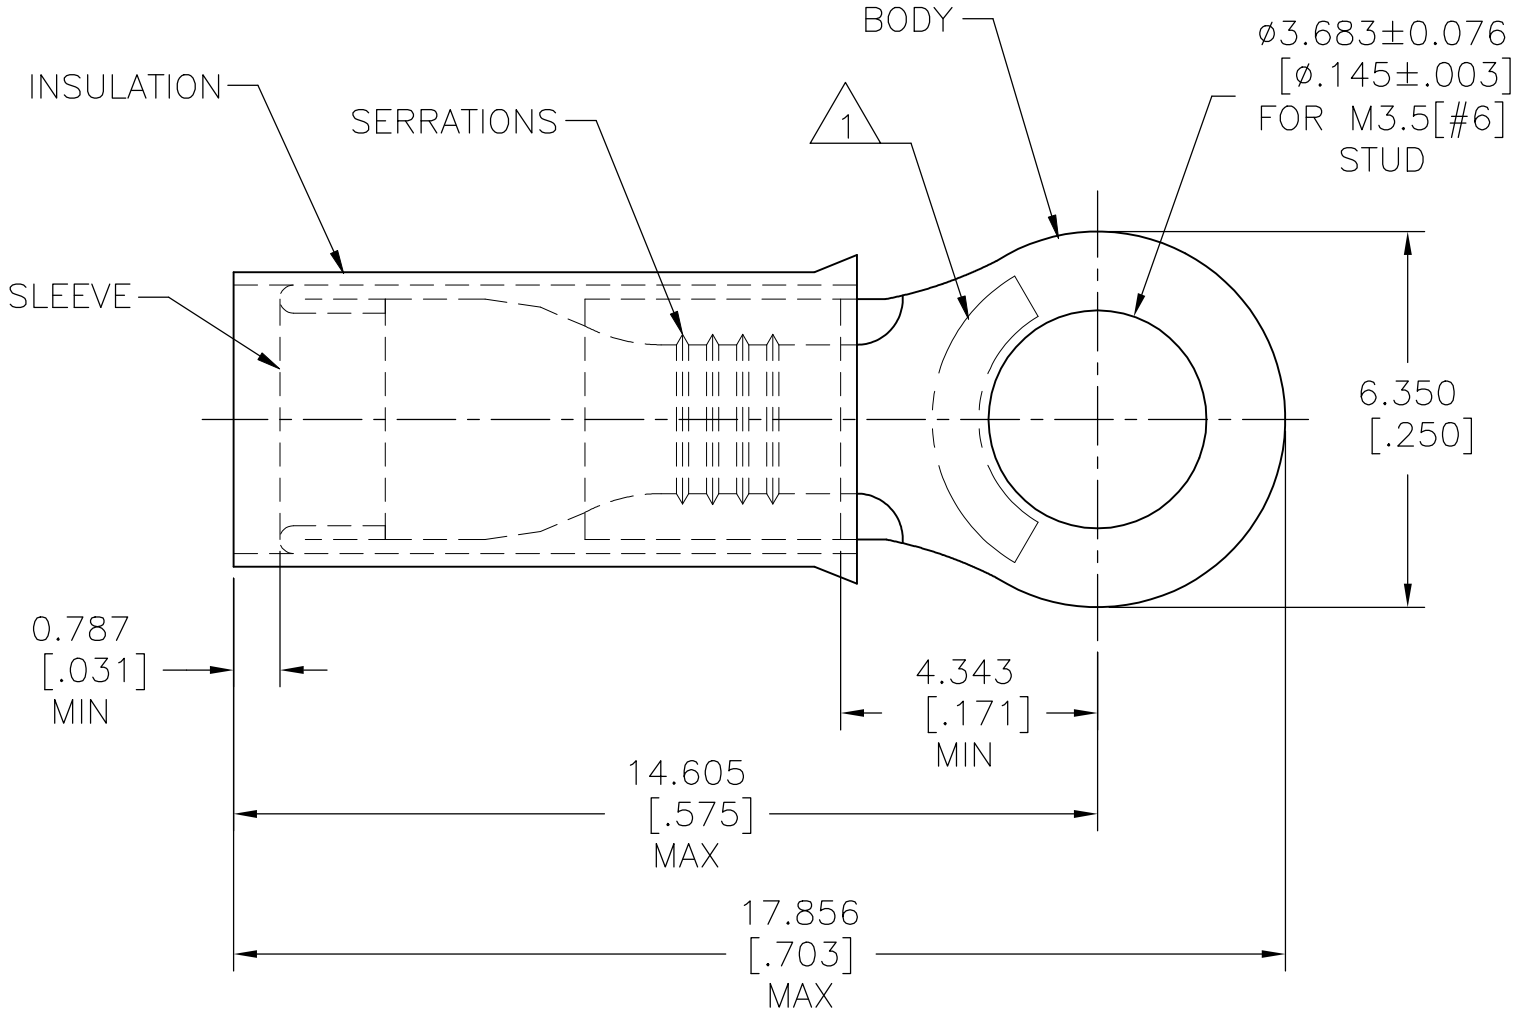

AMP WIRE RANGE	UL Listed	CSA LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

1 STAMP AMP 16-14*, APPROX AS SHOWN. STAMP MAY BE ON TOP OR BOTTOM

2 BODY THICKNESS IS 0.787±.051[.031±.002]

3 FOR 2.921 – 4.318[.115 – .170] WIRE INSULATION DIA

4 MAX RECOMMENDED OPERATING TEMP IS 105°C[221°F]

5 300 VOLT MAX RATING

6 WIRE CROSS SECTIONAL AREA RANGE 1.04-2.62mm [2,050-5,180 CIR MILS]

QTY	PACKAGING	MATERIAL / FINISH	PART NO
100	LOOSE PIECE, BOX	BODY & SLEEVE: COPPER PER ASTM B152 TIN PL. PER ASTM B-545	8-320619-1
5000	ON TAPE, REEL		2-320619-1
1000	LOOSE PIECE	INSULATION: NYLON COLOR: BLUE	320619

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± 0.127[.005]
4 PLC ± –
ANGLES ± 1°

MATERIAL –

FINISH –

DWN RAVI S 26JUN2018
CHK ROHDE DANIEL F 26JUN2018
APVD ROHDE DANIEL F 26JUN2018
PRODUCT SPEC UL486A-B
APPLICATION SPEC 114-2157
WEIGHT

TE Connectivity Ltd.

NAME
WIRE TERMINAL
PIDG, RING TONGUE
WIRE SIZE: 16-14 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-320619	–

CUSTOMER DRAWING | SCALE 8:1 | SHEET 1 OF 1 | REV H2

1470-19 (1/15)

Downloaded from Arrow.com