

|                                                                                   |              |             |             |           |
|-----------------------------------------------------------------------------------|--------------|-------------|-------------|-----------|
|  | Doc. No.     | DM-A0162-10 | Page No.    | 1/7       |
|                                                                                   | Date Issued  | 2020-04-06  | Prepared by | Josephine |
|                                                                                   | Date revised | 2020-11-23  | checked by  | Jay       |
| <b>Product Specification</b>                                                      | Rev. No.     | 01          | Approved by | Mei Chen  |
| <b>Title:</b> MICRO SWITCH 微动开关                                                   |              |             |             |           |

## 1. SCOPE ( 适用范围 )

This specification covers the performance, tests and quality requirements for the micro switch.  
本规范涵盖了盖微动开关的性能、测试和质量要求。XKB Connectivity)

## 2. PRODUCT DESCRIPTION ( 产品描述 )

| DESCRIPTION ( 描述 )                               | Part Number ( 料号 ) |
|--------------------------------------------------|--------------------|
| W12.7xD5.7xH6.6小型微动开关 0.5A 125V 弧形下弯,柄长14.1MM,直脚 | DM1-141UP-1        |
|                                                  |                    |
|                                                  |                    |
|                                                  |                    |
|                                                  |                    |
|                                                  |                    |
|                                                  |                    |
|                                                  |                    |
|                                                  |                    |
|                                                  |                    |
|                                                  |                    |
|                                                  |                    |

## 3. APPLICABLE DOCUMENT ( 适用文件 )

The following documents form a part of this specification to the extent specified herein. In the event of conflict between the requirements of this specification and the product drawing, the product drawing shall take precedence. In the event of conflict between the requirements of this specification and the referenced documents, this specification shall take precedence. ( 下列文件构成本规范的一部分，在此规定的范围内。本规范要求与产品图纸有冲突时，以产品图纸为准。如果本规范的要求与参考文件发生冲突，应以本规范为准。 )

## 4. REQUIREMENTS ( 要求 )

### 4.1. Design and Structure ( XKB CONNECTIVITY 设计和结构 )

Product shall be of the design, structure and physical dimensions specified on the applicable product drawing. ( 产品的设计、结构和物理尺寸参考所适用的产品图纸 )

### 4.2. Materials/ Finish (XKB CONNECTIVITY 材料/表面处理)

|                                                                                   |              |             |             |           |
|-----------------------------------------------------------------------------------|--------------|-------------|-------------|-----------|
|  | Doc. No.     | DM-A0162-10 | Page No.    | 2/7       |
|                                                                                   | Date Issued  | 2020-04-06  | Prepared by | Josephine |
|                                                                                   | Date revised | 2020-11-23  | checked by  | Jay       |
| Product Specification                                                             | Rev. No.     | 01          | Approved by | Mei Chen  |
| Title: MICRO SWITCH 微动开关                                                          |              |             |             |           |

Materials used in the structure of product shall be as specified on the applicable product drawing. (产品结构中使用的材料参考所适用的产品图纸)

#### 4.3. Ratings ( 额定功率 )

| Item ( 项目 )                       | Standard ( 标准 )                                         |
|-----------------------------------|---------------------------------------------------------|
| Rated Voltage (Maximum)额定电压       | 125V DC                                                 |
| Rated Current (Maximum)额定电流       | 0.5A                                                    |
| Operating temperature range工作温度范围 | -40°C to +85°C<br>From -40°C to +85°C degree centigrade |
| Storage Temperature Range储存温度范围   | -40°C ~ +85°C<br>From -40 to +85 degree centigrade      |

#### 5. TEST STANDARD ( 测试条件 )

5.1 Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests are as follows ( 除另有说明外，用以进行测量和测试的标准环境条件范围如下 )

Ambient temperature ( 环境温度 ) : 5°C to 35°C

Normal humidity ( 正常湿度 ) : 45% to 85%

Air pressure ( 气压 ) : 86Kpa to 106Kpa

5.2 However if doubt arises on the decision based on the measured Values under the above-mentioned Conditions. The following conditions shall be employed: ( 但是在对判定产生疑问时,按下述状态实施 )

Temperature ( 温度 ) : 20±2°C

Relative humidity ( 相对湿度 ) : 65±5%

Air pressure ( 气压 ) : 86Kpa to 106Kpa

|                                                                                   |              |             |             |           |
|-----------------------------------------------------------------------------------|--------------|-------------|-------------|-----------|
|  | Doc. No.     | DM-A0162-10 | Page No.    | 3/7       |
|                                                                                   | Date Issued  | 2020-04-06  | Prepared by | Josephine |
|                                                                                   | Date revised | 2020-11-23  | checked by  | Jay       |
| <b>Product Specification</b>                                                      | Rev. No.     | 01          | Approved by | Mei Chen  |
| <b>Title:</b> MICRO SWITCH 微动开关                                                   |              |             |             |           |

## 8. PERFORMANCE AND TEST DESCRIPTION (性能和测试类型)

### 8.1 APPEARANCE (外观)

| ITEM | DESCRIPTION (类型)          | TEST CONDITION (测试条件) | REQUIREMENT (要求)                                                                               |
|------|---------------------------|-----------------------|------------------------------------------------------------------------------------------------|
| 1    | <b>Appearance</b><br>(外观) | <b>Visual.</b> (目视)   | <b>Should not have any flaw<br/>Scratch discoloration and<br/>crushed</b> (无任何裂痕、刮伤、<br>污染和变形) |

### 8.2 ELECTRICAL (电气)

| ITEM | DESCRIPTION (类型)                                | TEST CONDITION (测试条件)                                                                                                                                                                                                      | REQUIREMENT (要求)                                      |
|------|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| 2    | <b>Low level contact<br/>resistance.</b> (接触电阻) | <b>To be measure with AC 1KHz±200Hz<br/>(Max 20mv,Max 50mA)or 0.1mA,12V<br/>DC</b> (在 1 千赫兹±200 赫兹 AC mV, 或<br>0.1mA, 12V DC 电流下测试)                                                                                        | <b>100 mΩ Max.</b>                                    |
| 3    | <b>Insulation<br/>Resistance.</b> (绝缘电阻)        | <b>Measurements shall be made following<br/>application of DC100V potential between<br/>terminals and between individual<br/>terminals and frame for one minute.</b> (在<br>端子与端子之间, 端子与外壳之间施加<br>DC100V, 一分钟, 测量相邻两端的绝缘电阻) | <b>100 MΩ min.</b>                                    |
| 4    | <b>Dielectric strength.</b> (耐<br>电压)           | <b>AC 250 V (50Hz or60Hz) shall be applied<br/>between terminals and between<br/>individual terminals and frame for one<br/>minute.</b> (在端子与端子之间, 端子与外壳之间<br>施加 AC250V(50HZ-60HZ))                                        | <b>There shall be no<br/>breakdown.</b><br>(无击穿、闪烁现象) |

### 8.3 MECHANICAL (机械)

| ITEM | DESCRIPTION (类型) | TEST CONDITION (测试条件) | REQUIREMENT (要求) |
|------|------------------|-----------------------|------------------|
|------|------------------|-----------------------|------------------|

|                                                                                   |              |             |             |           |
|-----------------------------------------------------------------------------------|--------------|-------------|-------------|-----------|
|  | Doc. No.     | DM-A0162-10 | Page No.    | 4/7       |
|                                                                                   | Date Issued  | 2020-04-06  | Prepared by | Josephine |
|                                                                                   | Date revised | 2020-11-23  | checked by  | Jay       |
| Product Specification                                                             | Rev. No.     | 01          | Approved by | Mei Chen  |
| Title: MICRO SWITCH 微动开关                                                          |              |             |             |           |

|   |                                         |                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                   |
|---|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5 | XKB Connectivity Actuating Force (动作力)  | Place the switch such that the direction of switch operation is vertical and then gradually increase the load applied to the center of the stem, the maximum load required for the stem to come to a stop shall be measured. (开关的动作方向为垂直放置开关向推柄中心逐渐地增加负荷直到推柄停止时所测量的最大负荷) | 30±30g                                                                                                                                                                                                                                                            |
| 6 | Terminal strength<br>端子强度               | A static load of 400gf shall be applied To the terminal for 1 minute in any direction. (在排脚前端任意一个方向加 400gf 力度测试, 时间为 1 分钟)                                                                                                                                               | Electrical characteristics shall be satisfied without damage or excessive looseness of terminals. (在排脚中没有裂开. 松动等异常, 满足于机械、电器性能)                                                                                                                                   |
| 7 | Displacement of actuator (knob)<br>推柄强度 | Fixed switch so that the switch is perpendicular to the direction of operation and exerts 2 Kgf force in the opposite direction of the push handle for 1 minute. (固定开关, 使开关与操作方向垂直, 以推柄动作方向反方向施加 2Kgf 力持续 1 分钟)                                                          | The handle is not seriously deformed and can work normally. (柄部无严重变形, 可以正常工作)                                                                                                                                                                                     |
| 8 | LIFE TEST<br>寿命试验                       | Endurance without loading: A switch shall be subjected to 50,000 cycles at a speed of 15 to 18 cycles per minute without loading. (在负荷的条件下以每分钟 15~18 回的速度进行 50,000 次的测试)                                                                                                 | (1) Contact Resistance (接触电阻): 100mΩ MAX.<br>(2) Insulation resistance (绝缘电阻): 100M Ω MIN.<br>(3) Dielectric strength (耐电压): AC 250V, 1 minute.<br>(4) Operating force (作动力): 30±30g<br>(5) Without damage to parts arcing or breakdown etc. (测试后外表无损伤, 并且满足机械性能) |

#### 8.4 ENVIRONMENTAL (环境)

| ITEM | DESCRIPTION (类型) | TEST CONDITION (测试条件) | REQUIREMENT (要求) |
|------|------------------|-----------------------|------------------|
|------|------------------|-----------------------|------------------|

|                                                                                   |              |             |             |           |
|-----------------------------------------------------------------------------------|--------------|-------------|-------------|-----------|
|  | Doc. No.     | DM-A0162-10 | Page No.    | 5/7       |
|                                                                                   | Date Issued  | 2020-04-06  | Prepared by | Josephine |
|                                                                                   | Date revised | 2020-11-23  | checked by  | Jay       |
| Product Specification                                                             | Rev. No.     | 01          | Approved by | Mei Chen  |
| Title: MICRO SWITCH 微动开关                                                          |              |             |             |           |

|    |                                 |                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                          |
|----|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9  | Solder ability<br>(可焊性)         | <p>Test temperature: <math>245 \pm 5^{\circ}\text{C}</math> Test time :5sec During test,the stick detect temperature in the oven.Then switch terminal soak in the oven.It put 2 minute under normal temperature after testing.</p> <p>试验温度: <math>245 \pm 5^{\circ}\text{C}</math> 试验时间: 5s; 试验时以测温棒侦测锡炉温度; 开关端子浸入与焊锡接触, 在时间 f 取出; 测试后再常温下测试后再常温下静止 2 分钟</p>                              | <p>The area must be reach 90% on the surface of switch terminal</p> <p>开关端子上锡面积应达到 90%以上</p>                                                                                                                                                             |
| 10 | Moisture Resistance (耐潮湿)       | <p>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 30 minute before measurements are made: 样品按下列条件进行耐潮湿试验,试验后在正常温度和湿度条件下放置 30 分钟后测定</p> <p>(1) Temperature 温度: <math>40 \pm 2^{\circ}\text{C}</math></p> <p>(2) Relative humidity 相对湿度: 90 to 95%</p> <p>(3) Time 时间: 48 hours</p> <p>Water drops shall be removed.擦除水珠</p> | <p>Contact resistance 接触电阻: <math>100\text{ m}\Omega</math> Max.</p> <p>Insulation resistance 绝缘电阻: <math>100\text{ M}\Omega</math> Min.</p> <p>There shall be no defects in appearance or in the mechanical functions . (无论是在外观上还是在机械功能上, 都不得有任何缺陷)</p> |
| 11 | TLow Temperature Resistance 耐低温 | <p>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 30 minute before measurements are made: 样品按下列条件进行耐低温试验, 试验后在正常温度和湿度条件下放置 30 分钟后测定</p> <p>(1)Temperature 温度: <math>-20 \pm 2^{\circ}\text{C}</math></p> <p>(2)Time 时间: 96 hours</p> <p>Water drops shall be removed.擦除水珠</p>                                              | <p>Contact resistance 接触电阻: <math>100\text{ m}\Omega</math> Max.</p> <p>Insulation resistance 绝缘电阻: <math>100\text{ M}\Omega</math> Min.</p> <p>There shall be no defects in appearance or in the mechanical functions . (无论是在外观上还是在机械功能上, 都不得有任何缺陷)</p> |
| 12 | Heat Resistance 耐热              | <p>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 30 minute before measurements are made: 样品按下列条件进行耐热试验, 试验后在正常温度和湿度条件下放置 30 分钟后测定</p> <p>(1) Temperature 温度: <math>80 \pm 2^{\circ}\text{C}</math></p> <p>(2) Time时间: 96 hours</p>                                                                                        | <p>Contact resistance 接触电阻: <math>100\text{ m}\Omega</math> Max.</p> <p>Insulation resistance 绝缘电阻: <math>100\text{ M}\Omega</math> Min.</p> <p>There shall be no defects in appearance or in the mechanical functions . (无论是在外观上还是在机械功能上, 都不得有任何缺陷)</p> |

|                                                                                   |              |             |             |           |
|-----------------------------------------------------------------------------------|--------------|-------------|-------------|-----------|
|  | Doc. No.     | DM-A0162-10 | Page No.    | 6/7       |
|                                                                                   | Date Issued  | 2020-04-06  | Prepared by | Josephine |
|                                                                                   | Date revised | 2020-11-23  | checked by  | Jay       |
| <b>Product Specification</b>                                                      | Rev. No.     | 01          | Approved by | Mei Chen  |
| <b>Title:</b> MICRO SWITCH 微动开关                                                   |              |             |             |           |

|    |                                                               |                                                                                                                                                                                                             |                                                                                                            |
|----|---------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| 13 | <b>XKB Connectivity</b><br><br><b>Salt Spray Test</b><br>盐雾试验 | <b>The salt spray test shall be conducted at the following conditions :</b> 样品按下列条件进行盐雾试验<br><b>(1) Density (浓度):</b> 溶液 (5±1)% NaCl (质量百分比)<br><b>(2) Temperature 温度:</b> 35±2℃<br><b>Time时间:</b> 48 hours | <b>Appearance shall no rust, oxidation, corrosion and other undesirable phenomena.</b> (外观须无生锈、氧化、腐蚀等不良现象) |
|----|---------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|

## 9. SOLDERING AND CLEANING PROCESSES XKB CONNECTIVITY 焊接和清洗：

9.1. Keep all switch contacts in their "OFF" position for all operations.


在所有操作过程中，请确保开关在 OFF 位置

9.2. Wave soldering ( 波峰焊 ) : DIP Suggestions solder temperature at 260℃ (500°F) max.5 seconds . DIP 型推荐焊接焊锡温度为 260℃ ( 500°F) 最多 5 秒

9.3. Hand soldering ( 手焊 ) : Use a soldering iron of 30 watts controlled at 350℃ approximately 5 seconds. while applying solder.

使用 30W 烙铁控制温度在 350℃,焊接时长约 5 秒

9.4. Reflow soldering profile( 回炉焊 ):When the maximum temperature of the reflow furnace is 260 °C and the temperature is 260 °c. 10 seconds MAX. (reference) SMT 型回焊炉最高温度为 260℃，温度为 260℃时，最长时间不超过 10 秒 ( 如图 )

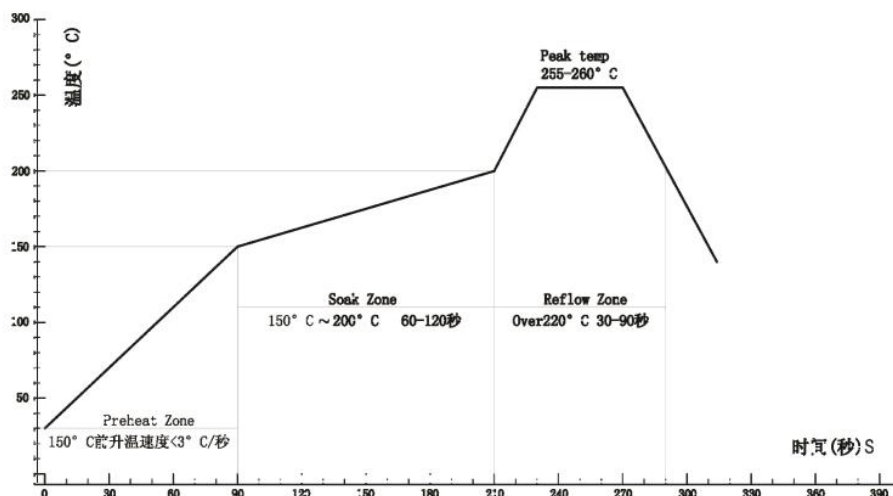

## 10. PACKAGING 包装

Please refer to the packing drawing. 请参考产品包装图纸

|                                                                                   |              |             |             |           |
|-----------------------------------------------------------------------------------|--------------|-------------|-------------|-----------|
|  | Doc. No.     | DM-A0162-10 | Page No.    | 7/7       |
|                                                                                   | Date Issued  | 2020-04-06  | Prepared by | Josephine |
|                                                                                   | Date revised | 2020-11-23  | checked by  | Jay       |
| <b>Product Specification</b>                                                      | Rev. No.     | 01          | Approved by | Mei Chen  |
| <b>Title:</b> MICRO SWITCH 微动开关                                                   |              |             |             |           |

| Rev. | Description | Date revised | Created/<br>Revised by |
|------|-------------|--------------|------------------------|
| 01   | New Release | 2021/04/30   | Josephine Lin          |
|      |             |              |                        |
|      |             |              |                        |
|      |             |              |                        |
|      |             |              |                        |