


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

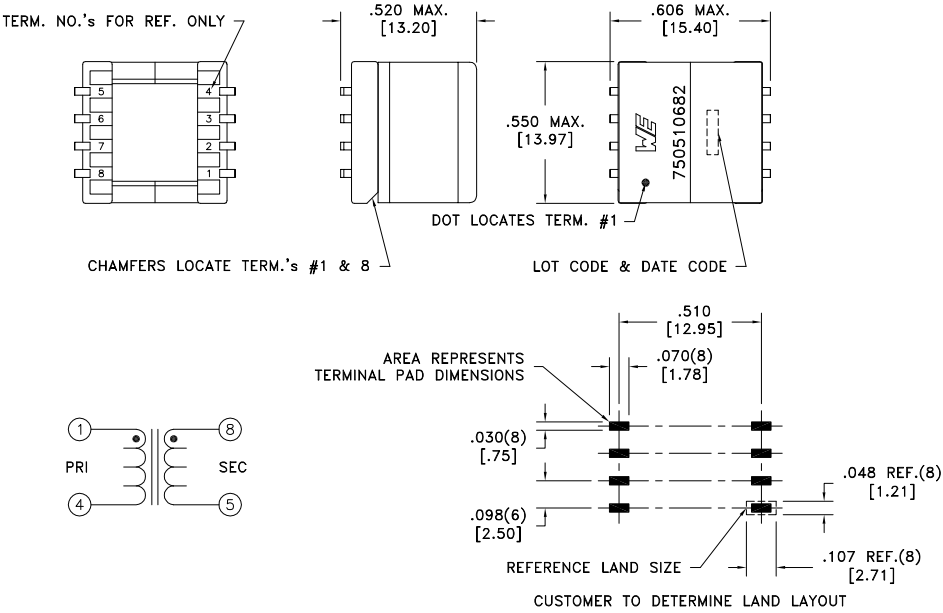

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:


PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4	@20°C	0.200 ohms max.
D.C. RESISTANCE	8-5	@20°C	0.200 ohms max.
INDUCTANCE	1-4	100kHz, 1.0VAC, Ls	1.00mH ±30%
INDUCTANCE	1-4	100kHz, 1.0VAC, 15mADC, Ls	1.00mH ±30%
LEAKAGE INDUCTANCE	1-4	tie(5+8), 75kHz, 100mVAC, Ls	1.0uH max.
INTERWINDING CAPACITANCE	1-8	tie(1+4, 5+8), 75kHz, 1.0VAC, Cs	30pF max.
DIELECTRIC	1-8	2000VAC, 1 second	1500VAC, 1 minute
TURNS RATIO		(1-4):(8-5)	1:1, ±1%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -20°C to +80°C.

Safety standard undefined.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$	Decimals: $\pm .005$ [.13] Footprint: $\pm .005$ [.13]	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-1079 www.we-online.com/midcom		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		TRANSFORMER	750510682
6A	6/16	SEE REVISION SHEET FOR REVISION LEVEL		eiSos p/n: 750510682			SPECIFICATION SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[750510682](#)