


37318000430 - 373 Series

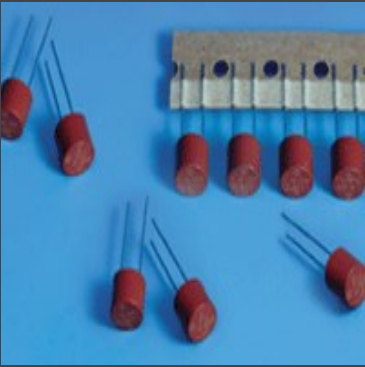

Series: 373

Fuse 373 Datasheet

The 373 Series are TR5®, sub-miniature, fast-acting type, 250V rated fuses, designed in accordance to UL 248- 14.

Features:

- Reduced PCB space requirements
- Direct solderable or plug-in versions
- Internationally approved
- Low internal resistance, Shocksafe casing
- Vibration resistant
- Halogen free
- CCCe for China import

Questions? [Contact Littelfuse Support](#)

Check Stock

Order Samples

Feedback

Electrical Characteristics Technical Resources Environmental Info

Property (Mouseover for details)	Value
Ampere Rating (A)	8
Nominal Melting I ² T (A ² sec)	30
Interrupting Rating	50A@250VAC
Min Operating Temp °C	-40
Max Operating Temp (°C)	85
Moisture Sensitivity Level	MIL-STD-202 Method 106
Nominal Power Dissipation (W)	1600
Nominal Voltage Drop (mV)	120
Nominal Cold Resistance (Ohms)	0.00736
Opening	Fast-Acting (F)
Package Size	TR5 (8.5x8mm)
VAC (V)	250

Connect with Littelfuse
Sign up to receive special offers and news

For more details about how we use your information, check our [Privacy Statement](#).

Mobile Site

- About Littelfuse**
- About Littelfuse
 - Conflict Free Statement
 - History
 - Investor Relations
 - Legal
 - Press Room
 - Privacy Statement
 - Supply Chain Transparency
 - Website Feedback

- Explore Littelfuse**
- Capabilities Brochures
 - Careers
 - Check Distributor Stock
 - Competitor Cross Reference
 - Industries
 - Order Samples
 - Products
 - Services

- Technical Resources**
- Application Designs
 - Education
 - FAQs
 - iDesign™
 - Littelfuse University
 - Product Catalogs
 - Quality Documents
 - Technical Documents