
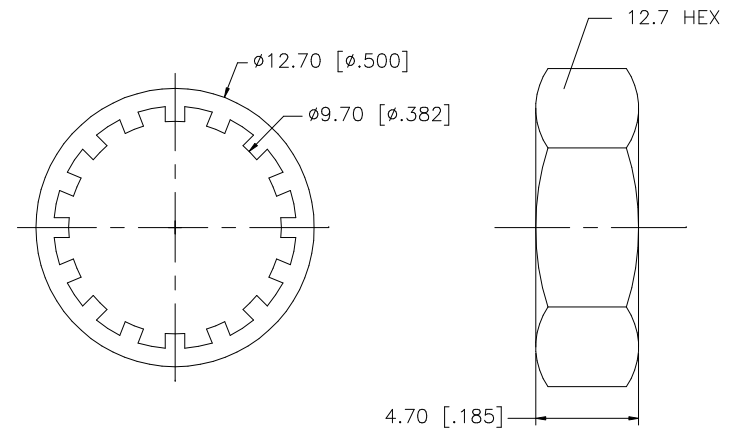
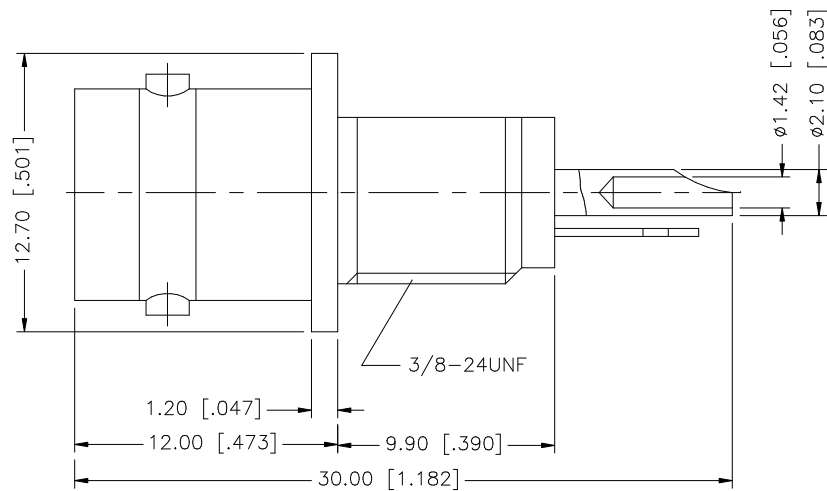


REV.	DATE	DESCRIPTION
A	11/19/03	UPDATE DRAWING FORMAT

RECOMMENDED
MOUNTING HOLE

NOTE:

1. MAX. PANEL THICKNESS = 3.2mm
2. RECOMMENDED TORQUE: A MAXIMUM 12 INCH-LBS MAY BE APPLIED ON HEX NUT WHEN MOUNTING CONNECTOR IN PANEL

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
8					DRAWN	G.R.S.	11/19/03									
7					CHECKED											
6									PART DESCRIPTION							
5	HEX NUT	BRASS	NICKEL		1				BNC BULKHEAD RECEPTACLE ISOLATED JACK – 50ohm							
4	LOCK WASHER	BRASS	NICKEL		1											
3	CONTACT PIN	PHOS. BRONZE	GOLD		1				PART NO.							
2	INSULATOR	TEFLON	NATURAL	1				112431								
1	BODY	BRASS	NICKEL	1												
DESCRIPTION		MATERIAL	FINISH	QTY	CAD FILE		C:/112/112431.DWG		DWG. NO.	112431.DWG	REV.	A	SIZE	A	SCALE	NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112431](#)