



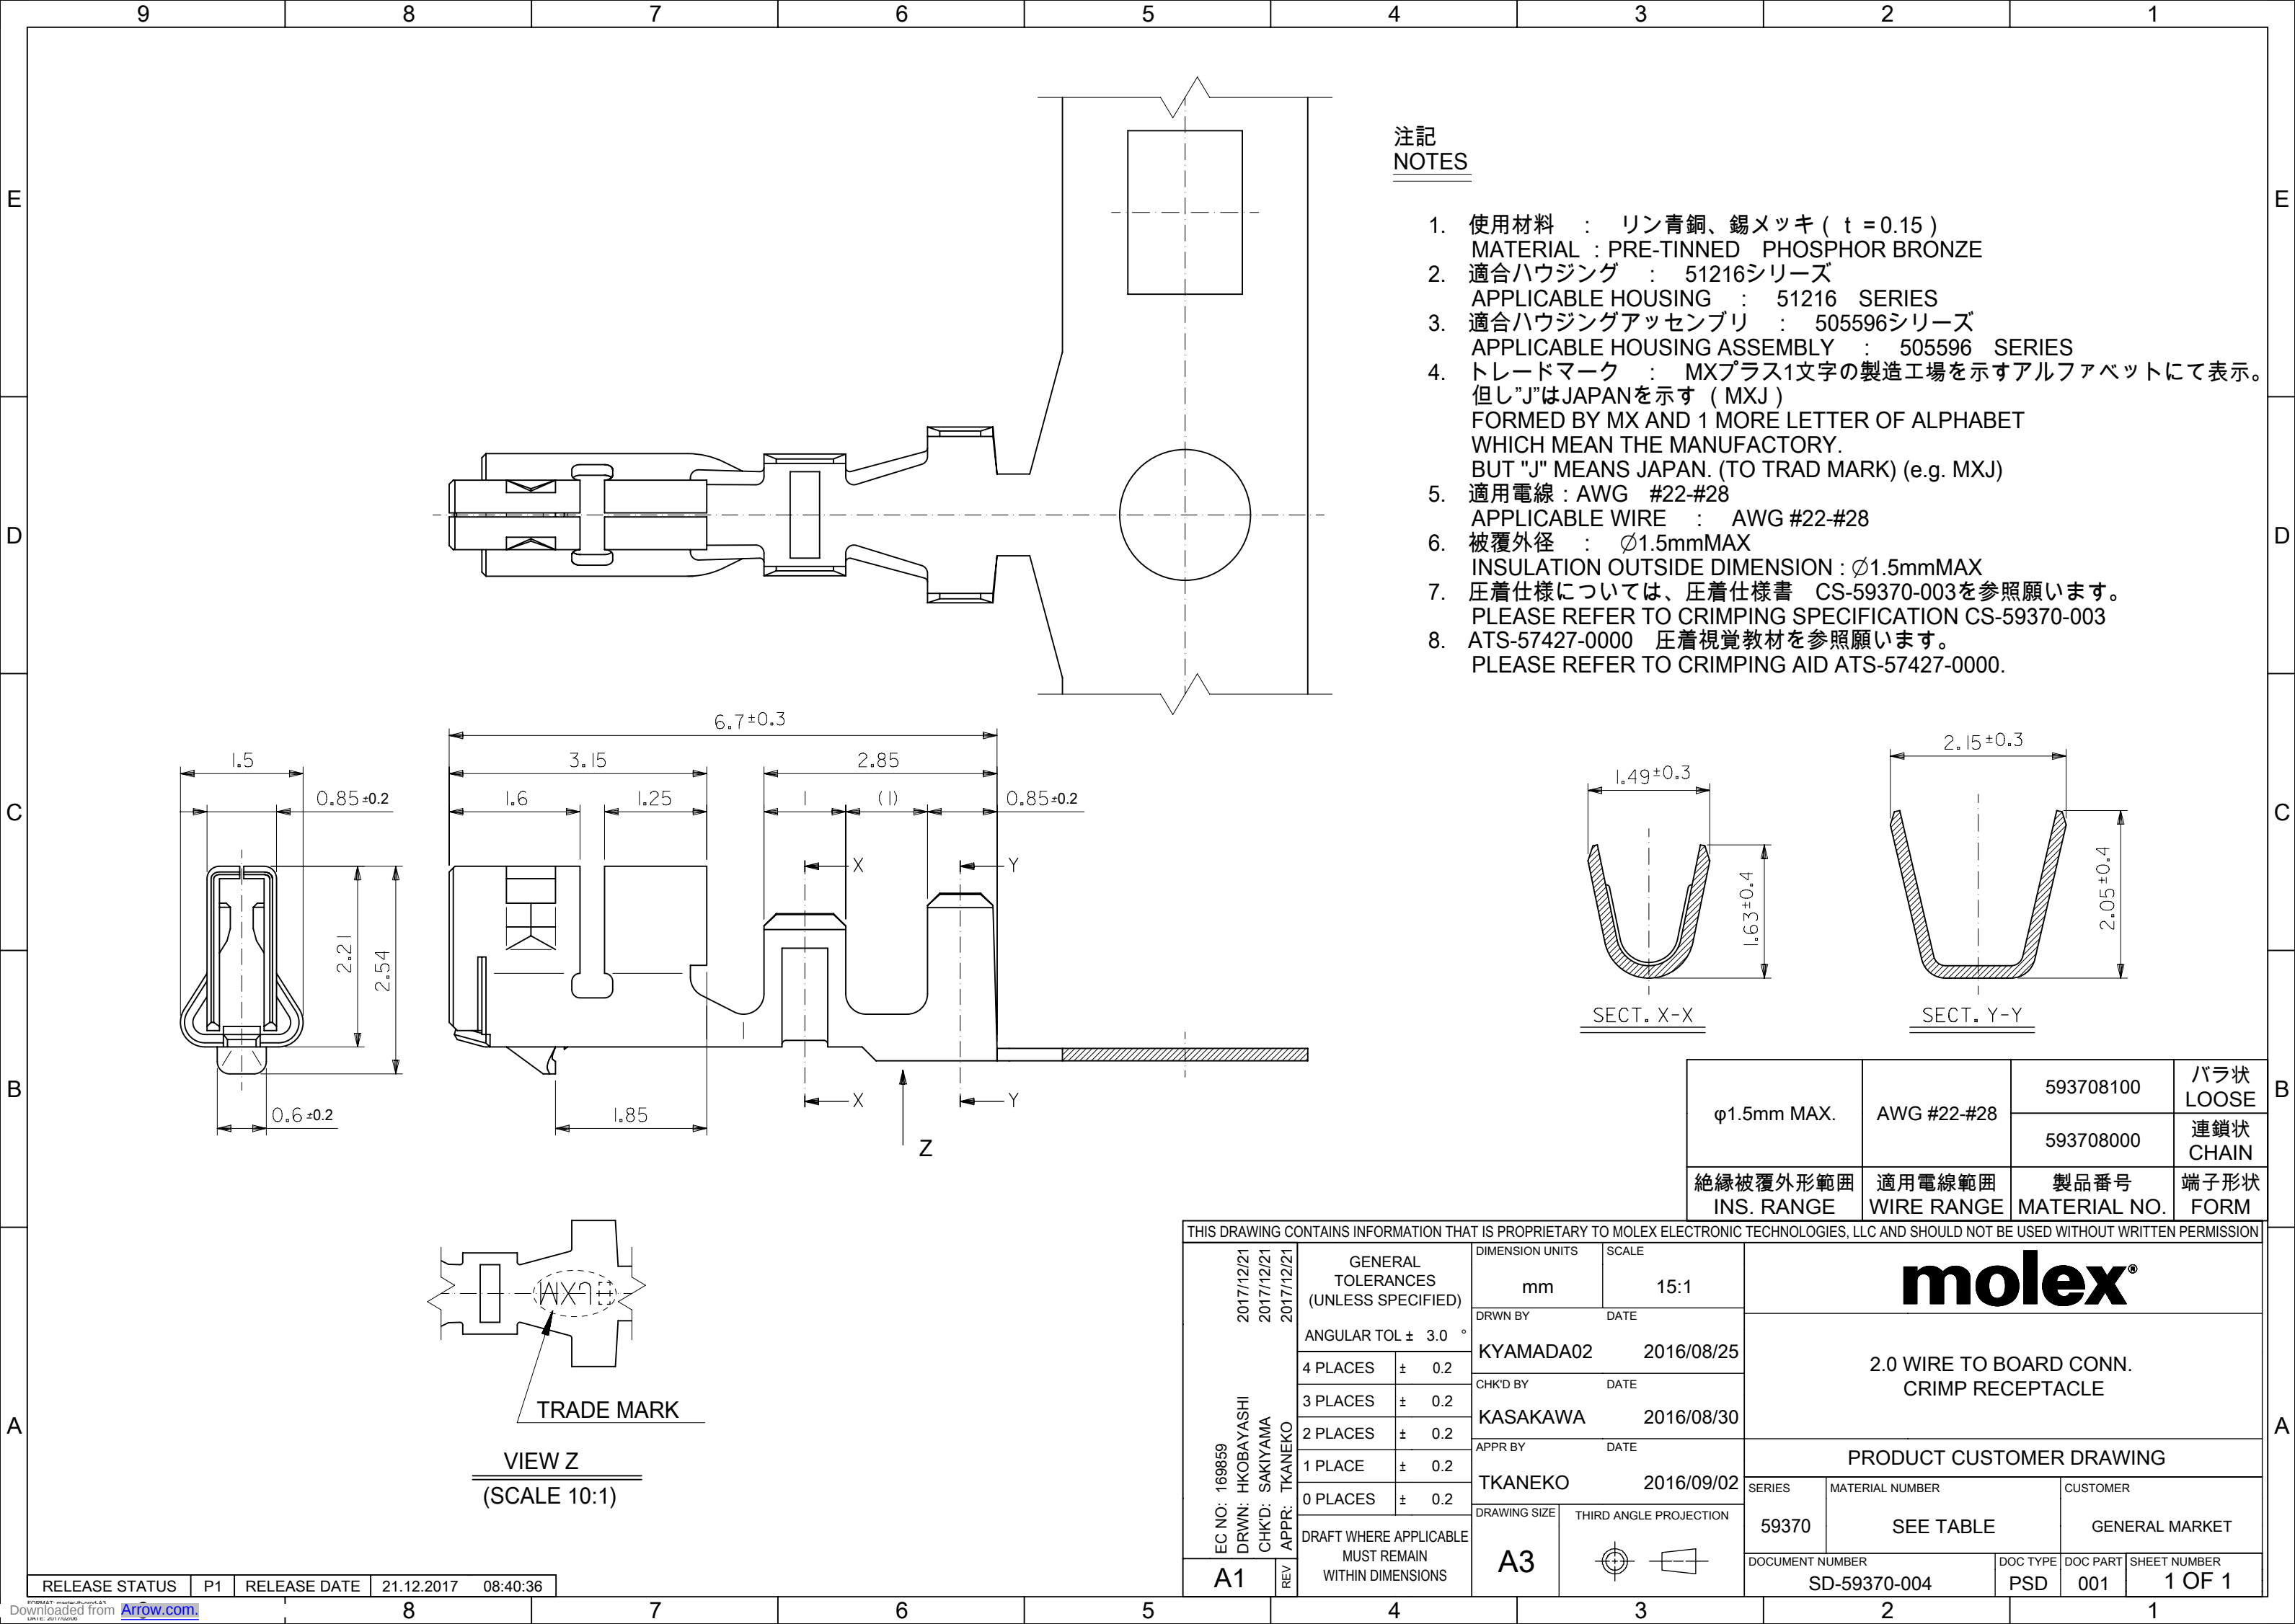

注記
NOTES

1. 使用材料 : リン青銅、錫メッキ (t = 0.15)
MATERIAL : PRE-TINNED PHOSPHOR BRONZE
2. 適合ハウジング : 51216シリーズ
APPLICABLE HOUSING : 51216 SERIES
3. 適合ハウジングアッセンブリ : 505596シリーズ
APPLICABLE HOUSING ASSEMBLY : 505596 SERIES
4. トレードマーク : MXプラス1文字の製造工場を示すアルファベットにて表示。
但し"J"はJAPANを示す (MXJ)
FORMED BY MX AND 1 MORE LETTER OF ALPHABET WHICH MEAN THE MANUFACTORY.
BUT "J" MEANS JAPAN. (TO TRAD MARK) (e.g. MXJ)
5. 適用電線 : AWG #22-#28
APPLICABLE WIRE : AWG #22-#28
6. 被覆外径 : $\phi 1.5\text{mm MAX}$
INSULATION OUTSIDE DIMENSION : $\phi 1.5\text{mm MAX}$
7. 圧着仕様については、圧着仕様書 CS-59370-003を参照願います。
PLEASE REFER TO CRIMPING SPECIFICATION CS-59370-003
8. ATS-57427-0000 圧着視覚教材を参照願います。
PLEASE REFER TO CRIMPING AID ATS-57427-0000.

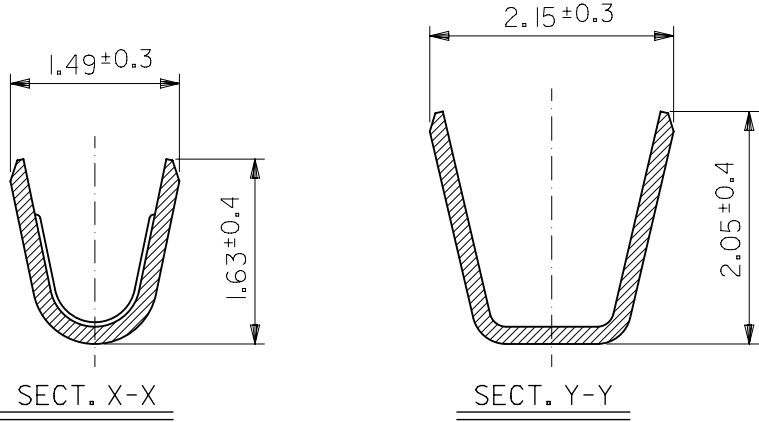

$\phi 1.5\text{mm MAX.}$	AWG #22-#28	593708100	バラ状 LOOSE
		593708000	連鎖状 CHAIN
絶縁被覆外形範囲 INS. RANGE	適用電線範囲 WIRE RANGE	製品番号 MATERIAL NO.	端子形状 FORM

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
EC NO: 169859 DRWN: HKOBAYASHI CHK'D: SAKIYAMA APPR: TKANEKO	2017/12/21 2017/12/21 2017/12/21	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS		SCALE		molex® 2.0 WIRE TO BOARD CONN. CRIMP RECEPTACLE							
			mm		15:1									
			ANGULAR TOL ± 3.0 °		DRWN BY		DATE		PRODUCT CUSTOMER DRAWING					
			4 PLACES ± 0.2		KYAMADA02		2016/08/25							
			3 PLACES ± 0.2		CHK'D BY		DATE							
			2 PLACES ± 0.2		KASAKAWA		2016/08/30							
			1 PLACE ± 0.2		APPR BY		DATE							
	0 PLACES ± 0.2		TKANEKO		2016/09/02									
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES		MATERIAL NUMBER		CUSTOMER			
			A3				59370		SEE TABLE		GENERAL MARKET			
					DOCUMENT NUMBER		DOC TYPE		DOC PART					
A1	REV						SD-59370-004		PSD		001			
										SHEET NUMBER				
										1 OF 1				