





SECTION A-A

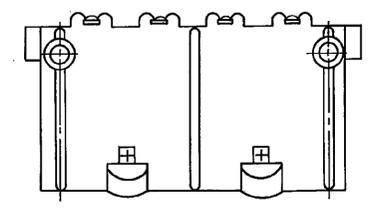

SECTION B-B
SCALE 10:1

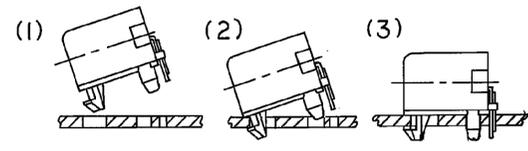

MOUNTING PROCEDURE

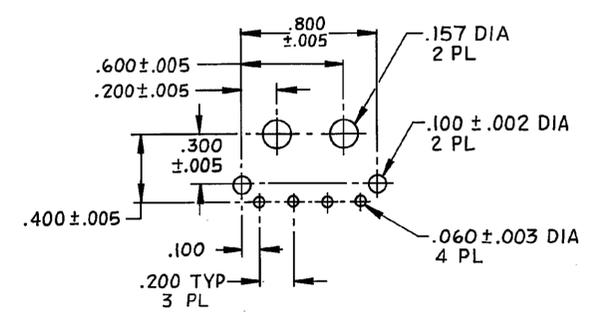

RECOMMENDED LAYOUT
FOR .062 THK P.C. BOARD
SCALE 2-1

- PARTS COMPLY WITH AMP SOLDERABILITY SPEC 109-II-3.
- RECOMMENDED EXPOSURE TO SOLDER WAVE (490°F) NOT TO EXCEED 5 SECONDS.
- MATERIAL - HOUSING: NYLON UL94V-2 (NATURAL). CONTACT: PHOS BRONZE (PRE-TIN).
- MATERIAL - HOUSING: NYLON UL94V-0 (WHITE). CONTACT: PHOS BRONZE (PRE-TIN).
- DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ± .015 ANGLES ± .015		CONTRACT NO DR <i>H. Sullivan 6-27-84</i> CHK <i>M. Jones 6-29-84</i> APPD <i>R. Glavin 6-29-84</i>		FINISH		MATERIAL		PART NO	
SEE TABLE		SEE TABLE		D		00779		1-641737-1 641737-1	
SEE TABLE		OTHER APPD		D		00779		641737	
				SCALE 4-1				SHEET	

△	△	1-641737-1
△	△	641737-1

STE TE Connectivity

NAME
P.C. HEADER, RIGHT ANGLE MOUNT,
COMMERCIAL MATE-N-LOK, 4 CKT

SIZE
D

FSCM NO
00779

DRAWING NO
641737

CUSTOMER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-641737-1](#)