
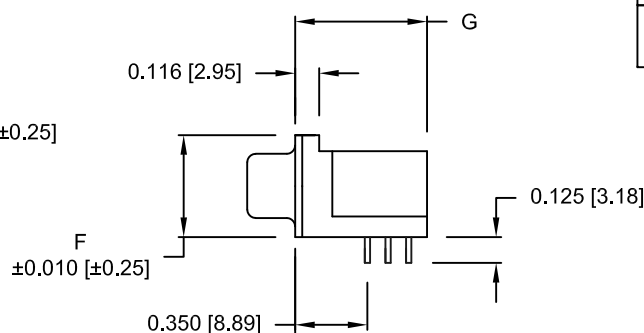


DESCRIPTION: HIGH DENSITY - MALE - RIGHT ANGLE

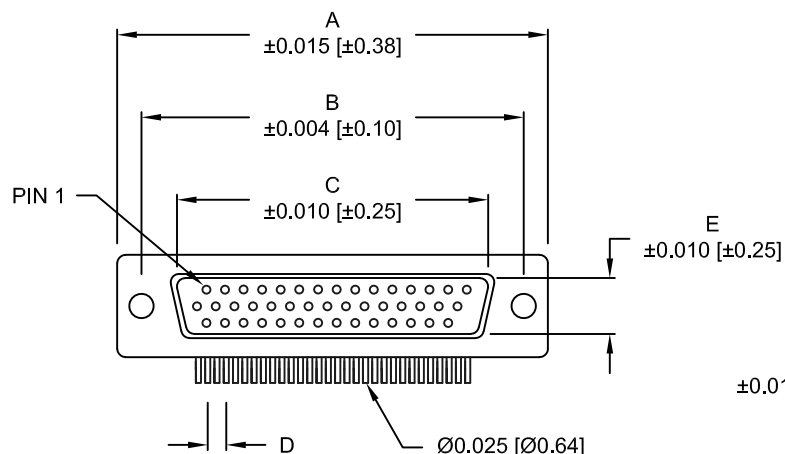

DIMENSIONS (IN.)

No. OF PINS	A	B	C	D	E	F	G
15	1.213	0.984	0.666	0.090	0.329	0.496	0.639
	30.80	24.99	16.92	2.29	8.36	12.60	16.23
26	1.543	1.312	0.994	0.090	0.329	0.496	0.639
	39.19	33.32	25.25	2.29	8.36	12.60	16.23
44	2.087	1.852	1.534	0.090	0.329	0.496	0.639
	53.00	47.04	38.96	2.29	8.36	12.60	16.23
62	2.732	2.500	2.156	0.095	0.329	0.496	0.639
	69.30	63.50	54.76	2.41	8.36	12.60	16.23

ELECTRICAL:

CURRENT RATING: 3 AMPS
CONTACT RESISTANCE: 15 MilliOhms Max.
INSULATION RESISTANCE: 1,000 MEGOhms Min. at 500 VDC
DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC FOR 1 MINUTE
WORKING VOLTAGE: 250 VAC
TEMPERATURE: -55°C TO +105°C

MATERIALS:

SHELL: SPCC, NICKEL PLATED
INSULATOR: PA9T-BLACK (UL94-0)
CONTACT: BRASS, GOLD ENTIRE CONTACT
RIVET: COPPER ALLOY, NICKEL PLATED
BOARDLOCK: SPCC, TIN PLATED
SCREWLOCK: ZINC ALLOY, NICKEL PLATED

181-YYY-1 1 3 R YY 1

SERIES _____
POSITIONS _____
015 _____
026 _____
044 _____
062 _____
GENDER _____
1 = MALE
TERMINATION _____
1 = DIP SOLDER
SHELL PLATING _____
3 = NICKEL PLATED
RoHS COMPLIANT _____
(HIGH TEMP. PROCESS)
HARDWARE OPTIONS _____
16 = $\varnothing$ 0.120 HOLE / INSIDE GND STRAPS
17 = 4-40 INSERTS / INSIDE GND STRAPS
18 = 4-40 SCREWLOCKS / INSIDE GND STRAPS
43 = $\varnothing$ 0.120 HOLE / METAL SHELL
45 = 4-40 INSERTS / METAL SHELL
48 = 4-40 SCREWLOCKS / METAL SHELL
53 = 4-40 INSERTS / BOARDLOCKS
55 = $\varnothing$ 0.120 HOLE / BOARDLOCKS
56 = 4-40 SCREWLOCKS / BOARDLOCKS
PLATING OPTIONS _____
1 = GOLD FLASH

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

PAM JENKINS

DATE:

03-17-05

RoHS COMPLIANT

NorComp

SCALE:

NTS

SHEET

OF

1


3

REV


15

DWG NO.


181-YYY-113RYY1

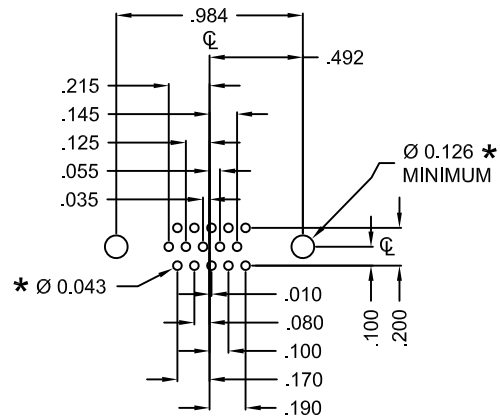


15 POSITION

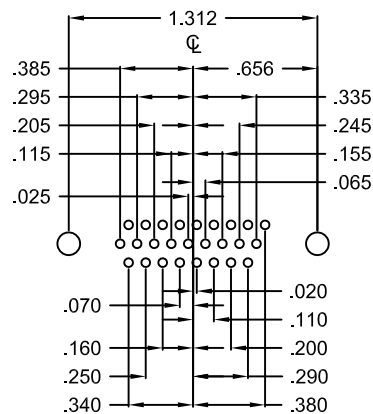

26 POSITION

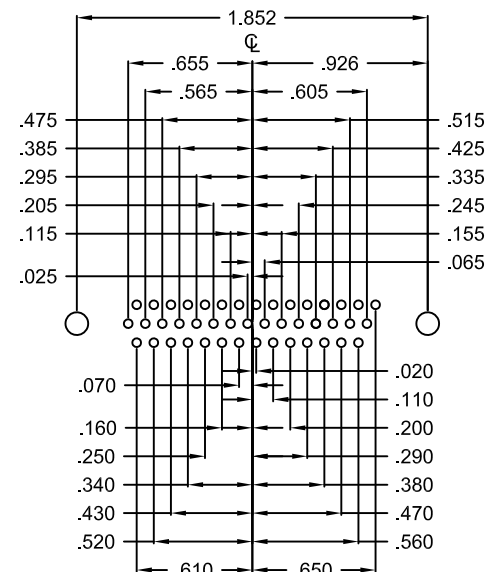

44 POSITION

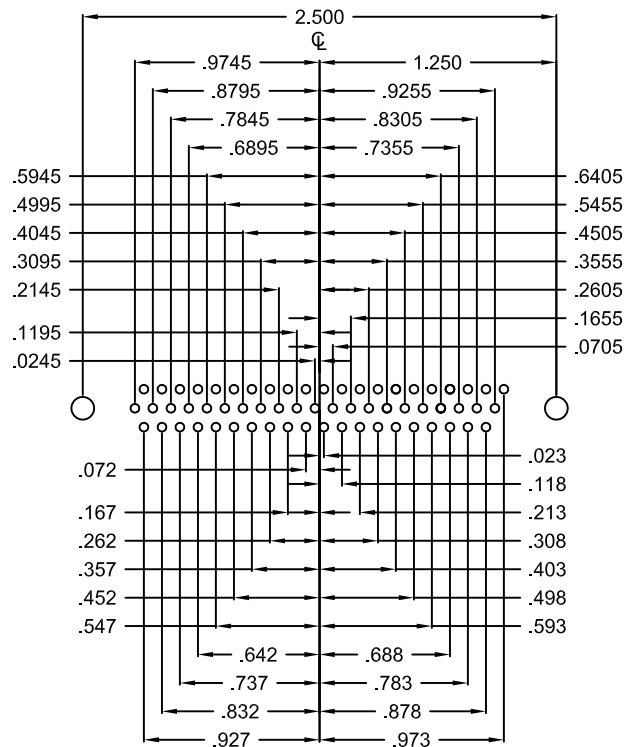

62 POSITION

HOLE PATTERN SHOWN
ARE FOR MALE

UNITS = inch

* TYP.
SUGGESTED SIZE
MAY NOT BE SUITABLE FOR ALL APPLICATIONS







DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS		DATE: 03-17-05	
SCALE: NTS		SHEET 2 OF 3	
DWG NO. 181-YYY-113RYY1		REV 15	

NorComp

	 0.141 ±0.020 METAL SHELL WITH INSIDE GROUND STRAPS	 METAL SHELL	 METAL SHELL FORK BOARD LOCKS
 .120" DIA. HOLE	16	43	55
 4-40 FLUSH INSERT	17	45	53
 4-40 HEX STANDOFF* FEMALE SCREWLOCK	18	48	56

*4.80mm Reference Hex Height

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
PAM JENKINS

DATE:
03-17-05

NorComp

SCALE: NTS	SHEET 3	OF 3	REV 15
DWG NO. 181-YYY-113RYY1			

RoHS COMPLIANT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[181-015-113R171](#) [181-026-113R171](#) [181-044-113R171](#) [181-062-113R171](#) [181-015-113R551](#) [181-015-113R531](#)
[181-026-113R531](#) [181-026-113R561](#) [181-044-113R561](#) [181-062-113R531](#) [181-062-113R561](#) [181-026-113R181](#)