

1                      2                      3                      4                      5                      6                      7

A

A

B

B

C

C

D




D

E



E

F

F

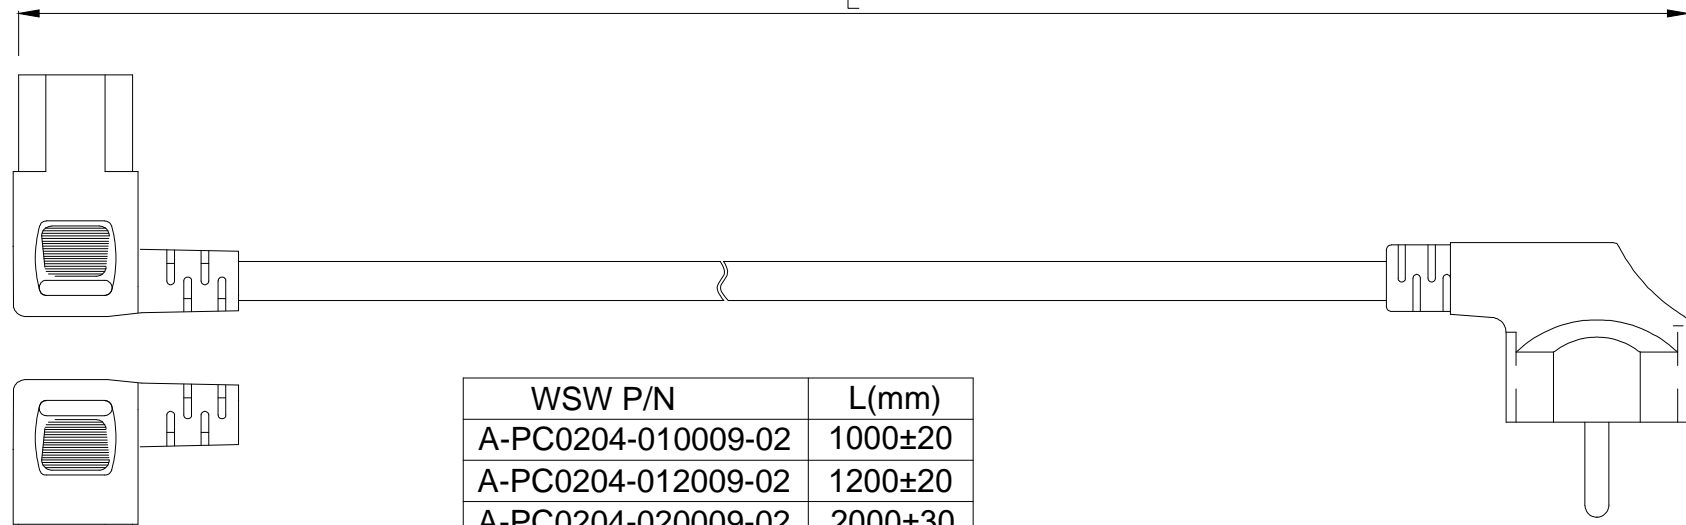

WSW P/N	L(mm)
A-PC0204-010009-02	1000±20
A-PC0204-012009-02	1200±20
A-PC0204-020009-02	2000±30
A-PC0204-030009-02	3000±40
A-PC0204-035009-02	3500±50
A-PC0204-050009-02	5000±75
A-PC0204-100009-02	10000±200

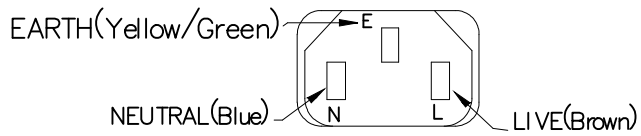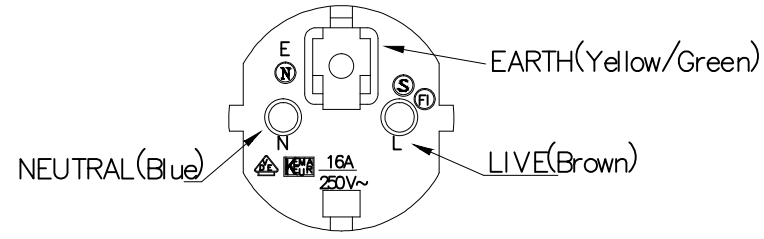

IEC 60320-1 C13

**NOTES:**

Cable Type:

1.H05VV-F 3Cx0.75mm<sup>2</sup>.

2.Jacket Color: Black.

IEC 60884-1 CEE7-VII ①



**Electrical Test:**

1.100% Open & Short Testing.

G

G

**RoHS compliant**  
Unit: mm

Scale	Free				Date	Name	Description: Power Cord	
TOLERANCE					Drawn	23.07.2024	Luca	ASSMANN WSW-No. <b>A-PC0204-0xxx09-02</b>
					Approved	26.11.2024	Luca	
DIM	TOL	①	Updated front view of plug	26.11.2024	Luca	 A company of 		
		②	Drawn	23.07.2024	Luca			
Angle	TOL	Id.	Modification	Date	Name			

Drawing-No.  
**ASS 11052 CA** rev01

Customer-No.                      Sheet

H

H

1                      2                      3                      4                      5                      6                      7