
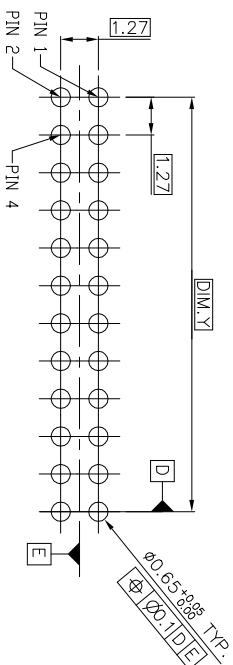



NOTES:
1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94-V0 BLACK.
TERMINAL: COPPER ALLOY
2.THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER OR VAPOR PHASE REFLOW OVEN.
3.THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
4.PRODUCT SPEC: GS-12-629
5.PACKAGE SPEC: GS-14-1420



SCALE 5.000

9

20021111-XXXX2XXLF	2 X 12	15.24	13.97
20021111-XXXX26XXLF	2 X 13	16.51	15.24
20021111-XXXX28XXLF	2 X 14	17.78	16.51
20021111-XXXX30XXLF	2 X 15	19.05	17.78
20021111-XXXX32XXLF	2 X 16	20.32	19.05
20021111-XXXX34XXLF	2 X 17	21.59	20.32
20021111-XXXX36XXLF	2 X 18	22.86	21.59
20021111-XXXX38XXLF	2 X 19	24.13	22.86
20021111-XXXX40XXLF	2 X 20	25.40	24.13
20021111-XXXX42XXLF	2 X 21	26.67	25.40
20021111-XXXX44XXLF	2 X 22	27.94	26.67
20021111-XXXX46XXLF	2 X 23	29.21	27.94
20021111-XXXX48XXLF	2 X 24	30.48	29.21
20021111-XXXX50XXLF	2 X 25	31.75	30.48
20021111-XXXX52XXLF	2 X 26	33.02	31.75
20021111-XXXX54XXLF	2 X 27	34.29	33.02
20021111-XXXX56XXLF	2 X 28	35.56	34.29
20021111-XXXX58XXLF	2 X 29	36.83	35.56
20021111-XXXX60XXLF	2 X 30	38.10	36.83
20021111-XXXX62XXLF	2 X 31	39.37	38.10
20021111-XXXX64XXLF	2 X 32	40.64	39.37
20021111-XXXX66XXLF	2 X 33	41.91	40.64
20021111-XXXX68XXLF	2 X 34	43.18	41.91
20021111-XXXX70XXLF	2 X 35	44.45	43.18
20021111-XXXX72XXLF	2 X 36	45.72	44.45
20021111-XXXX74XXLF	2 X 37	46.99	45.72
20021111-XXXX76XXLF	2 X 38	48.26	46.99
20021111-XXXX78XXLF	2 X 39	49.53	48.26
20021111-XXXX80XXLF	2 X 40	50.80	49.53
20021111-XXXX82XXLF	2 X 41	52.07	50.80
20021111-XXXX84XXLF	2 X 42	53.34	52.07
20021111-XXXX86XXLF	2 X 43	54.61	53.34
20021111-XXXX88XXLF	2 X 44	55.88	54.61
20021111-XXXX90XXLF	2 X 45	57.15	55.88

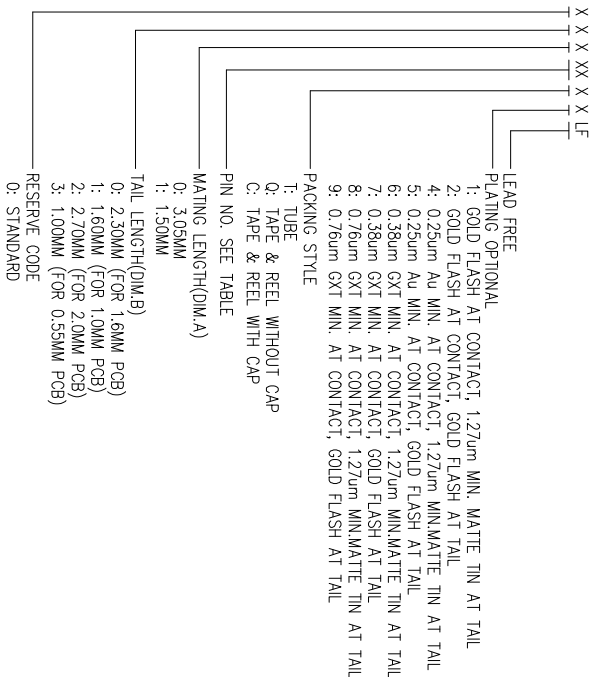[illegible]