CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn100%	Yes	Yes

6D 6E

more than you expect

WÜRTH ELEKTRONIK

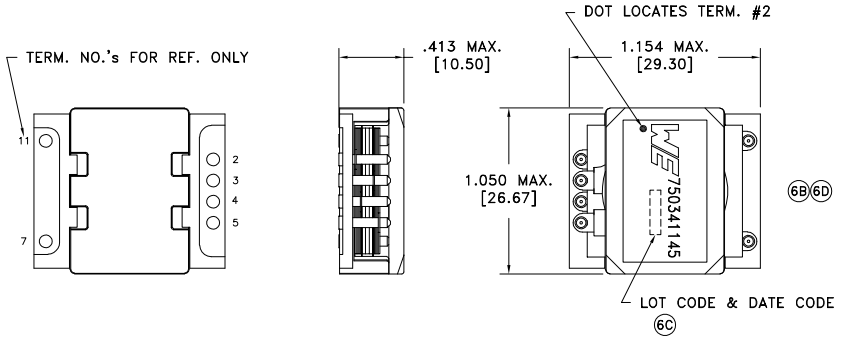



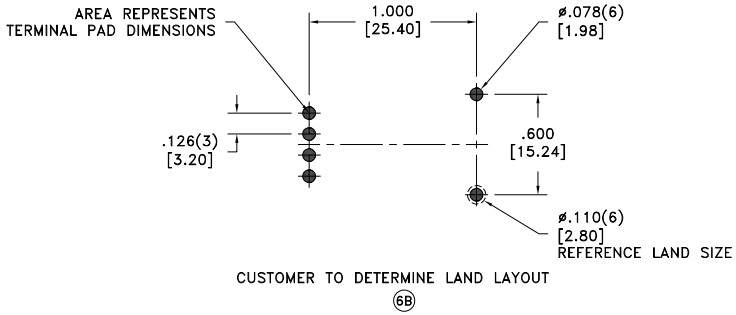

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

	PARAMETER		TEST CONDITIONS	VALUE
	D.C. RESISTANCE	2–4	@20°C	6.0 mOhms max.
	D.C. RESISTANCE	3–5	@20°C	6.0 mOhms max.
	D.C. RESISTANCE	7–11	@20°C	1.2 mOhms max.
6D	INDUCTANCE	2–5	tie(3+4), 100kHz, 100mVAC, Ls	410.0uH min.
	LEAKAGE INDUCTANCE	2–5	tie(3+4, 7+11), 100kHz, 100mVAC, Ls	1000nH max.
6D	DIELECTRIC	2–7	tie(3+4), 2250VDC, 1 second	–
	TURNS RATIO		(2–4):(7–11)	2.5:1, ±1%
	TURNS RATIO		(3–5):(7–11)	2.5:1, ±1%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: −40°C to +125°C including temp rise.

REV.	DATE
6E	12/19
6D	4/14
6C	11/12
6B	4/12

Packaging Specifications
Method: **Tape & Reel**
PKG-0793
www.we-online.com/midcom

CONVENTION PLACEMENT

SEE REVISION SHEET FOR REVISION LEVEL

Tolerances unless otherwise specified:
Angles: ±1° Decimals: ±.005 [.13]
Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750341145

compliant RoHS

PART NO.
750341145

SPECIFICATION SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Wurth Elektronik:

750341145