

[Find by Feature](#)
[Browse by Category](#)
[Share](#)
 [Search →](#)

Enter part number or keyword

[Search Results \(0\)](#)
[Search Options](#)

Select a product type to narrow your search:

Terminal ▾

Results with your selections: --

Blade size [mm] ▾

Terminal family ▾

Material ▾

Plating ▾

Gender ▾

Sealed ▾

Inside Ring Diameter [mm] ▾

Outside Ring Diameter [mm] ▾

Minimum Cable Core Cross Section [mm²] ▾


Maximum Cable Core Cross Section [mm²] ▾

Minimum Cable Diameter [mm] ▾

Maximum Cable Diameter [mm] ▾

[Clear](#)
[Search →](#)

Female CTS 150 Tin Plated Terminal, Cable Range 0.35 - 0.22 mm², Cable Insulation Range 1.40 - 1.10 mm
Part #15432208

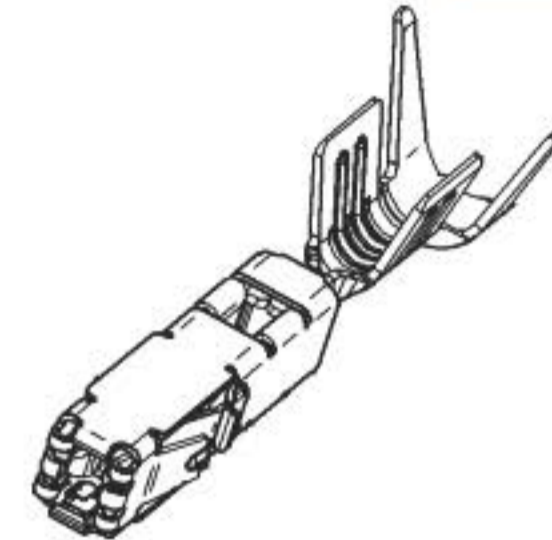

Question about this product?

[Attributes](#)
[Documents \(9\)](#)

Part #:	15432208
Description:	Female CTS 150 Tin Plated Terminal, Cable Range 0.35 - 0.22 mm ² , Cable Insulation Range 1.40 - 1.10 mm
Product Type:	Terminal
Status:	Active
Blade size [mm]:	1.5
Terminal family:	CTS
Series:	150
Gender:	Female
Sealed:	Sealed
Plating:	Tin
Minimum Cable Core Cross Section [mm²]:	0.22
Maximum Cable Core Cross Section [mm²]:	0.35
Minimum Cable Diameter [mm]:	1.10
Maximum Cable Diameter [mm]:	1.40
Typical cable seal:	15344778

Certain products listed on this website may be subject to restricted usage or distribution or may not be available. For additional information, please contact your local sales office.