


# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions

## Features:

- RMEF – standard power ratings
- RMEP – high power ratings
- Nickel barrier terminations standard
- Power derating from 100% at 70°C to zero at +155°C
- RoHS compliant, REACH compliant, lead free, and halogen free
- AEC-Q200 compliant



## Electrical Specifications - RMEF

| Type/Code | Power Rating (W) @ 70°C | Max. Working Voltage (V) | Max. Overload Voltage (V) | Max. Jumper Current (A) | TCR (ppm/°C) | Ohmic Range (Ω) and Tolerance <sup>(1)</sup> |
|-----------|-------------------------|--------------------------|---------------------------|-------------------------|--------------|--|
|           |                         |                          |                           |                         |              | 1%, 5%                                       |
| RMEF0402  | 0.063                   | 50                       | 100                       | 1                       | ± 400        | 1 - 9.76                                     |
|           |                         |                          |                           |                         |              | ± 100  |
| RMEF0603  | 0.1                     | 75                       | 150                       | 1                       | ± 100        | 1 - 10M                                      |
| RMEF0805  | 0.125                   | 150                      | 300                       | 2                       | ± 100        | 1 - 10M                                      |
| RMEF1206  | 0.25                    | 200                      | 400                       | 2                       | ± 100        | 1 - 10M                                      |
| RMEF1210  | 0.5                     | 200                      | 400                       | 3                       | ± 100        | 1 - 10M                                      |
| RMEF1812  | 0.75                    | 200                      | 400                       | 3                       | ± 100        | 1 - 10M                                      |
| RMEF2010  | 0.75                    | 200                      | 400                       | 3                       | ± 100        | 1 - 10M                                      |
| RMEF2512  | 1                       | 200                      | 400                       | 3                       | ± 100        | 1 - 10M                                      |

(1) Tighter tolerances available. Contact Stackpole Electronics.

Operating temperature range is -55 to +155°C

## Electrical Specifications - RMEP

| Type/Code | Power Rating (W) @ 70°C | Max. Working Voltage (V) | Max. Overload Voltage (V) | TCR (ppm/°C) | Ohmic Range (Ω) and Tolerance |             |
|-----------|-------------------------|--------------------------|---------------------------|--------------|-------------------------------|-------------|
|           |                         |                          |                           |              | 0.1%, 0.5%                    | 1%, 5%, 10% |
| RMEP0402  | 0.1                     | 50                       | 100                       | ± 400        | -                             | 1 - 9.76    |
|           |                         |                          |                           | ± 250        | 1 - 97.6K                     | 10 - 97.6K  |
|           |                         |                          |                           | ± 100        | 100K - 1M                     | 100K - 30M  |
| RMEP0603  | 0.125                   | 75                       | 150                       | ± 100        | -                             | 1 - 9.76    |
|           |                         |                          |                           | ± 250        | 1 - 97.6K                     | 10 - 97.6K  |
|           |                         |                          |                           | ± 100        | 100K - 1M                     | 100K - 30M  |
| RMEP0805  | 0.25                    | 150                      | 300                       | ± 100        | -                             | 1 - 9.76    |
|           |                         |                          |                           | ± 200        | 1 - 97.6K                     | 10 - 97.6K  |
|           |                         |                          |                           | ± 100        | 100K - 1M                     | 100K - 30M  |
| RMEP1206  | 0.5                     | 200                      | 400                       | ± 100        | -                             | 1 - 9.76    |
|           |                         |                          |                           | ± 200        | 1 - 97.6K                     | 10 - 97.6K  |
|           |                         |                          |                           | ± 100        | 100K - 1M                     | 100K - 30M  |
| RMEP1210  | 0.66                    | 200                      | 400                       | ± 100        | -                             | 1 - 9.76    |
|           |                         |                          |                           | ± 200        | 1 - 97.6K                     | 10 - 97.6K  |
|           |                         |                          |                           | ± 100        | 100K - 1M                     | 100K - 30M  |
| RMEP1812  | 1                       | 200                      | 400                       | ± 100        | -                             | 1 - 9.76    |
|           |                         |                          |                           | ± 200        | 1 - 97.6K                     | 10 - 97.6K  |
|           |                         |                          |                           | ± 100        | 100K - 1M                     | 100K - 10M  |
| RMEP2010  | 1                       | 200                      | 400                       | ± 100        | -                             | 1 - 9.76    |
|           |                         |                          |                           | ± 200        | 1 - 97.6K                     | 10 - 97.6K  |
|           |                         |                          |                           | ± 100        | 100K - 1M                     | 100K - 30M  |
| RMEP2512  | 2                       | 200                      | 400                       | ± 100        | -                             | 1 - 9.76    |
|           |                         |                          |                           | ± 200        | 1 - 97.6K                     | 10 - 97.6K  |
|           |                         |                          |                           | ± 100        | 100K - 1M                     | 100K - 30M  |

Operating temperature range is -55 to +155°C

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions


## Electrical Specifications - RMEF Jumper

| Type/Code | Max Overload Current (A)<br><1 second and 1 time | Jumper Resistance Value ( $\Omega$ ) |
|-----------|--|--------------------------------------|
| RMEF0402  | 3  | 0.05 Max.                            |
| RMEF0603  | 3  |                                      |
| RMEF0805  | 3  |                                      |
| RMEF1206  | 10   |                                      |
| RMEF1210  | 10   |                                      |
| RMEF2010  | 10   |                                      |
| RMEF2512  | 10   |                                      |

## Electrical Specifications - RMEP Jumper

| Type/Code | Max Overload Current (A)<br><1 second and 1 time | Jumper Rated Current (A) | Jumper Resistance Value ( $\Omega$ ) |
|-----------|--|--------------------------|--------------------------------------|
| RMEP0402  | 6  | 1.8                      | 0.02 Max.                            |
| RMEP0603  | 9  | 2.5                      |                                      |
| RMEP0805  | 13   | 3.5                      |                                      |
| RMEP1206  | 16   | 4.4                      |                                      |
| RMEP1210  | 19   | 5.2                      |                                      |
| RMEP1812  | 22   | 6                        |                                      |
| RMEP2010  | 22   | 6                        |                                      |
| RMEP2512  | 30   | 8                        |                                      |

## Mechanical Specifications - RMEF

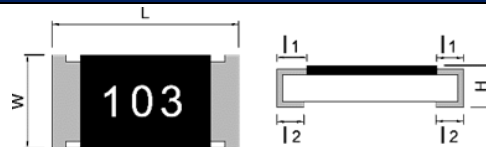


| Type/Code | L                  | W                  | H                  | $l_1$             | $l_2$             | Unit   |
|-----------|--------------------|--------------------|--------------------|-------------------|-------------------|--------|
| RMEF0402  | 0.039 $\pm$ 0.0039 | 0.020 $\pm$ 0.0020 | 0.012 $\pm$ 0.0020 | 0.006 $\pm$ 0.004 | 0.008 $\pm$ 0.004 | inches |
|           | 1.00 $\pm$ 0.10    | 0.50 $\pm$ 0.05    | 0.30 $\pm$ 0.05    | 0.15 $\pm$ 0.10   | 0.20 $\pm$ 0.10   | mm     |
| RMEF0603  | 0.063 $\pm$ 0.008  | 0.031 $\pm$ 0.006  | 0.016 $\pm$ 0.004  | 0.012 $\pm$ 0.008 | 0.012 $\pm$ 0.004 | inches |
|           | 1.60 $\pm$ 0.20    | 0.80 $\pm$ 0.15    | 0.40 $\pm$ 0.10    | 0.30 $\pm$ 0.20   | 0.30 $\pm$ 0.10   | mm     |
| RMEF0805  | 0.079 $\pm$ 0.0079 | 0.049 $\pm$ 0.0059 | 0.020 $\pm$ 0.0059 | 0.012 $\pm$ 0.006 | 0.016 $\pm$ 0.006 | inches |
|           | 2.00 $\pm$ 0.20    | 1.25 $\pm$ 0.15    | 0.50 $\pm$ 0.15    | 0.30 $\pm$ 0.15   | 0.40 $\pm$ 0.15   | mm     |
| RMEF1206  | 0.120 $\pm$ 0.004  | 0.063 $\pm$ 0.008  | 0.022 $\pm$ 0.006  | 0.016 $\pm$ 0.008 | 0.020 $\pm$ 0.008 | inches |
|           | 3.05 $\pm$ 0.10    | 1.60 $\pm$ 0.20    | 0.55 $\pm$ 0.15    | 0.40 $\pm$ 0.20   | 0.50 $\pm$ 0.20   | mm     |
| RMEF1210  | 0.120 $\pm$ 0.0039 | 0.098 $\pm$ 0.0079 | 0.022 $\pm$ 0.0059 | 0.020 $\pm$ 0.008 | 0.020 $\pm$ 0.008 | inches |
|           | 3.05 $\pm$ 0.10    | 2.50 $\pm$ 0.20    | 0.55 $\pm$ 0.15    | 0.50 $\pm$ 0.20   | 0.50 $\pm$ 0.20   | mm     |
| RMEF1812  | 0.177 $\pm$ 0.004  | 0.122 $\pm$ 0.008  | 0.022 $\pm$ 0.002  | 0.022 $\pm$ 0.008 | 0.028 $\pm$ 0.008 | inches |
|           | 4.50 $\pm$ 0.10    | 3.10 $\pm$ 0.20    | 0.55 $\pm$ 0.05    | 0.55 $\pm$ 0.20   | 0.70 $\pm$ 0.20   | mm     |
| RMEF2010  | 0.197 $\pm$ 0.0079 | 0.098 $\pm$ 0.0079 | 0.022 $\pm$ 0.0039 | 0.024 $\pm$ 0.008 | 0.024 $\pm$ 0.008 | inches |
|           | 5.00 $\pm$ 0.20    | 2.50 $\pm$ 0.20    | 0.55 $\pm$ 0.10    | 0.60 $\pm$ 0.20   | 0.60 $\pm$ 0.20   | mm     |
| RMEF2512  | 0.248 $\pm$ 0.008  | 0.126 $\pm$ 0.008  | 0.022 $\pm$ 0.004  | 0.024 $\pm$ 0.008 | 0.024 $\pm$ 0.008 | inches |
|           | 6.30 $\pm$ 0.20    | 3.20 $\pm$ 0.20    | 0.55 $\pm$ 0.10    | 0.60 $\pm$ 0.20   | 0.60 $\pm$ 0.20   | mm     |

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions

## Mechanical Specifications - RMEP



| Type/Code | L             | W             | H             | l <sub>1</sub> | l <sub>2</sub> | Unit   |
|-----------|---------------|---------------|---------------|----------------|----------------|--------|
| RMEP0402  | 0.039 ± 0.002 | 0.020 ± 0.002 | 0.012 ± 0.002 | 0.006 ± 0.004  | 0.008 ± 0.004  | inches |
|           | 1.00 ± 0.05   | 0.50 ± 0.05   | 0.30 ± 0.05   | 0.15 ± 0.10    | 0.20 ± 0.10    | mm     |
| RMEP0603  | 0.063 ± 0.004 | 0.031 ± 0.004 | 0.016 ± 0.004 | 0.012 ± 0.008  | 0.012 ± 0.004  | inches |
|           | 1.60 ± 0.10   | 0.80 ± 0.10   | 0.40 ± 0.10   | 0.30 ± 0.20    | 0.30 ± 0.10    | mm     |
| RMEP0805  | 0.079 ± 0.004 | 0.049 ± 0.004 | 0.020 ± 0.006 | 0.012 ± 0.006  | 0.016 ± 0.006  | inches |
|           | 2.00 ± 0.10   | 1.25 ± 0.10   | 0.50 ± 0.15   | 0.30 ± 0.15    | 0.40 ± 0.15    | mm     |
| RMEP1206  | 0.120 ± 0.004 | 0.063 ± 0.004 | 0.022 ± 0.006 | 0.016 ± 0.008  | 0.020 ± 0.008  | inches |
|           | 3.05 ± 0.10   | 1.60 ± 0.10   | 0.55 ± 0.15   | 0.40 ± 0.20    | 0.50 ± 0.20    | mm     |
| RMEP1210  | 0.120 ± 0.004 | 0.098 ± 0.006 | 0.022 ± 0.006 | 0.020 ± 0.008  | 0.020 ± 0.008  | inches |
|           | 3.05 ± 0.10   | 2.50 ± 0.15   | 0.55 ± 0.15   | 0.50 ± 0.20    | 0.50 ± 0.20    | mm     |
| RMEP1812  | 0.177 ± 0.004 | 0.122 ± 0.006 | 0.022 ± 0.006 | 0.022 ± 0.008  | 0.028 ± 0.008  | inches |
|           | 4.50 ± 0.10   | 3.10 ± 0.15   | 0.55 ± 0.15   | 0.55 ± 0.20    | 0.70 ± 0.20    | mm     |
| RMEP2010  | 0.197 ± 0.004 | 0.098 ± 0.006 | 0.022 ± 0.006 | 0.024 ± 0.008  | 0.024 ± 0.008  | inches |
|           | 5.00 ± 0.10   | 2.50 ± 0.15   | 0.55 ± 0.15   | 0.60 ± 0.20    | 0.60 ± 0.20    | mm     |
| RMEP2512  | 0.248 ± 0.004 | 0.126 ± 0.006 | 0.026 ± 0.006 | 0.024 ± 0.012  | 0.024 ± 0.012  | inches |
|           | 6.30 ± 0.10   | 3.20 ± 0.15   | 0.65 ± 0.15   | 0.60 ± 0.30    | 0.60 ± 0.30    | mm     |

## Performance Characteristics

| Test  | Test Method                               | Procedure  | Requirements  |
|---|---|--|---|
| Temperature Coefficient of Resistance (TCR) | JIS-C-5201-1 4.8<br>IEC-60115-1 4.8       | At 25/-55°C and 25°C/+155°C, 25°C is the reference temperature   | As per specification  |
| RMEF Short Time Overload                    | JIS-C-5201-1 4.13<br>IEC-60115-1 4.13     | 2.5 times RCWV or Max. overload voltage whichever is less for 5 seconds.<br>Jumper: Overload current for 5 seconds<br>0402/0603/0805 = 2.5 A<br>1206/1210/1812/2010/2512 = 5 A | 1% and below: ± (1% + 0.05Ω)<br>5%: ± (2% + 0.1Ω)<br>RMEF Jumper: Max 0.05Ω after test<br>RMEP Jumper: Max 0.02Ω after test   |
| RMEP Short Time Overload                    |   | 2.5 times RCWV or Max. overload voltage whichever is less for 2 seconds.<br>Jumper: Overload current for 5 seconds<br>0402=13 A, 1812=15 A, 2010=15 A, 2512=20 A               |   |
| Leaching                                    | JIS-C-5201-1 4.18<br>IEC-60068-2-58 8.2.1 | 260 ± 5°C for 30 seconds   | Individual leaching area ≤ 5%<br>Total leaching area ≤ 10%  |
| Resistance to Soldering Heat                | JIS-C-5201-1 4.18<br>IEC-60115-1 4.18     | 260 ± 5°C for 10 seconds   | 1% and below: ± (0.5% + 0.05Ω)<br>5%: ± (1% + 0.05Ω)  |
| Rapid Change of Temperature                 | JIS-C-5201-1 4.19<br>IEC-60115-1 4.19     | -55 to +155°C, 5 cycles  | 1% and below: ± (0.5% + 0.05Ω)<br>RMEF 5%: ± (1% + 0.05Ω)<br>RMEP 5%: ± (1% + 0.1Ω)   |
| Resistance to Solvent                       | JIS-C-5201-1 4.29                         | The tested resistor is immersed into isopropyl alcohol of 20~25°C for 60 seconds.<br>Then the resistor is left in the room for 48 hours.                                       | All tolerances: ± (0.5% + 0.05Ω)<br>RMEF Jumper: Max. 0.05Ω after test<br>RMEP Jumper: Max. 0.02Ω after test                  |
| Damp Heat with Load                         | JIS-C-5201-1 4.24<br>IEC-60115-1 4.24     | 40 ± 2°C, 90~95% R.H. RCWV or Max working voltage whichever is less for 1000 hours with 1.5 hours "ON" and 0.5 hour "OFF".   | 1% and below: ± (1% + 0.05Ω)<br>5%: ± (2% + 0.05Ω)<br>RMEF Jumper: Max. 0.1Ω after test<br>RMEP Jumper: Max. 0.05Ω after test |

# RMEF / RMEP Series


General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions

## Performance Characteristics (cont.)

| Test                     | Test Method                             | Procedure   | Requirements  |
|--------------------------|---|---|---|
| Load Life (Endurance)    | JIS-C-5201-1 4.25<br>IEC-60115-1 4.25.1 | 70 ± 2°C, RCWV or Max working voltage<br>whichever is less for 1000 hours with 1.5 hours<br>"ON" and 0.5 hour "OFF" | 1% and below: ± (1% + 0.05Ω)<br>5%: ± (3% + 0.05Ω)<br>RMEF Jumper: Max. 0.1Ω after test<br>RMEP Jumper: Max. 0.05Ω after test |
| Insulation Resistance    | JIS-C-5201-1 4.6<br>IEC-60115-1 4.6     | Apply 100 VDC for 1 minute.   | ≥ 10GΩ  |
| RMEF<br>Bending Strength | JIS-C-5201-1 4.33<br>IEC-60115-1 4.33   | Bending once for 5 seconds<br>D: 0402, 0603, 0805 = 5 mm<br>1206, 1210, 1812 = 3 mm<br>2010, 2512 = 2 mm            | ± (1% + 0.05Ω)  |

### Power Derating Curve:

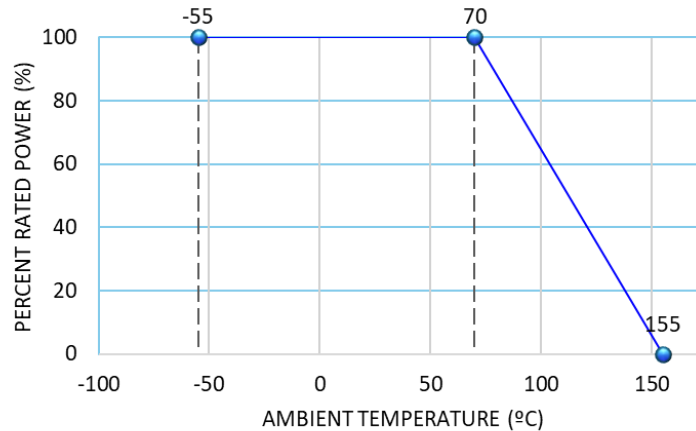

Power rating or current rating is in the case based on continuous full-load at ambient temperature of 70°C. For operation at ambient temperature in excess of 70°C, the load should be derated in accordance with figure of derating curve.

### Voltage Rating or Current Rating

Resistance range ≥ 1Ω

Rated Voltage: The resistor shall have a DC continuous working voltage of a RMS AC continuous working voltage at commercial line frequency and have form corresponding to the power rating, as determined formula as following:

$$E(RCWV) = \sqrt{P \times R}$$

E=Rated voltage (V)

P=Power rating (W)


R=Nominal resistance (Ω)

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption



Stackpole Electronics, Inc.  
Resistive Product Solutions

## Recommended Solder Pad



| Size | A             | B             | C             | Unit         |
|------|---------------|---------------|---------------|--------------|
| 0402 | 0.024<br>0.60 | 0.063<br>1.60 | 0.028<br>0.70 | inches<br>mm |
| 0603 | 0.031<br>0.80 | 0.094<br>2.40 | 0.039<br>1.00 | inches<br>mm |
| 0805 | 0.051<br>1.30 | 0.114<br>2.90 | 0.055<br>1.40 | inches<br>mm |
| 1206 | 0.087<br>2.20 | 0.165<br>4.20 | 0.067<br>1.70 | inches<br>mm |
| 1210 | 0.079<br>2.00 | 0.173<br>4.40 | 0.106<br>2.70 | inches<br>mm |
| 1812 | 0.122<br>3.11 | 0.233<br>5.91 | 0.118<br>3.00 | inches<br>mm |
| 2010 | 0.150<br>3.80 | 0.260<br>6.60 | 0.106<br>2.70 | inches<br>mm |
| 2512 | 0.193<br>4.90 | 0.319<br>8.10 | 0.134<br>3.40 | inches<br>mm |

## Recommended Resistor Reflow Profile

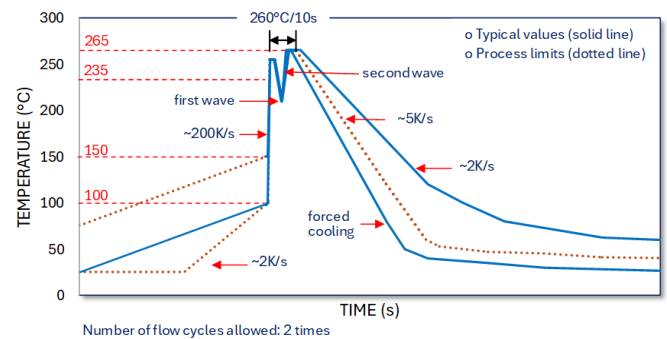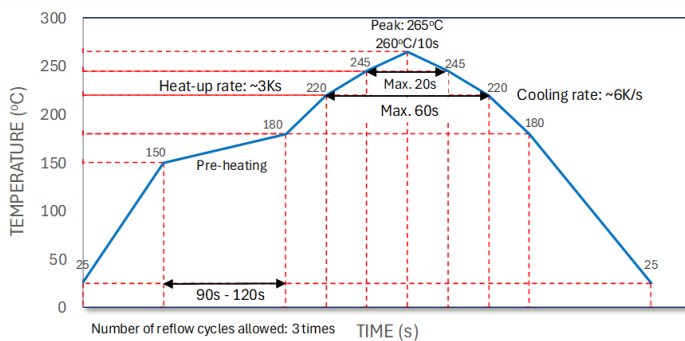

Rework temperature (hot air equipment): 350°C, 3~5 seconds

Recommended reflow methods: IR, vapor phase oven, hot air oven

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions

## Repetitive Pulse Information

(This information is for reference only and is not guaranteed performance.)


If repetitive pulses are applied to resistors, pulse wave form must be less than “Pulse Limiting Voltage”, “Pulse Limiting Current” or “Pulse Limiting Wattage” calculated by the formula below.

$$V_p = K\sqrt{P \times R \times T / t}$$

$$I_p = K\sqrt{P / R \times T / t}$$

$$P_p = K^2 \times P \times T / t$$

Where:  $V_p$ : Pulse limiting voltage (V)  
 $I_p$ : Pulse limiting current (A)  
 $P_p$ : Pulse limiting wattage (W)  
 $P$ : Power rating (W)  
 $R$ : Nominal resistance (ohm)  
 $T$ : Repetitive period (sec)  
 $t$ : Pulse duration (sec)  
 $K$ : Coefficient by resistors type (refer to below matrix)  
 $[V_r$ : Rated Voltage (V),  $I_r$ : Rated Current (A)]

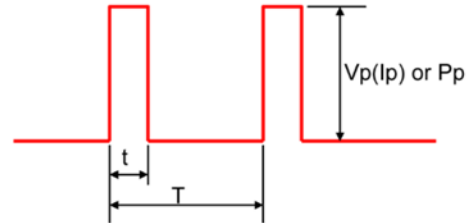


- Note 1: If  $T > 10 \rightarrow T = 10$  (sec),  $T/t > 1000 \rightarrow T/t = 1000$   
 Note 2: If  $T > 10$  and  $T/t > 1000$ , “Pulse Limiting power (Single pulse) is applied  
 Note 3: If  $V_p < V_r$  ( $I_p < I_r$  or  $P_p < P$ ),  $V_r$  ( $I_r$ ,  $P$ ) is  $V_p$  ( $I_p$ ,  $P_p$ )  
 Note 4: Pulse limiting voltage (current, wattage) is applied at less than rated ambient temperature. If ambient temperature is more than the rated temperature (70°C), please decrease power rating according to “Power Derating Curve”  
 Note 5: Please assure sufficient margin for use period and conditions for “Pulse Limiting Voltage”  
 Note 6: If the pulse waveform is not square wave, please judge after transform the waveform into square wave according to the “Waveform Transformation to Square Wave”.

## Coefficient (K) Matrix


| Ohmic Value                   | K    |
|-------------------------------|------|
| $R < 10\Omega$                | 0.50 |
| $10\Omega \leq R < 100\Omega$ | 0.45 |
| $100\Omega \leq R < 1K\Omega$ | 0.35 |
| $1K\Omega \leq R < 10K\Omega$ | 0.25 |
| $10K\Omega \leq R$            | 0.20 |

## Waveform Transformation to Square Wave


1. Discharge curve wave with time constant "t" → Square wave

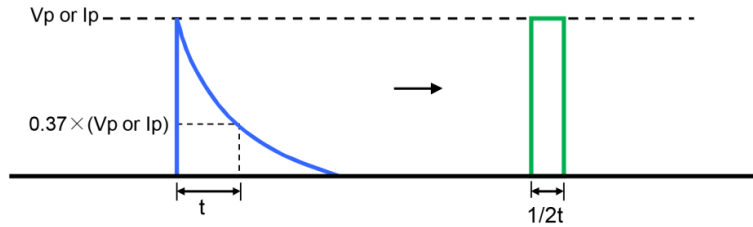


2. Damping oscillation wave with time constant of envelope "t" → Square wave

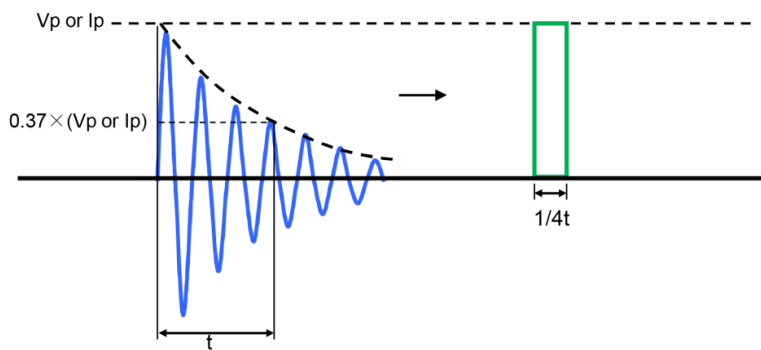


3. Half-wave rectification wave → Square wave

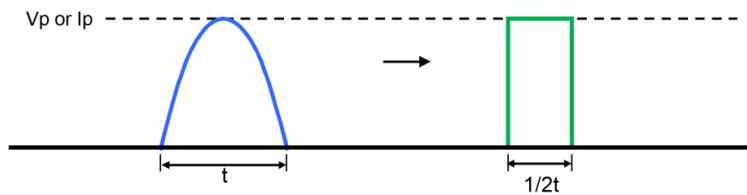

4. Triangular wave → Square wave

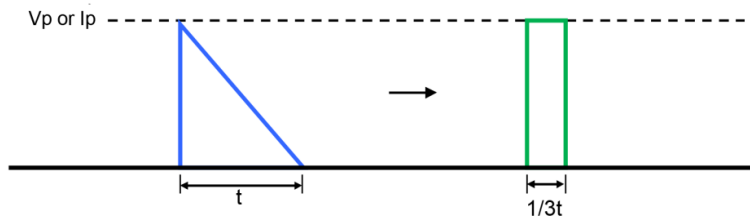

5. Special wave → Square wave

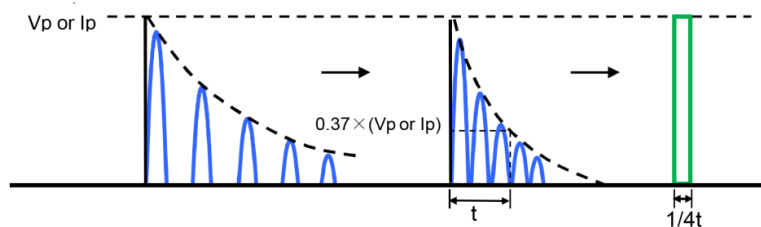


# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption


Stackpole Electronics, Inc.  
Resistive Product Solutions

## RMEF Single Pulse Power

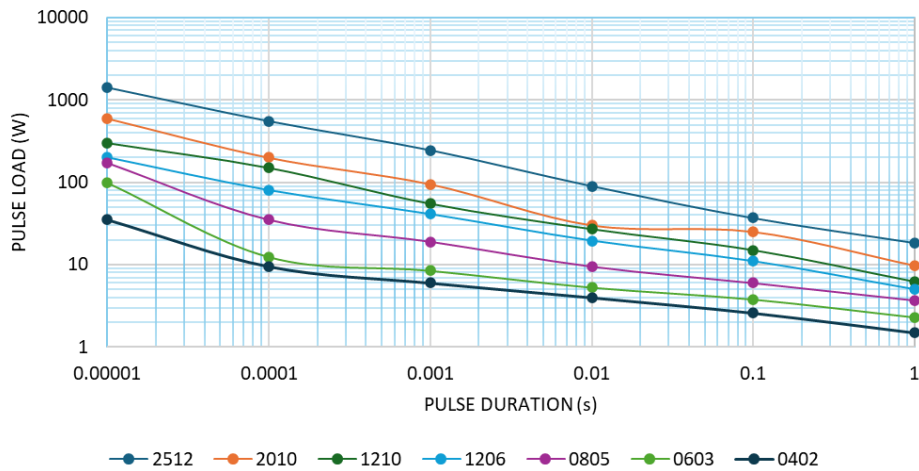

The data provided is for reference only. It is typical performance for this product but it is not guaranteed. The actual pulse handling of each individual resistor may vary depending on a variety of factors including resistance tolerance and resistance value. Stackpole Electronics, Inc. assumes no liability for the use of this information. Customers should validate the performance of these products in their applications. Contact Stackpole to discuss specific pulse application requirements.

## Reel Specifications

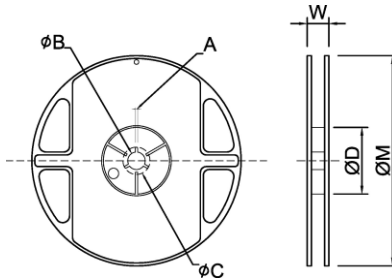

| Type                     | Size(*) |          | A                            | ØB                            | ØC                            | ØD                            | W                             | ØM                             | Unit         |
|--------------------------|---------|----------|------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|--------------|
| 0402                     | 7"      | 10K/Reel | 0.079 ± 0.020<br>2.00 ± 0.50 | 0.531 ± 0.039<br>13.50 ± 1.00 | 0.827 ± 0.039<br>21.00 ± 1.00 | 2.362 ± 0.039<br>60.00 ± 1.00 | 0.453 ± 0.079<br>11.50 ± 2.00 | 7.008 ± 0.079<br>178.00 ± 2.00 | inches<br>mm |
| 0603, 0805<br>1206, 1210 | 7"      | 5K/Reel  | 0.079 ± 0.020<br>2.00 ± 0.50 | 0.531 ± 0.039<br>13.50 ± 1.00 | 0.827 ± 0.039<br>21.00 ± 1.00 | 2.362 ± 0.039<br>60.00 ± 1.00 | 0.453 ± 0.079<br>11.50 ± 2.00 | 7.008 ± 0.079<br>178.00 ± 2.00 | inches<br>mm |
| 2010, 2512<br>1812       | 7"      | 4K/Reel  | 0.079 ± 0.020<br>2.00 ± 0.50 | 0.531 ± 0.039<br>13.50 ± 1.00 | 0.827 ± 0.039<br>21.00 ± 1.00 | 2.362 ± 0.039<br>60.00 ± 1.00 | 0.630 ± 0.079<br>16.00 ± 2.00 | 7.008 ± 0.079<br>178.00 ± 2.00 | inches<br>mm |

(\*) Larger reel sizes may be available. Contact Stackpole Electronics.


# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.

Resistive Product Solutions


## Taping Specifications - Paper Tape

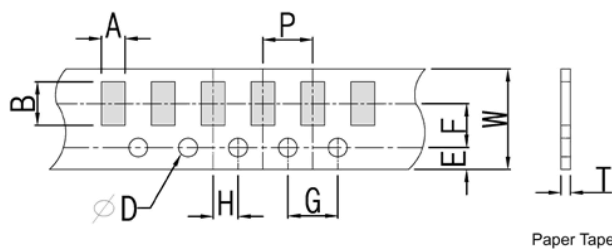

Paper Tape

| Size | A                            | B                            | W                            | E                                | F                            | Unit         |
|------|------------------------------|------------------------------|------------------------------|----------------------------------|------------------------------|--------------|
| 0402 | 0.028 ± 0.004<br>0.70 ± 0.10 | 0.047 ± 0.004<br>1.20 ± 0.10 | 0.315 ± 0.008<br>8.00 ± 0.20 | 0.069 ± 0.004<br>1.75 ± 0.10     | 0.138 ± 0.002<br>3.50 ± 0.05 | inches<br>mm |
| 0603 | 0.041 ± 0.008<br>1.05 ± 0.20 | 0.071 ± 0.008<br>1.80 ± 0.20 | 0.315 ± 0.008<br>8.00 ± 0.20 | 0.069 ± 0.004<br>1.75 ± 0.10     | 0.138 ± 0.002<br>3.50 ± 0.05 | inches<br>mm |
| 0805 | 0.061 ± 0.008<br>1.55 ± 0.20 | 0.091 ± 0.008<br>2.30 ± 0.20 | 0.315 ± 0.008<br>8.00 ± 0.20 | 0.069 ± 0.004<br>1.75 ± 0.10     | 0.138 ± 0.002<br>3.50 ± 0.05 | inches<br>mm |
| 1206 | 0.075 ± 0.008<br>1.90 ± 0.20 | 0.138 ± 0.008<br>3.50 ± 0.20 | 0.315 ± 0.008<br>8.00 ± 0.20 | 0.069 ± 0.004<br>1.75 ± 0.10     | 0.138 ± 0.002<br>3.50 ± 0.05 | inches<br>mm |
| 1210 | 0.112 ± 0.008<br>2.85 ± 0.20 | 0.138 ± 0.008<br>3.50 ± 0.20 | 0.315 ± 0.008<br>8.00 ± 0.20 | 0.069 ± 0.004<br>1.75 ± 0.10     | 0.138 ± 0.002<br>3.50 ± 0.05 | inches<br>mm |
| Size | G                            | H                            | T                            | ØD                               | P                            | Unit         |
| 0402 | 0.157 ± 0.004<br>4.00 ± 0.10 | 0.079 ± 0.002<br>2.00 ± 0.05 | 0.018 ± 0.004<br>0.45 ± 0.10 | 0.059 +0.004/-0<br>1.50 +0.10/-0 | 0.079 ± 0.004<br>2.00 ± 0.10 | inches<br>mm |
| 0603 | 0.157 ± 0.004<br>4.00 ± 0.10 | 0.079 ± 0.002<br>2.00 ± 0.05 | 0.024 ± 0.004<br>0.60 ± 0.10 | 0.059 +0.004/-0<br>1.50 +0.10/-0 | 0.157 ± 0.004<br>4.00 ± 0.10 | inches<br>mm |
| 0805 | 0.157 ± 0.004<br>4.00 ± 0.10 | 0.079 ± 0.002<br>2.00 ± 0.05 | 0.030 ± 0.004<br>0.75 ± 0.10 | 0.059 +0.004/-0<br>1.50 +0.10/-0 | 0.157 ± 0.004<br>4.00 ± 0.10 | inches<br>mm |
| 1206 | 0.157 ± 0.004<br>4.00 ± 0.10 | 0.079 ± 0.002<br>2.00 ± 0.05 | 0.030 ± 0.004<br>0.75 ± 0.10 | 0.059 +0.004/-0<br>1.50 +0.10/-0 | 0.157 ± 0.004<br>4.00 ± 0.10 | inches<br>mm |
| 1210 | 0.157 ± 0.004<br>4.00 ± 0.10 | 0.079 ± 0.002<br>2.00 ± 0.05 | 0.030 ± 0.004<br>0.75 ± 0.10 | 0.059 +0.004/-0<br>1.50 +0.10/-0 | 0.157 ± 0.004<br>4.00 ± 0.10 | inches<br>mm |

## Taping Specifications - Plastic Tape

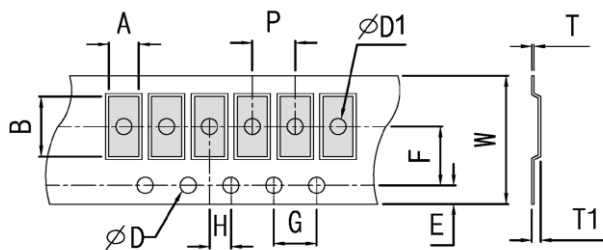

Plastic Tape

| Size | A                            | B                            | W                             | E                            | F                            | G                            | Unit         |
|------|------------------------------|------------------------------|-------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| 2010 | 0.110 ± 0.008<br>2.80 ± 0.20 | 0.220 ± 0.008<br>5.60 ± 0.20 | 0.472 ± 0.004<br>12.00 ± 0.10 | 0.069 ± 0.004<br>1.75 ± 0.10 | 0.217 ± 0.002<br>5.50 ± 0.05 | 0.157 ± 0.004<br>4.00 ± 0.10 | inches<br>mm |
| 2512 | 0.134 ± 0.008<br>3.40 ± 0.20 | 0.264 ± 0.008<br>6.70 ± 0.20 | 0.472 ± 0.004<br>12.00 ± 0.10 | 0.069 ± 0.004<br>1.75 ± 0.10 | 0.217 ± 0.002<br>5.50 ± 0.05 | 0.157 ± 0.004<br>4.00 ± 0.10 | inches<br>mm |
| 1812 | 0.130 ± 0.008<br>3.30 ± 0.20 | 0.181 ± 0.008<br>4.60 ± 0.20 | 0.472 ± 0.004<br>12.00 ± 0.10 | 0.069 ± 0.004<br>1.75 ± 0.10 | 0.217 ± 0.002<br>5.50 ± 0.05 | 0.157 ± 0.004<br>4.00 ± 0.10 | inches<br>mm |

Rev Date: 1/10/2025

This specification may be changed at any time without prior notice.  
Please confirm technical specifications before use.

[www.seielect.com](http://www.seielect.com)  
[marketing@seielect.com](mailto:marketing@seielect.com)

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.

Resistive Product Solutions

## Taping Specifications - Plastic Tape (cont.)

| Size     | H                            | T                            | ØD                               | ØD1                          | T1                           | P                            | Unit         |
|----------|------------------------------|------------------------------|----------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| 2010     | 0.079 ± 0.002<br>2.00 ± 0.05 | 0.009 ± 0.004<br>0.23 ± 0.10 | 0.059 +0.004/-0<br>1.50 +0.10/-0 | 0.059 ± 0.004<br>1.50 ± 0.10 | 0.033 ± 0.006<br>0.85 ± 0.15 | 0.157 ± 0.004<br>4.00 ± 0.10 | inches<br>mm |
| RMEF2512 | 0.079 ± 0.002<br>2.00 ± 0.05 | 0.009 ± 0.004<br>0.23 ± 0.10 | 0.059 +0.004/-0<br>1.50 +0.10/-0 | 0.059 ± 0.004<br>1.50 ± 0.10 | 0.033 ± 0.006<br>0.85 ± 0.15 | 0.157 ± 0.004<br>4.00 ± 0.10 | inches<br>mm |
| RMEP2512 | 0.079 ± 0.002<br>2.00 ± 0.05 | 0.009 ± 0.004<br>0.23 ± 0.10 | 0.059 +0.004/-0<br>1.50 +0.10/-0 | 0.059 ± 0.004<br>1.50 ± 0.10 | 0.037 ± 0.006<br>0.95 ± 0.15 | 0.157 ± 0.004<br>4.00 ± 0.10 | inches<br>mm |
| 1812     | 0.079 ± 0.002<br>2.00 ± 0.05 | 0.009 ± 0.004<br>0.23 ± 0.10 | 0.059 +0.004/-0<br>1.50 +0.10/-0 | 0.059 ± 0.004<br>1.50 ± 0.10 | 0.033 ± 0.006<br>0.85 ± 0.15 | 0.157 ± 0.004<br>4.00 ± 0.10 | inches<br>mm |

## Part Marking Specifications


### E96 and E24 Values for 0805-2512 (0.1%, 0.5% and 1% tolerances)

The nominal resistance is marked on the surface of the overcoating with the use of **four character markings**.

1. Values <100Ω will use "R" as the decimal holder.



1.21Ω




100Ω

### E24 Values for 0805-2512 (5% and 10% tolerances)

The nominal resistance is marked on the surface of the overcoating with the use of **three character markings**.

1. Values between 1Ω and 9.1Ω will use "R" as the decimal holder.



1Ω




1.2 KΩ


### E24 Values for 0603

The nominal resistance is marked on the surface of the overcoating with the use of **three character markings**.

1. Values between 1Ω and 9.1Ω will use "R" as the decimal holder.
2. 5% tolerance is not underlined. 1% tolerance is underlined. (Effective date for 1% underline marking is April 1, 2025.)
3. Values that are both E24 and E96 follow E96 marking rules.



1Ω 5%



10Ω 5%




220Ω 1%

### E96 Values for 0603 size (0.1%, 0.5% and 1% tolerances)

A two character number is assigned to each standard R-Value (E96) as shown in the chart below. This is followed by one alpha character which is used as a multiplier.

Each letter from "Y" - "F" represents a specific multiplier.



10.5Ω

| Alpha Character = Multiplier |             | Chip Marking = Value       |  |
|------------------------------|-------------|----------------------------|--|
| Y = 0.1                      | C = 1000    | 01Y = 10.0 x 0.1 = 1Ω      |  |
| X = 1                        | D = 10000   | 01B = 10.0 x 100 = 1KΩ     |  |
| A = 10                       | E = 100000  | 25C = 17.8 x 1000 = 17.8KΩ |  |
| B = 100                      | F = 1000000 | 01F = 10.0 x 100000 = 10MΩ |  |

### E96

| #  | R-Value | #  | R-Value | #  | R-Value | #  | R-Value | #  | R-Value | #  | R-Value |
|----|---------|----|---------|----|---------|----|---------|----|---------|----|---------|
| 01 | 10.0    | 17 | 14.7    | 33 | 21.5    | 49 | 31.6    | 65 | 46.4    | 81 | 68.1    |
| 02 | 10.2    | 18 | 15.0    | 34 | 22.1    | 50 | 32.4    | 66 | 47.5    | 82 | 69.8    |
| 03 | 10.5    | 19 | 15.4    | 35 | 22.6    | 51 | 33.2    | 67 | 48.7    | 83 | 71.5    |
| 04 | 10.7    | 20 | 15.8    | 36 | 23.2    | 52 | 34.0    | 68 | 49.9    | 84 | 73.2    |
| 05 | 11.0    | 21 | 16.2    | 37 | 23.7    | 53 | 34.8    | 69 | 51.1    | 85 | 75.0    |
| 06 | 11.3    | 22 | 16.5    | 38 | 24.3    | 54 | 35.7    | 70 | 52.3    | 86 | 76.8    |
| 07 | 11.5    | 23 | 16.9    | 39 | 24.9    | 55 | 36.5    | 71 | 53.6    | 87 | 78.7    |
| 08 | 11.8    | 24 | 17.4    | 40 | 25.5    | 56 | 37.4    | 72 | 54.9    | 88 | 80.6    |
| 09 | 12.1    | 25 | 17.8    | 41 | 26.1    | 57 | 38.3    | 73 | 56.2    | 89 | 82.5    |
| 10 | 12.4    | 26 | 18.2    | 42 | 26.7    | 58 | 39.2    | 74 | 57.6    | 90 | 84.5    |
| 11 | 12.7    | 27 | 18.7    | 43 | 27.4    | 59 | 40.2    | 75 | 59.0    | 91 | 86.6    |
| 12 | 13.0    | 28 | 19.1    | 44 | 28.0    | 60 | 41.2    | 76 | 60.4    | 92 | 88.7    |
| 13 | 13.3    | 29 | 19.6    | 45 | 28.7    | 61 | 42.2    | 77 | 61.9    | 93 | 90.9    |
| 14 | 13.7    | 30 | 20.0    | 46 | 29.4    | 62 | 43.2    | 78 | 63.4    | 94 | 93.1    |
| 15 | 14.0    | 31 | 20.5    | 47 | 30.1    | 63 | 44.2    | 79 | 64.9    | 95 | 95.3    |
| 16 | 14.3    | 32 | 21.0    | 48 | 30.9    | 64 | 45.3    | 80 | 66.5    | 96 | 97.6    |

Note: 0402 resistors are not marked.

## RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

| RoHS Compliance Status  |  |                            |                                |                                   |  |                                       |
|-------------------------|--|----------------------------|--------------------------------|-----------------------------------|--|---------------------------------------|
| Standard Product Series | Description  | Package / Termination Type | Standard Series RoHS Compliant | Lead-Free Termination Composition | Lead-Free Mfg. Effective Date (Std Product Series) | Lead-Free Effective Date Code (YY/WW) |
| RMEF                    | General Purpose Thick Film Surface Mount Chip Resistor<br>100% Lead Free | SMD                        | YES                            | 100% Matte Sn over Ni             | Always   | Always                                |
| RMEP                    | Thick Film High Power Surface Mount Chip Resistor<br>100% Lead Free      | SMD                        | YES                            | 100% Matte Sn over Ni             | Always   | Always                                |

## "Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

## Compliance to "REACH"

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

## Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions

## How to Order - RMEF

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R | M | E | F | 0 | 6 | 0 | 3 | J | T | 1 | 0 | R | 0 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

| Product Series |                          | Size |       | Tolerance |     |          | Packaging (*)        |                    |            |          | Resistance Value   |
|----------------|--------------------------|------|-------|-----------|-----|----------|----------------------|--------------------|------------|----------|--|
| Code           | Description              | Size | W     | Code      | Tol | Value    | Code                 | Description        | Size       | Quantity |  |
| RMEF           | Thick Film Chip Resistor | 0402 | 0.063 | F         | 1%  | E96, E24 | T                    | 7" Reel Paper Tape | 0402       | 10000    | Four characters with the multiplier used as the decimal holder.<br>1 ohm = 1R00<br>10 ohm = 10R0<br>100 Kohm = 100K<br>1 Mohm = 1M00<br>Zero ohm jumper = 0R00 |
|                |                          | 0603 | 0.1   | J         | 5%  | E24      |                      |                    | 0603, 0805 | 5000     |  |
|                |                          | 0805 | 0.125 | Z         |     | Jumper   | 7" Reel Plastic Tape | 2010, 2512         | 4000       |          |  |
|                |                          | 1206 | 0.25  |           |     |          |                      | 1812               |            |          |  |
|                |                          | 1210 | 0.5   |           |     |          |                      |                    |            |          |  |
|                |                          | 1812 | 0.75  |           |     |          |                      |                    |            |          |  |
|                |                          | 2010 | 0.75  |           |     |          |                      |                    |            |          |  |
|                |                          | 2512 | 1     |           |     |          |                      |                    |            |          |  |

(\*) Larger reel sizes may be available.  
Contact Stackpole Electronics.

## How to Order - RMEP

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R | M | E | P | 0 | 6 | 0 | 3 | J | T | 1 | 0 | R | 0 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

| Product Series |                       | Size |       | Tolerance |      |          | Packaging (*)        |                    |            |          | Resistance Value   |
|----------------|-----------------------|------|-------|-----------|------|----------|----------------------|--------------------|------------|----------|--|
| Code           | Description           | Size | W     | Code      | Tol  | Value    | Code                 | Description        | Size       | Quantity |  |
| RMEP           | Thick Film High Power | 0402 | 0.1   | B         | 0.1% | E96, E24 | T                    | 7" Reel Paper Tape | 0402       | 10000    | Four characters with the multiplier used as the decimal holder.<br>1 ohm = 1R00<br>10 ohm = 10R0<br>100 Kohm = 100K<br>1 Mohm = 1M00<br>Zero ohm jumper = 0R00 |
|                |                       | 0603 | 0.125 | D         | 0.5% |          |                      |                    | 0603, 0805 | 5000     |  |
|                |                       | 0805 | 0.25  | F         | 1%   | E24      | 7" Reel Plastic Tape | 2010, 2512         | 4000       |          |  |
|                |                       | 1206 | 0.5   | J         | 5%   |          |                      | 1812               |            |          |  |
|                |                       | 1210 | 0.66  | K         | 10%  |          |                      |                    |            |          |  |
|                |                       | 1812 | 1     | Z         |      | Jumper   |                      |                    |            |          |  |
|                |                       | 2010 | 1     |           |      |          |                      |                    |            |          |  |
|                |                       | 2512 | 2     |           |      |          |                      |                    |            |          |  |

(\*) Larger reel sizes may be available.  
Contact Stackpole Electronics.