OVERVIEW CATALOG SEGMENTS FEATURED FIND A DISTRIBUTOR RESOURCE CENTER

MY ACCOUNT CONTACT US

SEARCH KEYWORD, PART NUMBER

Part Number: 15324985

SINGLE WIRE SEAL FITS TO 6.7 mm CAVITY

Share Drint Contact Us About This Item

GET SAMPLES -











ATTRIBUTES

DOCUMENTS

ECAD

# **Attributes**

Type SINGLE WIRE SEAL

Outer Diameter (mm)

7.25

Barehole Diameter (mm)

1.25

Length (mm)

7.5

Min Cable Outer Diameter (mm) 1.6

Max Cable Outer Diameter (mm) 2.15

Color **VIOLET**  50

Hardness (Shore)

Contains Lubricant (Oil Content) Low

Restraint Ring


No

Min. operating temperature

-40°C


Max. operating temperature +140°C

# **Other Products**



35829171

2 Way Male 0.5 Unsealed Green



35829170

2 Way Male 0.5 Unsealed Violet




35829169


2 Way Male 0.5 Unsealed Blue

RESOURCE-CENTER-

COV CONN CLIP CDT BLACK

ITEM

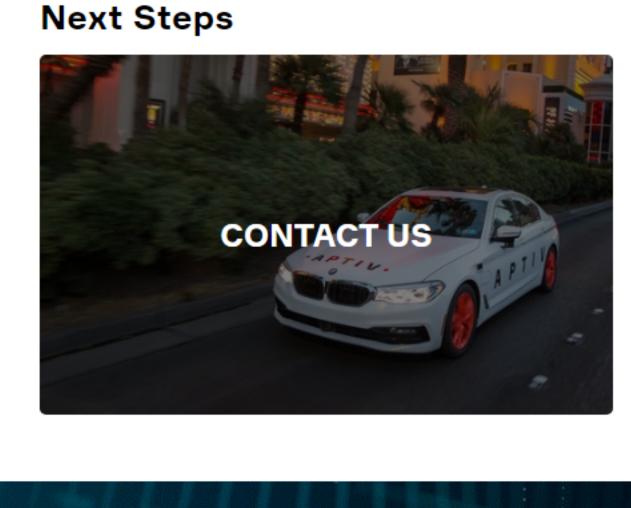

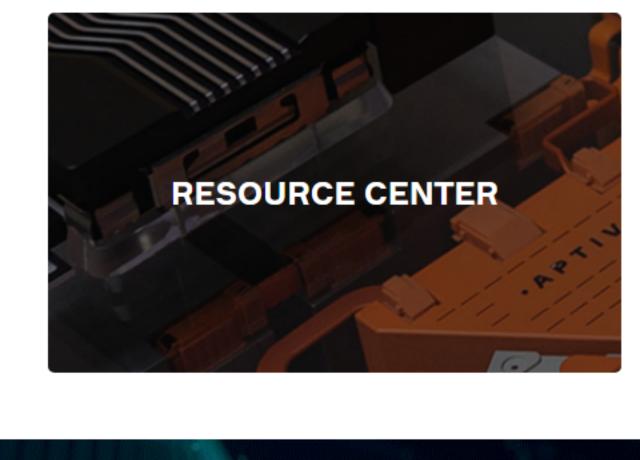

## where mobility is going. See what's next and get the latest updates.

Keep pace with

Don't worry. We won't flood your inbox or share your email.

SIGN UP TO GET

**UPDATES** 

· APTIV ·

### **ARTICLES** CASE STUDIES MOBILITY INSIDER

INSIGHTS

EXPLORE ALL

RESEARCH PUBLICATIONS WHITE PAPERS

NYSE APTV **71.09** ▼ -1.32 (-1.82%)

# **Connection Systems**

Connected Services

SOLUTIONS

Advanced Safety

Connectivity and Security **Electrical Distribution** Systems Middleware & DevOps Smart Vehicle Architecture User Experience Vehicle Electrification Systems HellermannTyton Intercable Automotive Solutions Motional

Winchester Interconnect

## Our Locations Our Foundation

**ABOUT** 

Our Mission

Our Businesses

Sustainability Suppliers

## Cookie Policy LEGAL &

PRIVACY

Terms of Use


COMPLIANCE

CONTACT

**CAREERS** 

INVESTORS

NEWSROOM



CATALOG

Wind River