



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect


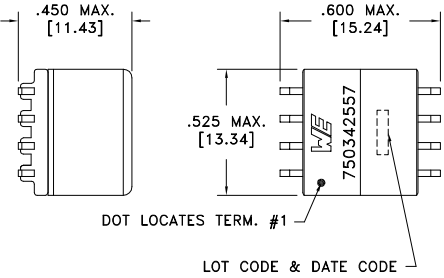


TERM. NO.'s FOR REF. ONLY



DOT LOCATES TERM. #1

LOT CODE & DATE CODE

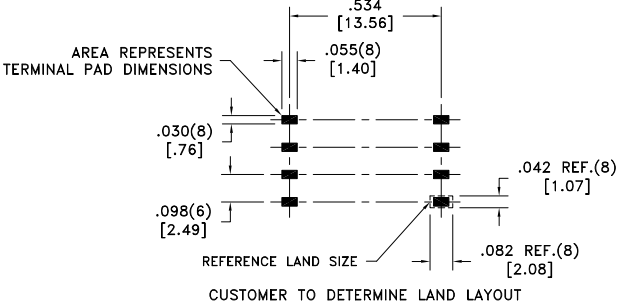

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	0.086 ohms max.
D.C. RESISTANCE	7-8 @20°C	0.700 ohms max.
D.C. RESISTANCE	5-6 @20°C	0.540 ohms max.
INDUCTANCE	1-4 50kHz, 100mVAC, Ls	50uH ±10%
SATURATION CURRENT	20% rolloff from initial	1.4A min.
LEAKAGE INDUCTANCE	1-4 tie(5+6+7+8), 100kHz, 100mVAC, Ls	0.35uH max.
CAPACITANCE	1-5 tie(6+7), 100kHz, 100mVAC, Cs	120pF max.
DIELECTRIC	1-5 tie(6+7), 1500VAC, 1 second	-
URNS RATIO	(5-6):(4-1)	1.8:1, ±2%
URNS RATIO	(5-6):(7-8)	1:1, ±2%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0328 www.we-online.com/midcom		Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$	INDUCTOR	750342557
6B	9/16			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750342557	SPECIFICATION SHEET 1 OF 1
6A	1/15	SEE REVISION SHEET FOR REVISION LEVEL				



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[750342557](#)