


Product data sheet

Specifications



Wall mounted polyester enclosure,
Thalassa PLM, plain door, with
bakelite plate, 747x536x300mm,
IP66, IK10, RAL 7035

NSYPLM75BG

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range	PanelSeT
Device short name	PLM
Enclosure type	Multi-purpose
Category	Compact enclosure
Nominal height	29.4 in (747 mm)
Nominal width	21.1 in (536 mm)
Nominal depth	11.8 in (300 mm)
Enclosure mounting	Wall mounted
Device composition	1 body 1 door 1 mounting plate 2 lock
Door type	Solid
Lock type	3 mm double-bar lock

Complementary

Number of locks	2
Mounting plate description	Plain bakelite
Accessibility for operation	Front
Removable parts	Door by hinges Mounting plate by fixing element
Material	polyester reinforced with fibreglass
color	Gray RAL 7035)
Standards	NEMA classification 13 IEC 62208 NEMA classification 4X
Product Certifications	UL
Electrical Insulation Class	Class II

Environment

IP degree of protection	IP66 IEC 60529
IK degree of protection	IK10 IEC 62262
Fire resistance	1760 °F (960 °C) IEC 62208

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient Air Temperature for Operation -40...176 °F (-40...80 °C)

Ordering and shipping details

Category	US10ES180034
Discount Schedule	0ES1
GTIN	3606480776700
Returnability	No
Country of origin	ES

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	12.80 in (32.500 cm)
Package 1 Width	22.05 in (56.000 cm)
Package 1 Length	32.09 in (81.500 cm)
Package weight(Lbs)	36.090 lb(US) (16.370 kg)
Unit Type of Package 2	PAM
Number of Units in Package 2	12
Package 2 Height	70.08 in (178.000 cm)
Package 2 Width	39.37 in (100.000 cm)
Package 2 Length	47.24 in (120.000 cm)
Package 2 Weight	456.357 lb(US) (207.000 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 128

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Average percentage of recycled plastic content 37 %

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number 2afadc3c-d04d-4184-9d1f-3abc2fc1a548

REACH Regulation [REACH Declaration](#)

Use Again

Repack and remanufacture

Circularity Profile No need of specific recycling operations

Take-back No

Technical Illustration

Dimensions

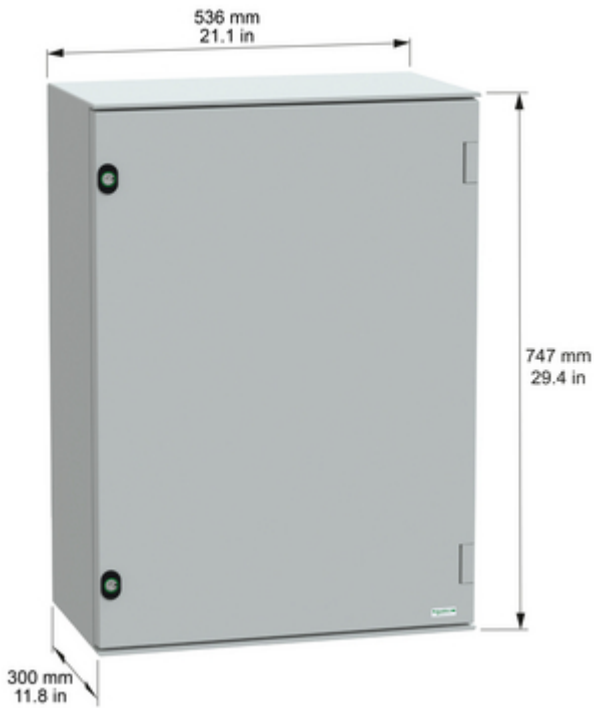


Image of product / Alternate images

Alternative







Image of product in real life situation



Offer Marketing Illustration

Packaging

