

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

KEYING OPTION A





(SHOW WITH CPA)

KEYING OPTION C





(SHOW WITH CPA)

KEYING OPTION D





(SHOW WITH CPA)

KEYING OPTION E





(SHOW WITH CPA)

KEYING OPTION F





(SHOW WITH CPA)

KEYING OPTION G



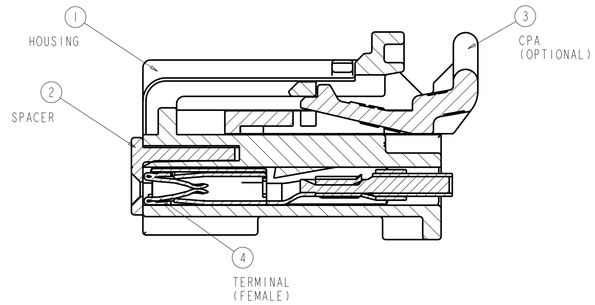

(SHOW WITH CPA)

KEYING OPTION H

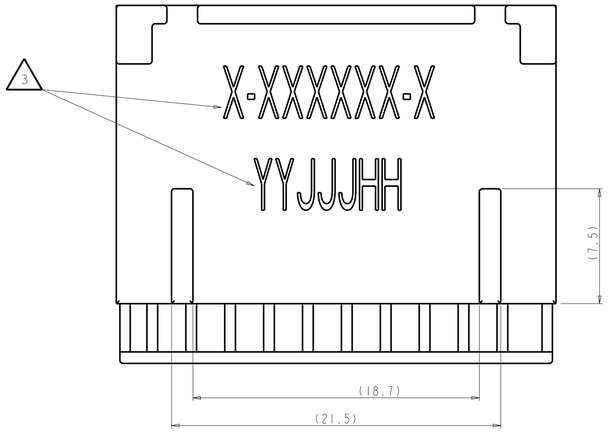


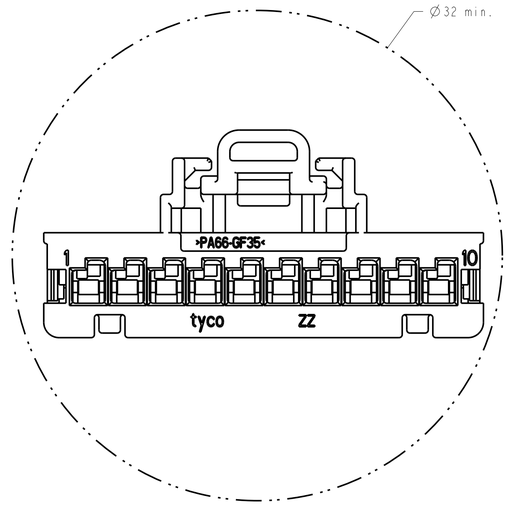

(SHOW WITH CPA)

SHOWING MATING COMPENENTS
FOR REFERENCE ONLY

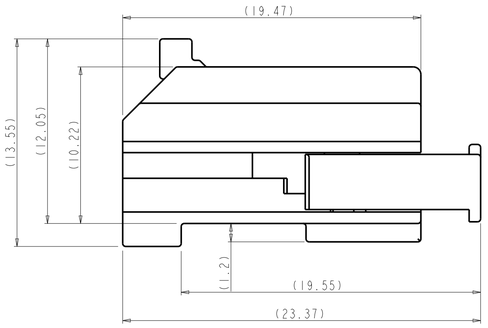


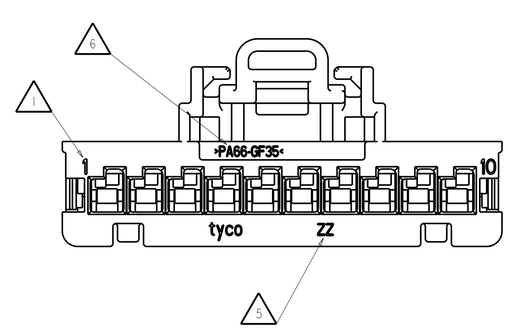

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | B8 | REVISED PER ECO-14-009167 | 17JUN2014 | DD | RL |




MINIMUM FEED THROUGH CONDITION




1. TERMINAL POSITION NUMBERS LOCATED AS SHOWN.
2. DELIVERY CONDITION: SPACER AND CPA (OPTIONAL) IN PRE INSTALLED POSITION.
3. PART NUMBER AND DATE CODE.
5. CAVITY NUMBER
6. MATERIAL IDENTIFICATION
7. PACKING: CONNECTOR ASSEMBLIES BULK PACKED IN CARDBOARD BOX.
8. KEYING "A" SHOWN.
9. DURING SHIPPING AND HANDLING THE TPA MAY BE DISPLACED TO ITS LOCKED POSITION. THE CONNECTOR CAN BE RETURNED TO ITS PROPER FUNCTION USING IS SHEET 408-10104.
10. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPERATLY) GOLD APPLICATIONS 1393364 AND 1393365. TIN APPLICATIONS 1393366 AND 1393367 FOR TERMINATION AND REELING OPTIONS SEE DRAWINGS 1393364, 1393365, 1393366 AND 1393367.

| TE ORDER NUMBER | KEYING OPTIONS H | G | F | E | D | C | A | DESCRIPTION | COLOR | MATERIAL | ITEM |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1452187-8 | I | | | | | | | FEMALE HSG, KEY H | BLACK | >PA66-GF35< | 1 |
| 1-1452187-8 | I | | | | | | | | | | |
| 1452187-7 | | I | | | | | | FEMALE HSG, KEY G | BLACK | >PA66-GF35< | 1 |
| 1-1452187-7 | | I | | | | | | | | | |
| 1452187-6 | | | I | | | | | FEMALE HSG, KEY F | BLACK | >PA66-GF35< | 1 |
| 1-1452187-6 | | | I | | | | | | | | |
| 1452187-5 | | | | I | | | | FEMALE HSG, KEY E | BLACK | >PA66-GF35< | 1 |
| 1-1452187-5 | | | | I | | | | | | | |
| 1452187-4 | | | | | I | | | FEMALE HSG, KEY D | BLACK | >PA66-GF35< | 1 |
| 1-1452187-4 | | | | | I | | | | | | |
| 1452187-3 | | | | | | I | | FEMALE HSG, KEY C | BLACK | >PA66-GF35< | 1 |
| 1-1452187-3 | | | | | | I | | | | | |
| 1452187-1 | | | | | | | I | FEMALE HSG, KEY A | BLACK | >PA66-GF35< | 1 |
| 1-1452187-1 | | | | | | | I | | | | |
| | I | I | I | I | I | I | I | SPACER | RED | >PBT-GF30< >PBT+PC-GF30 | 2 |
| | I | I | I | I | I | I | I | CPA | RED | PBT-GF20 | 3 |
| QUANTITY | | | | | | | | DESCRIPTION | COLOR | MATERIAL | ITEM |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL -
FINISH -

| | |
|---|---|
| DWN | J BAHAMONDE 06.12.01 |
| CHK | M DAUBER 06.12.01 |
| APVD | G STEINBACH 06.12.01 |
| PRODUCT SPEC | - |
| APPLICATION SPEC | - |
| WEIGHT | - |
| CUSTOMER DRAWING | |

TE Connectivity

NAME 1X10 POSITION, GET, FEMALE CONNECTOR UNSEALED, ASSEMBLY

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-1452187 | - |

SCALE 5:1 SHEET 1 OF 1 REV B8

4805 (3/13)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

1452187-1