


HK Series

[all categories](#) > [surface mount](#) > [test point](#) > [HK-3 series](#)

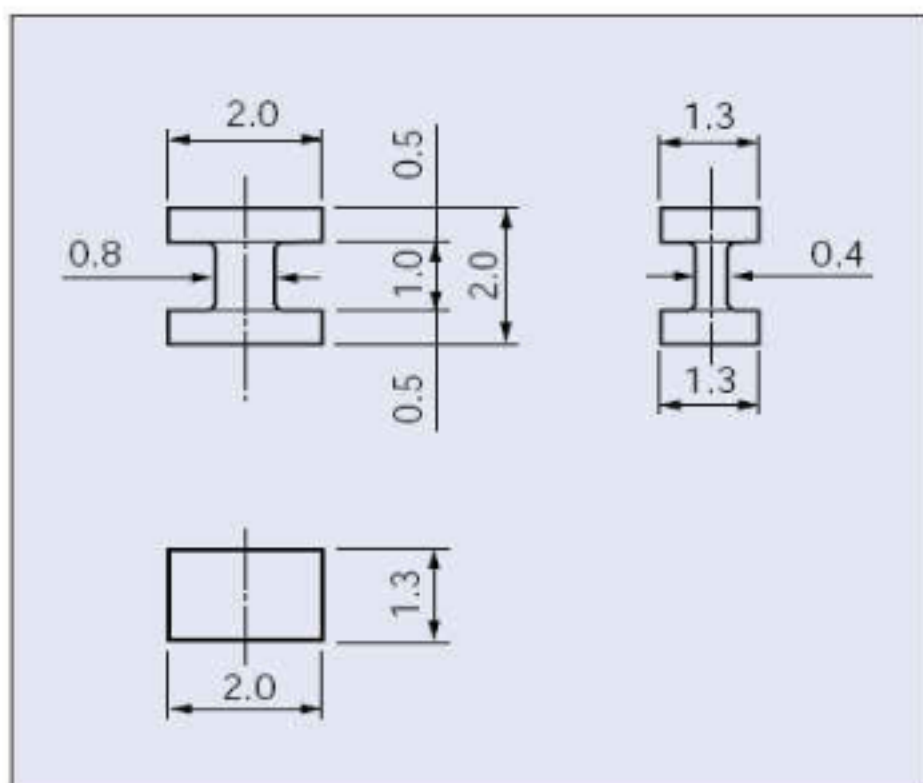

Test Point for Auto Insertion [HK-3 Series] (2x1.25 type)

- Best use for small equipments.
- In the case of reflowing by cream solder, recommended mounting land diameter should be more than 2x1.25 to strengthen the bonding.
- Finish....
HK-3-G...Au plating over Ni
HK-3-S...Sn plating over Ni
- Material....Brass

[Save To Favorites](#)
[Download Catalog](#)

[Ask a Question](#)


[Pre-Production Quote Request](#)

[Request Sample](#)


[ADD TO CART](#)

[>> request quote / information](#) | [>> download specs](#)


N/O	Package
HK-3-G-T	1500pcs/reel
HK-3-G	1000pcs/bulk
HK-3-S-T	1500pcs/reel
HK-3-S	1000pcs/bulk

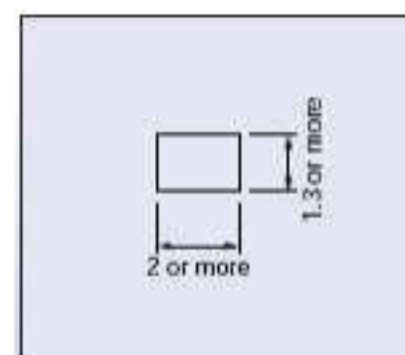

* Recommended Land Diameter

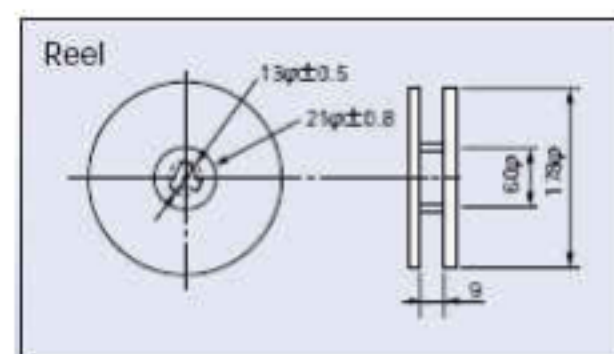

* Dimensions

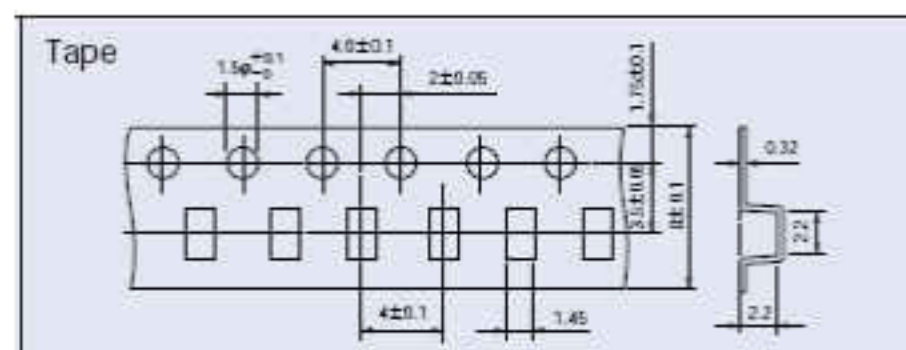

* Dimensions

[Pre-Production Quote Request](#)