

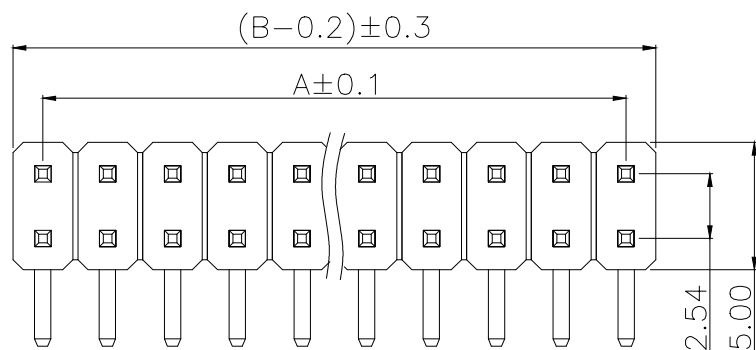
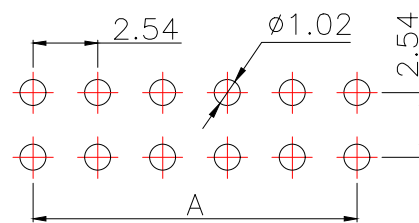


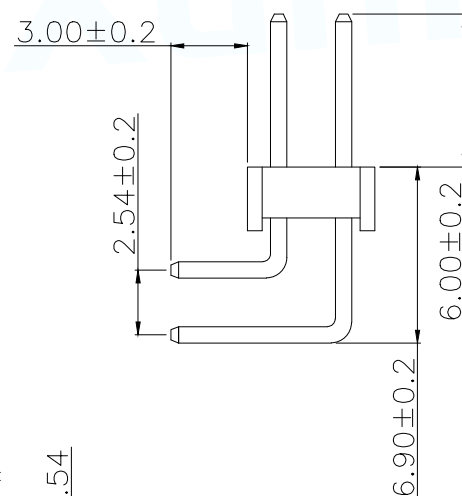

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: PA6T
Insulator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for 30-60 seconds
(260°C for 5 seconds)

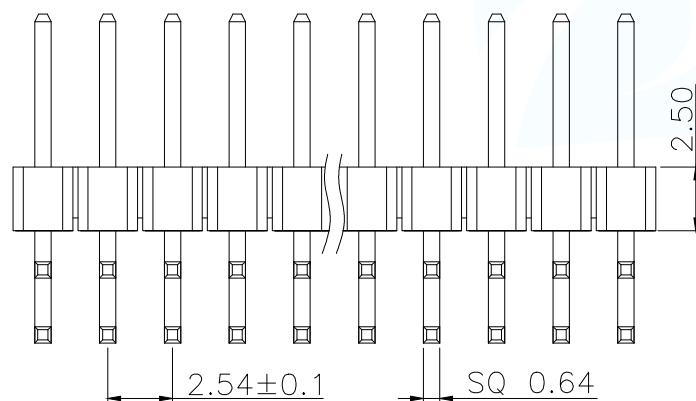

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

P/N	PIN	DIM.A	DIM.B
PH2.54-07-01PWS	2*1	0.00	2.54
PH2.54-07-02PWS	2*2	2.54	5.08
PH2.54-07-03PWS	2*3	5.08	7.62
PH2.54-07-04PWS	2*4	7.62	10.16
PH2.54-07-05PWS	2*5	10.16	12.70
PH2.54-07-06PWS	2*6	12.70	15.24
PH2.54-07-07PWS	2*7	15.24	17.78
PH2.54-07-08PWS	2*8	17.78	20.32
PH2.54-07-09PWS	2*9	20.32	22.86
.....			
PH2.54-07-40PWS	2*40	(PIN-1)X2.54	(PIN)X2.54

PART NUMBER DESCRIPTION:

PH2.54-07-NPWS

↑ (D=单排; S=双排)
↑ (Z=直脚; W=弯脚)
↑ (PIN数量; 01.....40PIN)
↑ (排针开关)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 2.54PH H2.5 2xPin 90° PC3.0 PA6.0 PB6.9 L13.8/18.8 6T 等剖面
			PAR PH2.54-07-NPWS
			DWN
			CHKD
DECIMALS:	ANGLES:	CUSTOMER COPY	APVD
X.±0.30	X°±5'		SCALE N:A
X.X±0.20	X.X°±1'		UNIT:MM
X.XX±0.10	X.XX°±0.5'	SIZE:A4	UNIT:MM
		SHEET:1F1	REV:A