


Features

- ◆ DIL-24 plastic package
- ◆ Tightly regulated output
- ◆ Very low output noise
- ◆ Short circuit protection
- ◆ Operating temperature range -25°C to +70°C
- ◆ I/O isolation 1'000 VDC
- ◆ Internal filter
- ◆ Industry standard pinout
- ◆ 3-year product warranty

not recommended for new design in

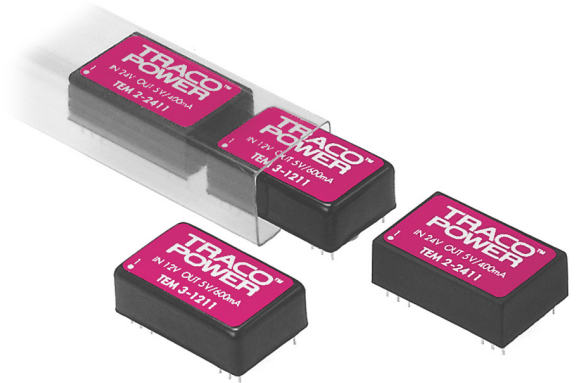

The TEM 2 series is a family of isolated dc/dc converters in a DIP-24 package. They offer tight line/load regulation and 1000 VDC I/O isolation. Standard features include an internal filter to reduce reflected input ripple current and to guarantee low output noise. This product series provides a cost effective solution by many industrial or consumer electronics applications.

Models				
Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEM 2-0511	5 VDC ±10%	5 VDC	400 mA	50 %
TEM 2-0512		12 VDC	165 mA	54 %
TEM 2-0521		±12 VDC	±80 mA	53 %
TEM 2-0522		±15 VDC	±65 mA	51 %
TEM 2-1211	12 VDC ±10%	5 VDC	400 mA	50 %
TEM 2-1212		12 VDC	165 mA	56 %
TEM 2-1221		±12 VDC	±80 mA	59 %
TEM 2-1222		±15 VDC	±65 mA	59 %
TEM 2-2411	24 VDC ±10%	5 VDC	400 mA	51 %
TEM 2-2412		12 VDC	165 mA	61 %
TEM 2-2421		±12 VDC	±80 mA	61 %
TEM 2-2422		±15 VDC	±65 mA	61 %

Input Specifications

Input current no load	5 Vin models:	80 mA typ.
	12 Vin models:	40 mA typ.
	24 Vin models:	20 mA typ.
Surge voltage (1 sec. max.)	5 Vin models:	7.5 V max.
	12 Vin models:	15 V max.
	24 Vin models:	30 V max.
Input filter	Pi-Filter	

Output Specifications

Voltage set accuracy	$\pm 3\%$	
Regulation	– Input variation Vin min. to Vin max.	$\pm 0.3\%$ max.
	– Load variation 10 – 100 %	
	single output models:	$\pm 0.5\%$ max.
	dual output models balanced load:	$\pm 1.0\%$ max.
	dual output models unbalanced load:	$\pm 3.0\%$ max.
Ripple and noise (20 MHz Bandwidth)	50 mVpk-pk max	
Temperature coefficient	$\pm 0.02\%/K$	
Current limitation	>120 % of Iout max., constant current	
Short circuit protection	indefinite	
Capacitive load	single output models:	470 μ F max.
	dual output models:	220 μ F max.

General Specifications


Temperature ranges	– Operating	–25°C to +70°C
	– Case temperature	5 VDC output models: –25°C to +60°C
	– Storage	+95°C max. –40°C to +125°C
Derating	3 %/K above +70°C	
Humidity (non condensing)	95 % rel H max.	
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)	>800'000 Mio. h	
Isolation voltage (60 sec.)	– Input/Output	1'000 VDC
Isolation capacitance	– Input/Output	100 pF typ.
Isolation resistance	– Input/Output (500 VDC)	>1'000 M Ohm
Switching frequency	80 kHz typ. (Pulse frequency modulation PFM)	
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1	
Environmental compliance	– Reach – RoHS	www.tracopower.com/info/reach-declaration.pdf directive 2011/65/EU

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	non conductive plastic (UL94V-0 rated)
Weight	12 g (0.42 oz)
Soldering temperature	max. 260°C / 10 sec.

Outline Dimensions mm (inches)

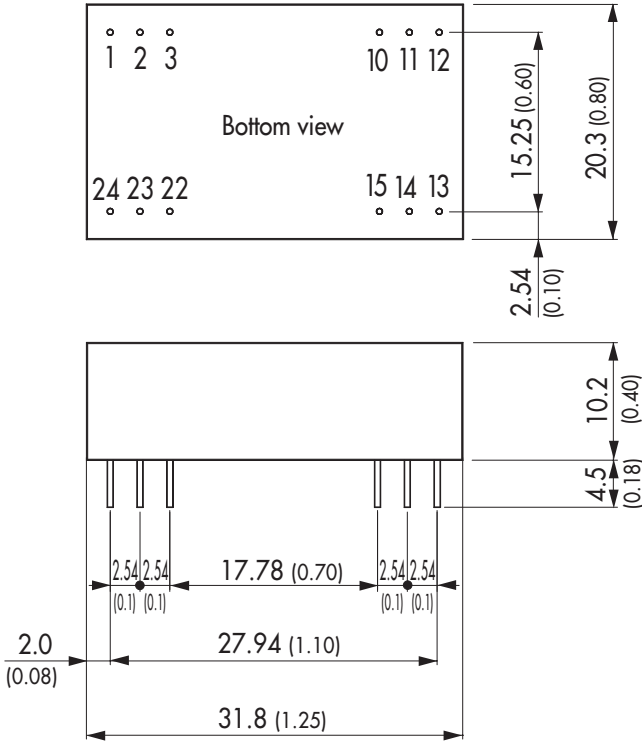

Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02) ± 0.002
Tolerances ± 0.5 (± 0.02)

Specifications can be changed any time without notice.

Pin-Out

Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	NC	-Vout
3	NC	Common
10	-Vout	Common
11	+Vout	+Vout
12	-Vin (GND)	-Vin (GND)
13	-Vin (GND)	-Vin (GND)
14	+Vout	+Vout
15	-Vout	Common
22	NC	Common
23	NC	-Vout
24	+Vin (Vcc)	+Vin (Vcc)

NC = not connected

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TRACO Power:

[TEM 2-0522](#) [TEM 2-1222](#) [TEM 2-2421](#) [TEM 2-2411](#) [TEM 2-2422](#) [TEM 2-0511](#) [TEM 2-0521](#) [TEM 2-1211](#) [TEM 2-2412](#) [TEM 2-1212](#) [TEM 2-0512](#) [TEM 2-1221](#)