




Part Number : [1729530802](#)

Product Description : Micro-Fit Terminal Position Assurance (TPA) Retainer, 8 Circuits, 3.00mm Pitch, UL 94V-2, Glow-Wire Capable, Natural

Series Number : 172953

Status : Active

Product Category : Connector Accessories

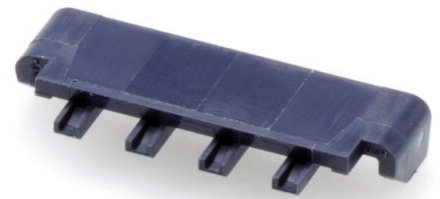

Documents and Resources

Drawings

[1729530802_sd.pdf](#)

[1729530001-PK-000.pdf](#)

3D Models and Design Files

[STEP AP242](#)

[SOLIDWORKS](#)

[Creo](#)

Specifications

[430450001-AS-000.pdf](#)

[430450001-PS-KO-000.pdf](#)

[430450001-PS-SP-000.pdf](#)

[PS-43045-001.pdf](#)


[430450007-TS-000.pdf](#)

[TS-43045-001-001.pdf](#)

[TS-43045-002-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC

	61249-2-21
REACH SVHC	Contains 1,1'-(Ethane-1,2-diyl)bis[pentabromobenzene] per D(2025)7771-DC (04 Feb 2026)
EU RoHS	Compliant per EU 2015/863

Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	Connector Accessories
Series	172953
Description	Micro-Fit Terminal Position Assurance (TPA) Retainer, 8 Circuits, 3.00mm Pitch, UL 94V-2, Glow-Wire Capable, Natural
Comments	See Product Specification for maximum current rating by circuit size and wire AWG; This Molex product is manufactured from material that has the following ratings, tested by independent agencies: a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13. b) A Glow Wire

	Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12 and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire; The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s); If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.
Component Type	Terminal Position Assurance
Product Name	Micro-Fit TPA
UPC	889056430074

Physical

Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Natural
Lock to Mating Part	Yes
Material - Resin	Nylon
Net Weight	0.101/g
Number of Rows	1
Packaging Type	Bag
Temperature Range - Operating	-40° to +105°C

Mates With / Use With

Use with Part(s)

Description	Part Number
Micro-Fit TPA Receptacle Housings	<u>172952</u>
Micro-Fit TPA Dual Row Plug Housings	<u>203632</u>

This document was generated on Apr 07, 2026