
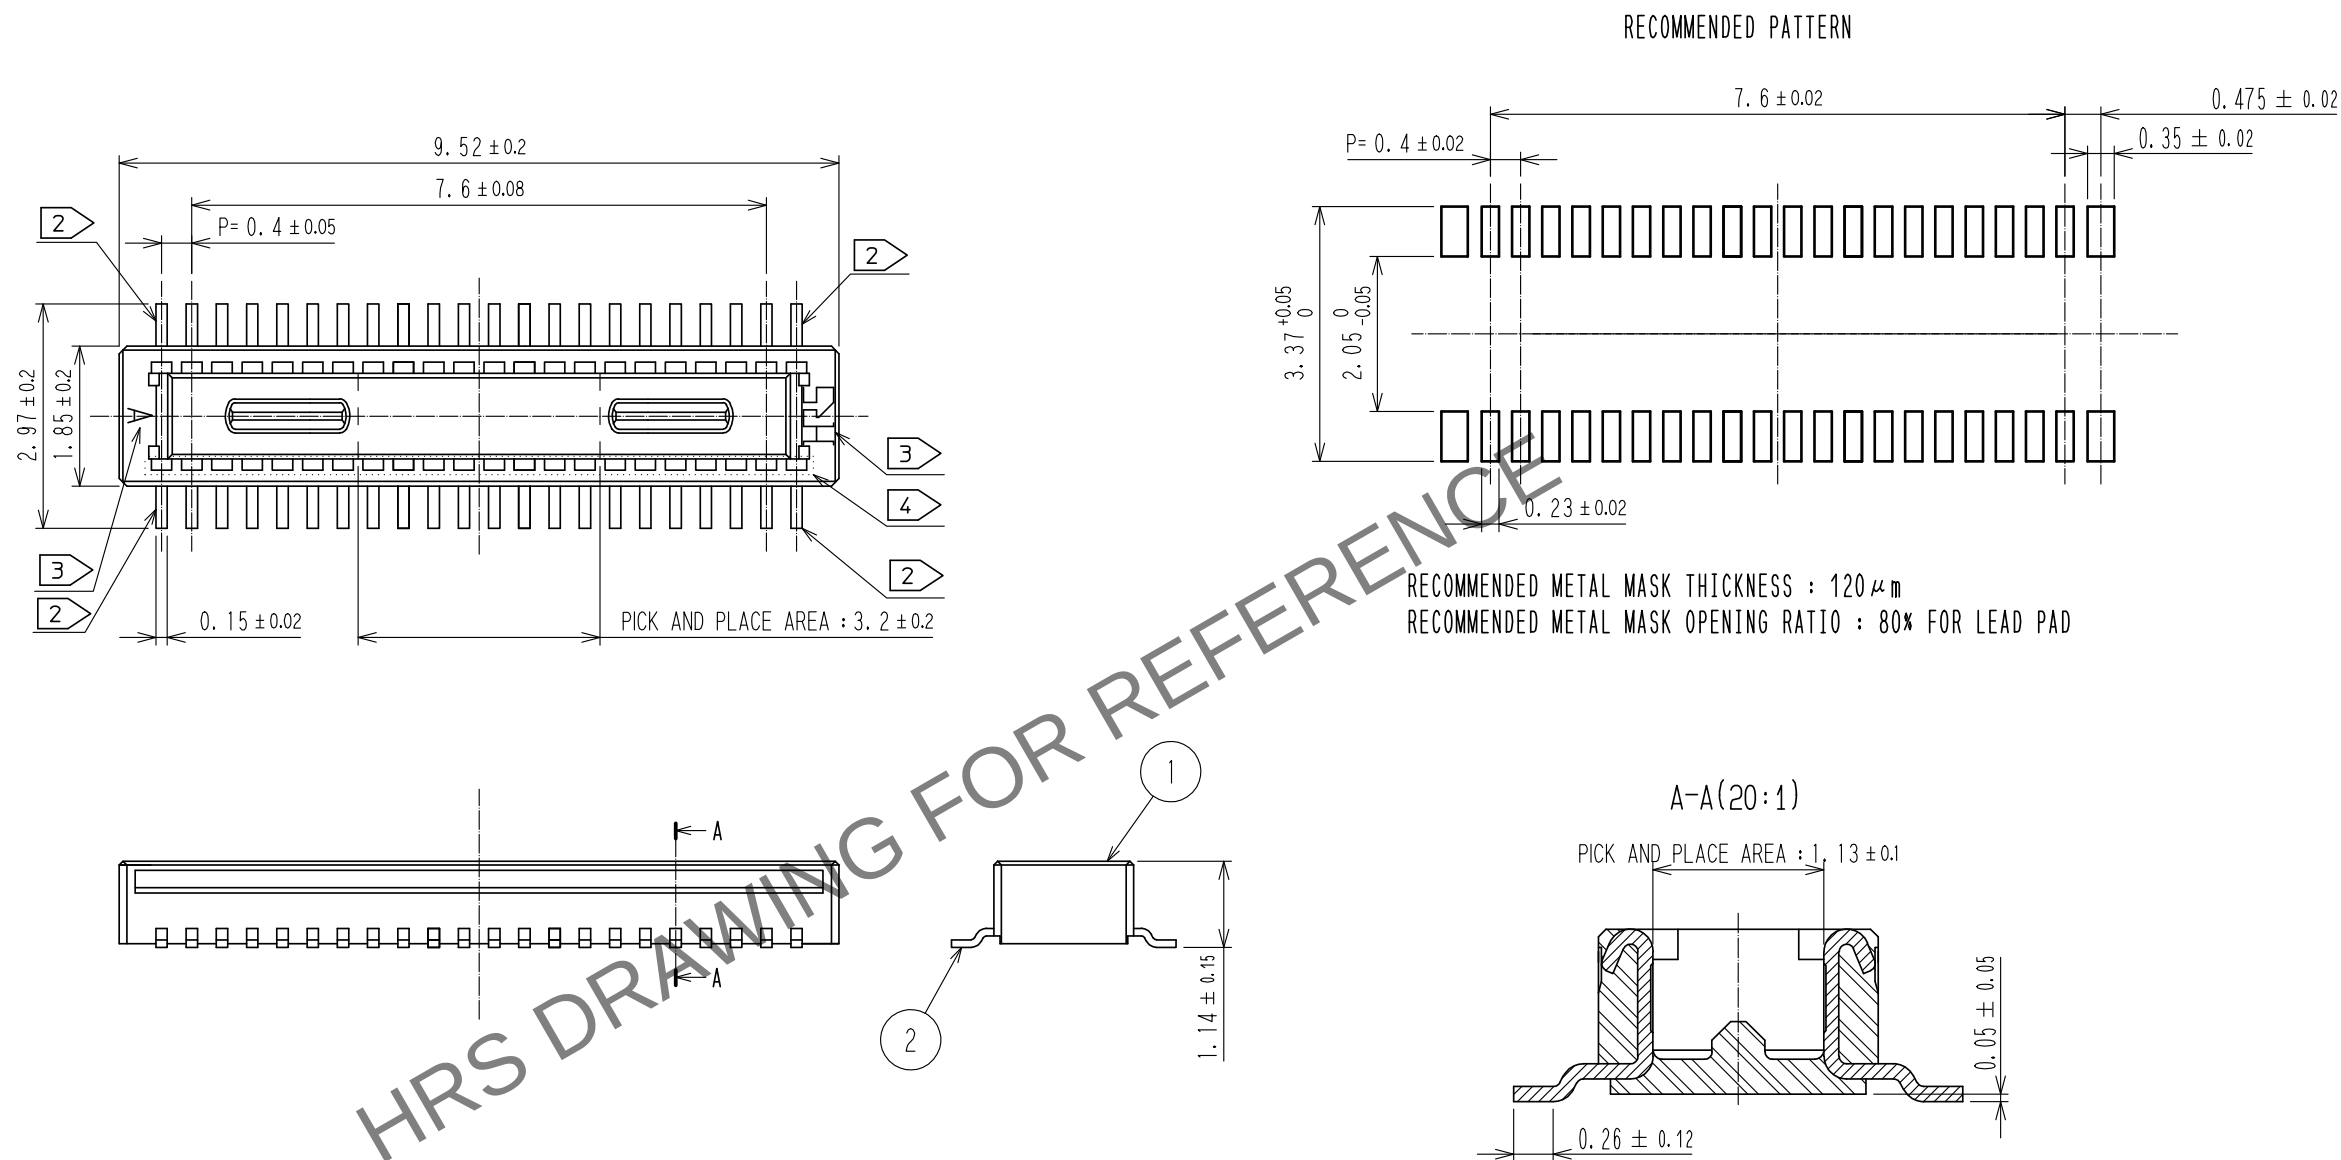


Apr.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- NOTES
- ALL LEADS CO-PLANARITY SHALL BE 0.1mm MAX.
 - EACH ONE CONTACT AT 4 CORNERS SHALL BE METAL HOLD DOWN.
 - HRS MARK AND CAV NO. ARE LOCATED IN APPROXIMAL AREA.
 - THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA. BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

	2	COPPER ALLOY	CONTACT AREA:GOLD 0.05μm MIN	6	PS	CLEAR, REINFORCEMENT COLLAR				
			SMT LEAD:GOLD 0.05μm MIN	5	PS	BLACK, PLASTIC REEL				
			UNDERPLATING:NICKEL 1μm MIN	4	POLYESTER	CLEAR, COVER TAPE				
	1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE				
NO.		MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm			SCALE 10 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-H-00005725		DESIGNED YK. SATAKE	CHECKED TS. MIYAZAKI	DATE 20200204
 HIROSE ELECTRIC CO., LTD.			APPROVED :WR. FUKUCHI		20190523	DRAWING NO. EDC-386695-51-00				
			CHECED :TS. MIYAZAKI		20190523	PART NO. DF40TC-40DP-0.4V(51)				
			DESIGNED :TY. MORISHITA		20190523	CODE NO. CL684-4264-0-51				
			DRAWN :PAN YIWEI		20190523	 				

8