
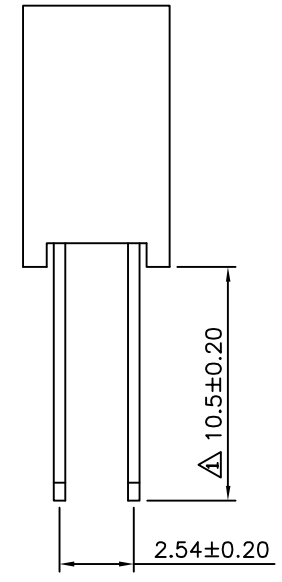
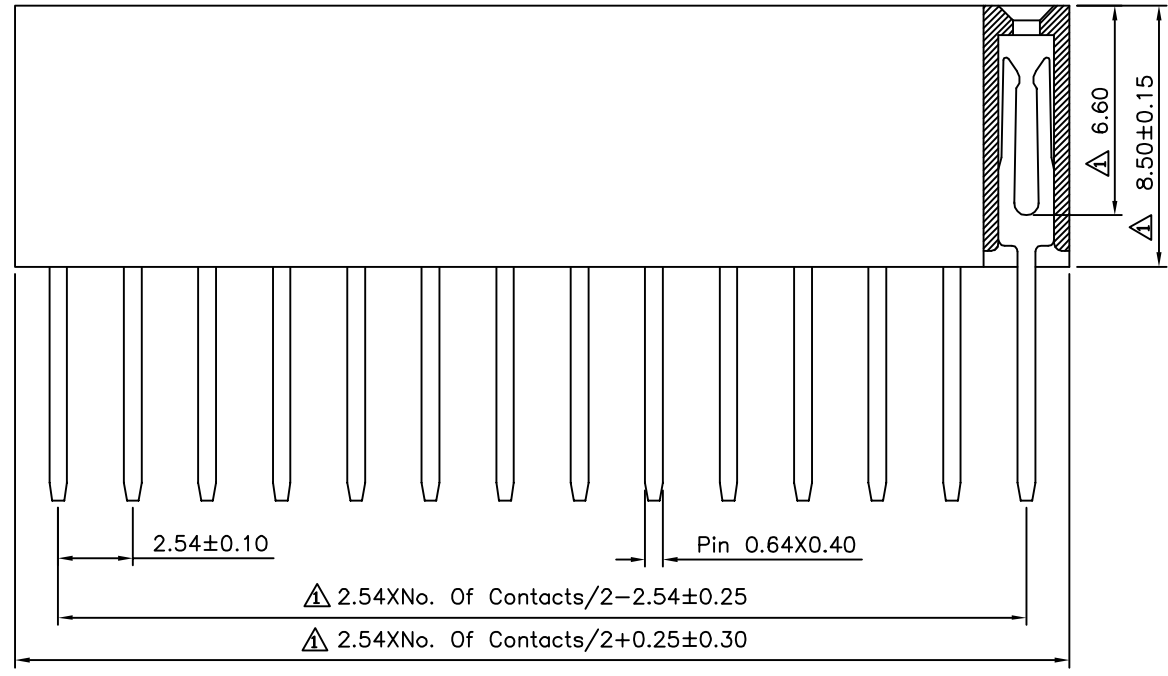


△ Recommended P.C.B. Layout(Top Side)  
(PCB Board Tolerance±0.05)

△ SPECIFICATION  
 Current Rating:3.0 Amp  
 Withstand Voltage:500V AC/DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Plated Over Nickel  
 Insulator:PBT+30%G.F.(UL94V-0),Black  
 RoHS Compliant

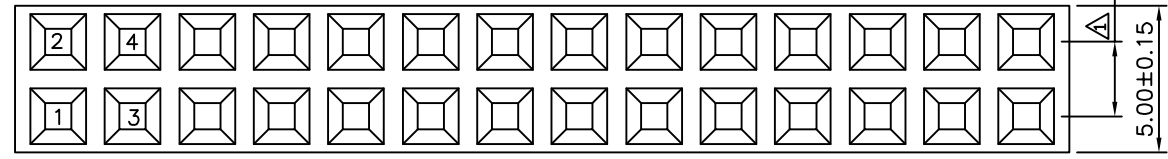

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
18507		EMILY	
		CHECKED BY	
		HZF	
		DRAWING BY	
		SONG	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.40  
 .XX ±0.25  
 .XXX ±0.15  
 ANG. ±3°

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	06/22/2011
△ A0		NEW RELEASE	HZF	02/08/2007

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Adafruit:](#)

[2223](#)