




LOC	DIST	REVISIONS 変更				DATE	DWN	APVD
P	LTR	DESCRIPTION						
J		D1	REVISED PER ECO-11-005030				11MAR11	RK HMR

-1, -2; AS SHOWN

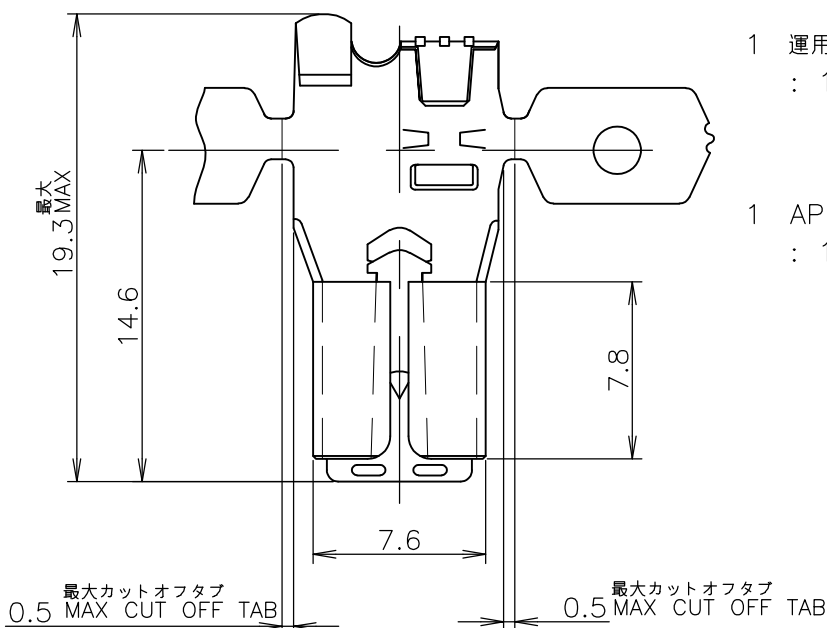


1 運用スリーブ型番
: 1717268-X, 176497-X, 2013799-X


1 APPLICABLE SLEEVE P/N
: 1717268-X, 176497-X, 2013799-X

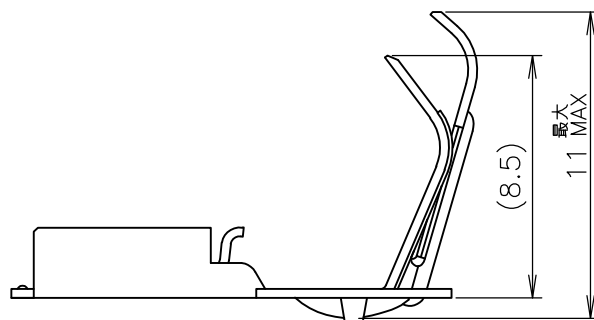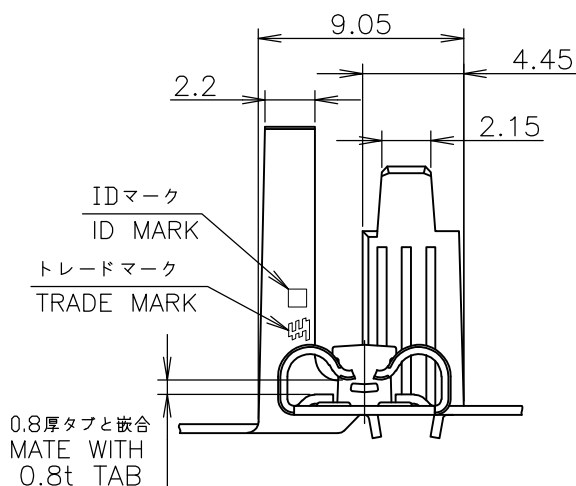

LOOSE PIECE NO. ばら状端子型番	PRE TIN COPPER ALLOY 0.4t 錫めっき付銅合金 0.4t	175057-2
	PRE TIN BRASS 0.4t 錫めっき付 黄銅 0.4t	175057-1
	MATERIAL 材料	P/N 型番

WIRE RANGE 抱合電線断面積	AWG #18-#12 0.75~3.37 mm ²	INSULATION DIA 被覆外径	2.8~4.1 mmφ
-----------------------	--	------------------------	-------------

DIMENSIONS: 単位： 耗 mm	DWN J.SATO	15NOV2007	MATERIAL 材料 表参照 SEE TABLE		FINISH 仕上	
	CHK S.MANABE	15NOV2007	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD S.MANABE	15NOV2007				
0 PLC ± 1 PLC ± 10 ≥: ±0.2 2 PLC ± 30 ≥ > 10: ±0.25 3 PLC ± 100 ≥ > 30: ±0.3 4 PLC ± ANGLES ± 3°	PRODUCT SPEC 製品規格 108-5254		NAME 名称 250 SERIES FLAG POSITIVE LOCK EX 250 シリーズ 旗型ポジティブロックEX			
	APPLICATION SPEC 取付適用規格 114-5122					
	WEIGHT		SIZE A4	CAGE CODE 00779	DRAWING NO 番号 C-175057	RESTRICTED TO —
	CUSTOMER DRAWING		SCALE 尺度 NTS	SHEET 1 of 1	REV D1	
						



RELEASED FOR PUBLICATION NOV , 2007.

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

COPYRIGHT 2007 By -

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[175057-1](#)