

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	NEW DRAWING	14OCT2014	RK	PL
	B	PIN POS. TOLERANCE EXTENSION, SOLDERING CLARIFICATION	03JUN2015	RK	PL
	C	PIN CONTACT PLATING UPDATED	15JUL2019	FP	FP

D

C

B




A

D

C


B

A

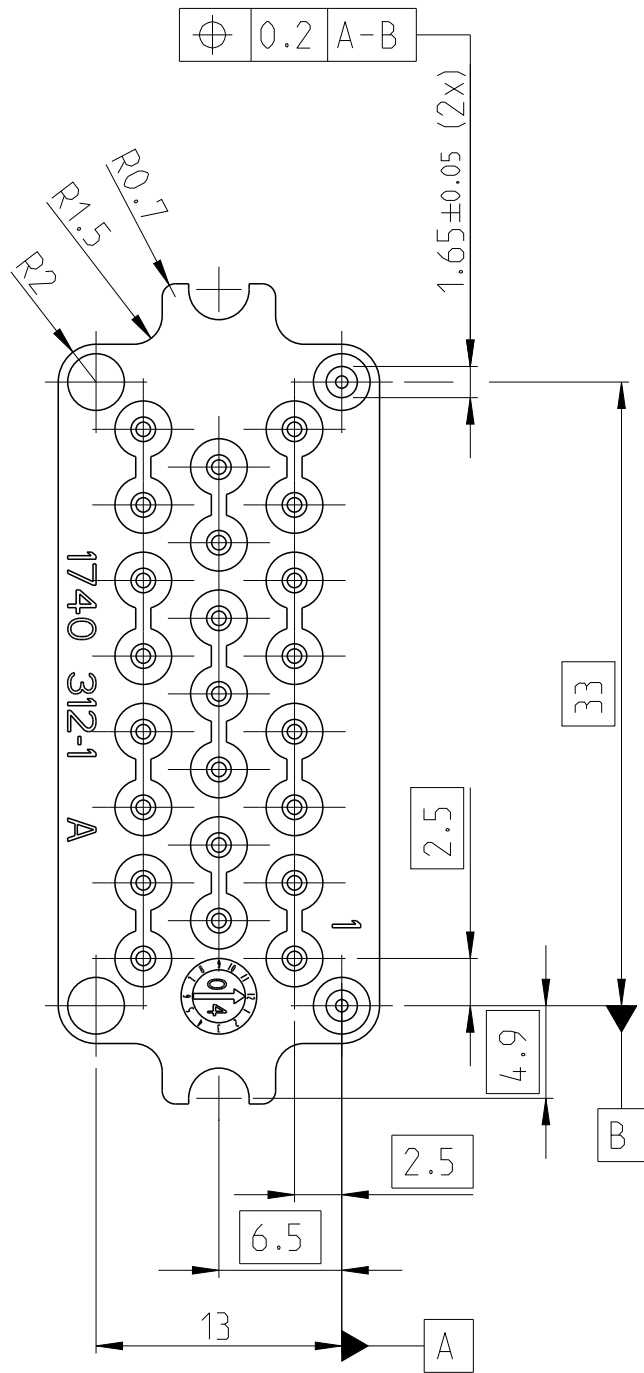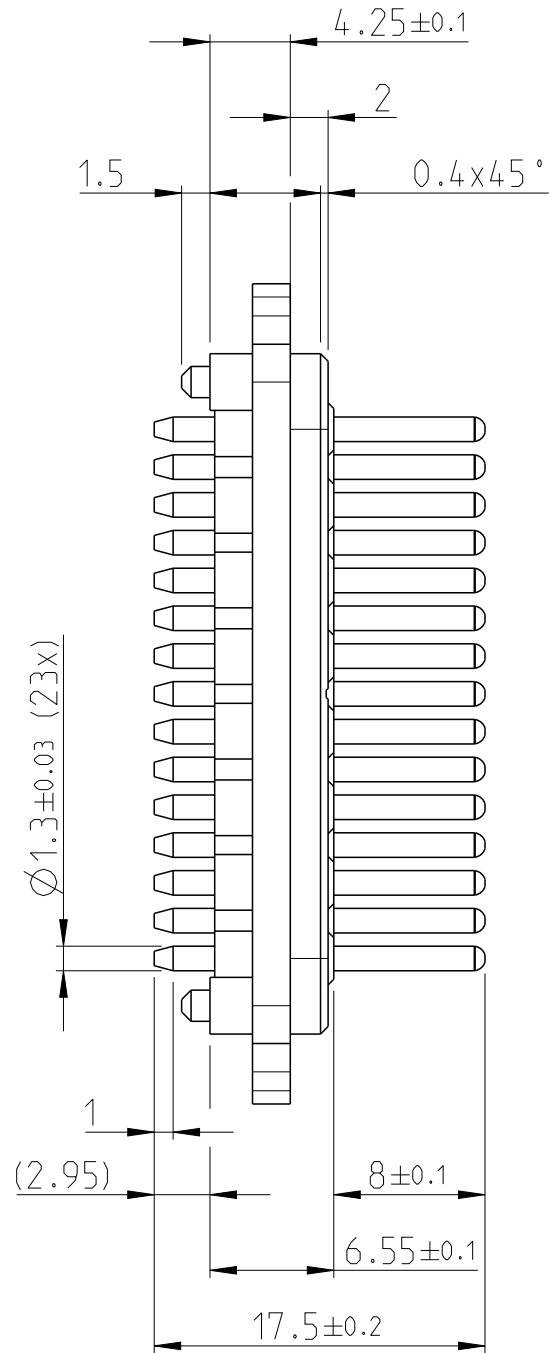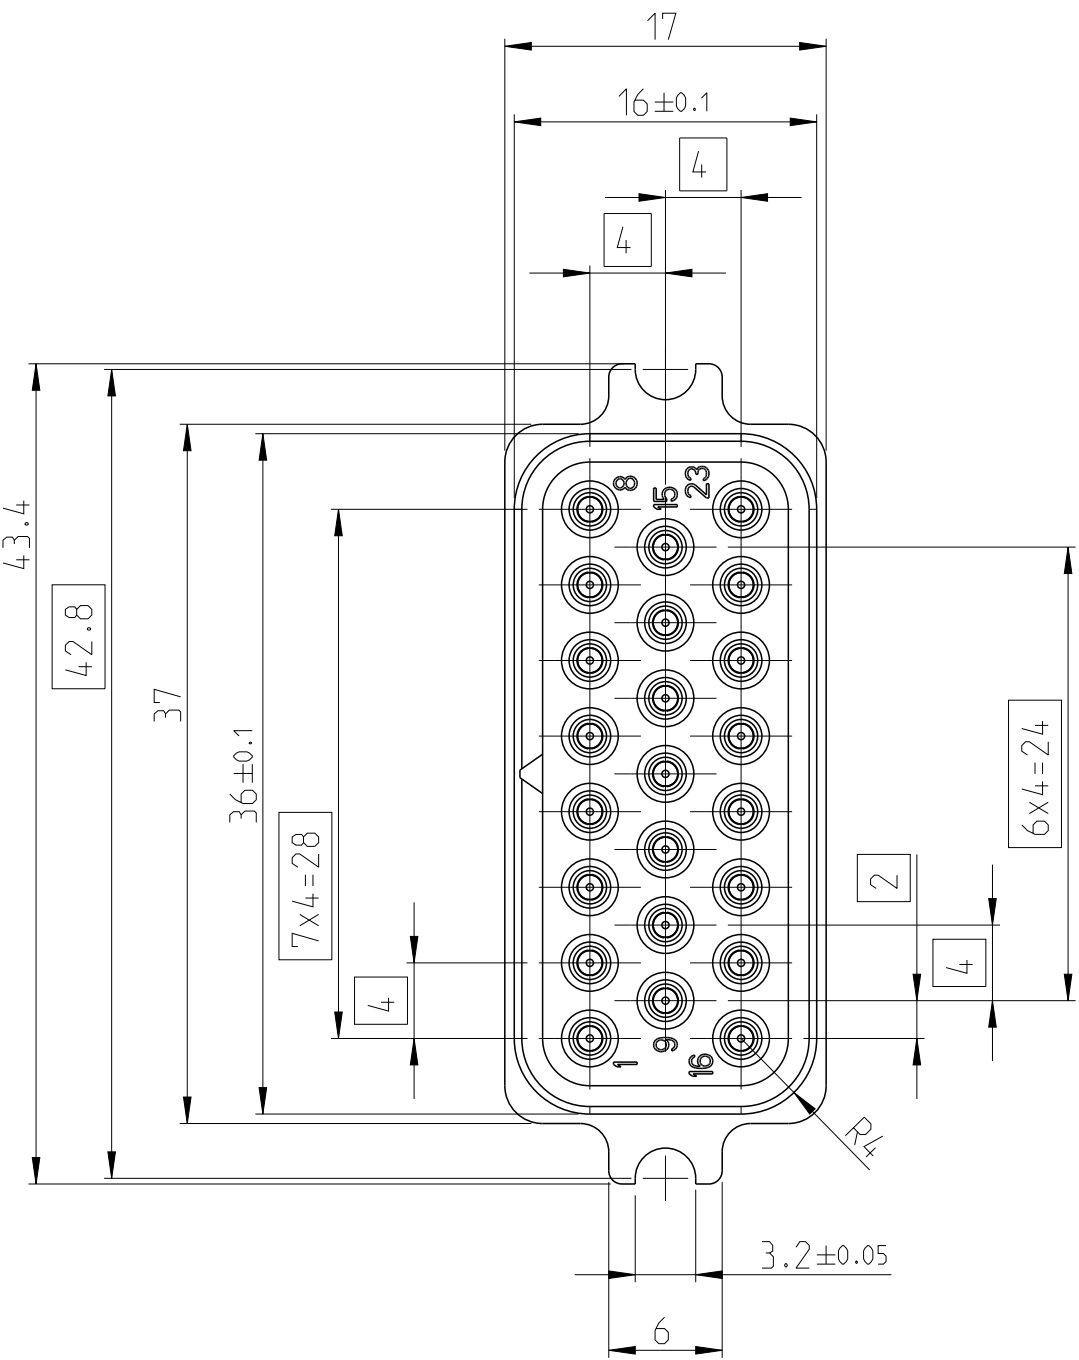


- 1 SURFACE
- 2 PACKAGING:
40 PIN HEADER PACKED IN TRAY
9 TRAYS PACKED INTO SHIPPING BOX
MIN. ORDER QTY.: 360 PARTS
- 3 ALL 17.2 DIMENSIONS 0.2 A-B
- 4 NOT SPECIFIED DIMENSIONS ACC. 3D-MODEL:
2120833-1
- 5 ONLY WAVE SOLDER CAPABLE TO 240° C

- 1 BESCHICHTUNG
- 2 VERPACKUNG:
40 STIFTSTECKER IN PRODUKTTRAEGER VERPACKT
9 PRODUKTTRAEGER VERPACKT IN KARTON
MINDESTBESTELLMENGE: 360 TEILE
- 3 ALL 17.2 MASSE 0.2 A-B
- 4 NICHT SPEZIFIZIERTE MASSE ENTSPRECHEND 3D MODELL:
2120833-1
- 5 NUR WELLEN LOETFÄHIGKEIT BIS MAX. 240° C

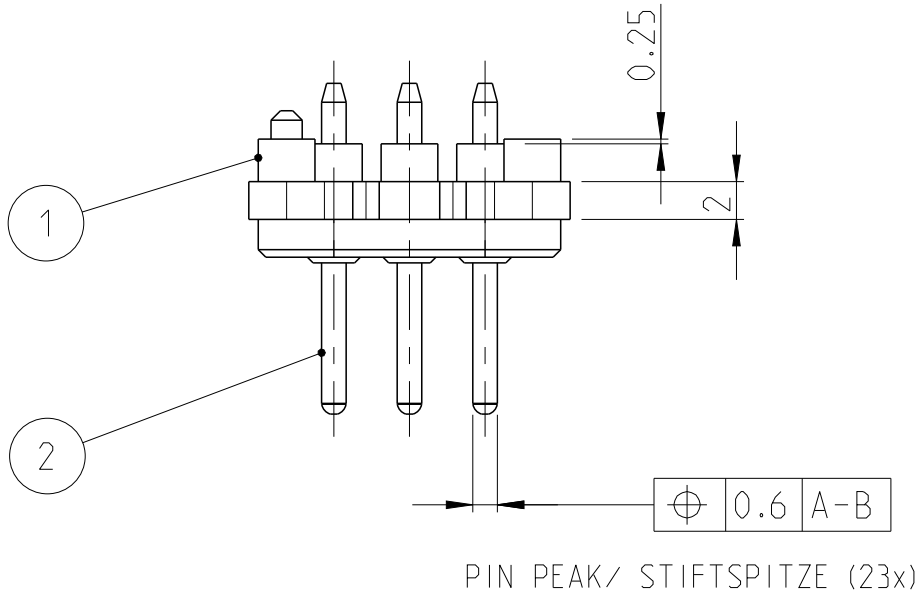


RECOMMENDED PC-BOARD LAYOUT
EMPFOHLENES LEITERPLATTENLAYOUT (3:2)

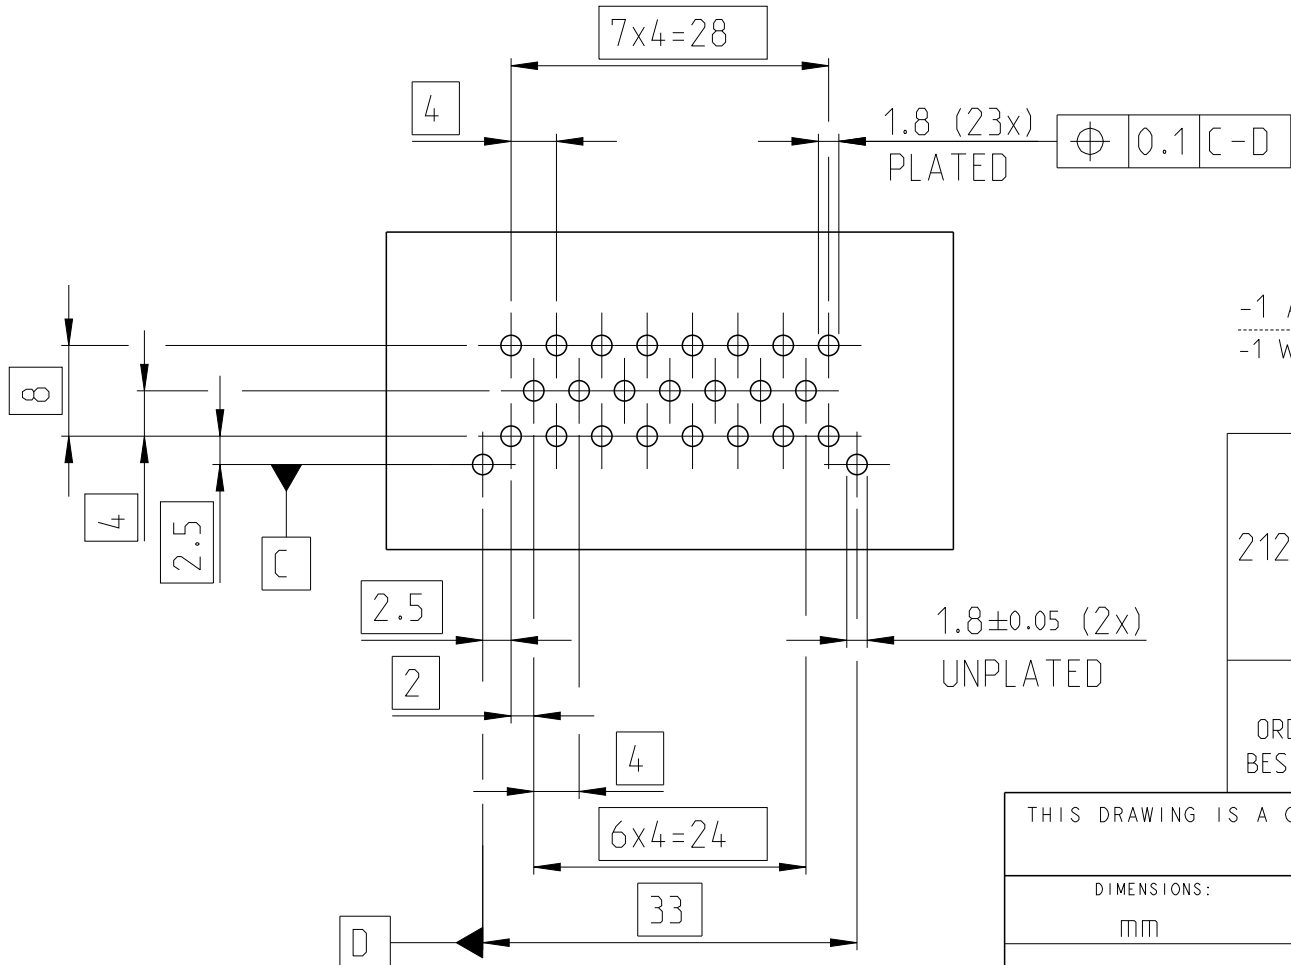


-1 AS SHOWN
-1 WIE GEZEICHNET

SCALE / M1:1



INSTALLATION HEIGHT OF PIN HEADER FOR SAFE CONTACTING WITH SOCKET CONNECTOR
EINBAUHOEHE DER STIFTLISTE FUER SICHERE KONTAKTIERUNG MIT BUCHSENSTECKER

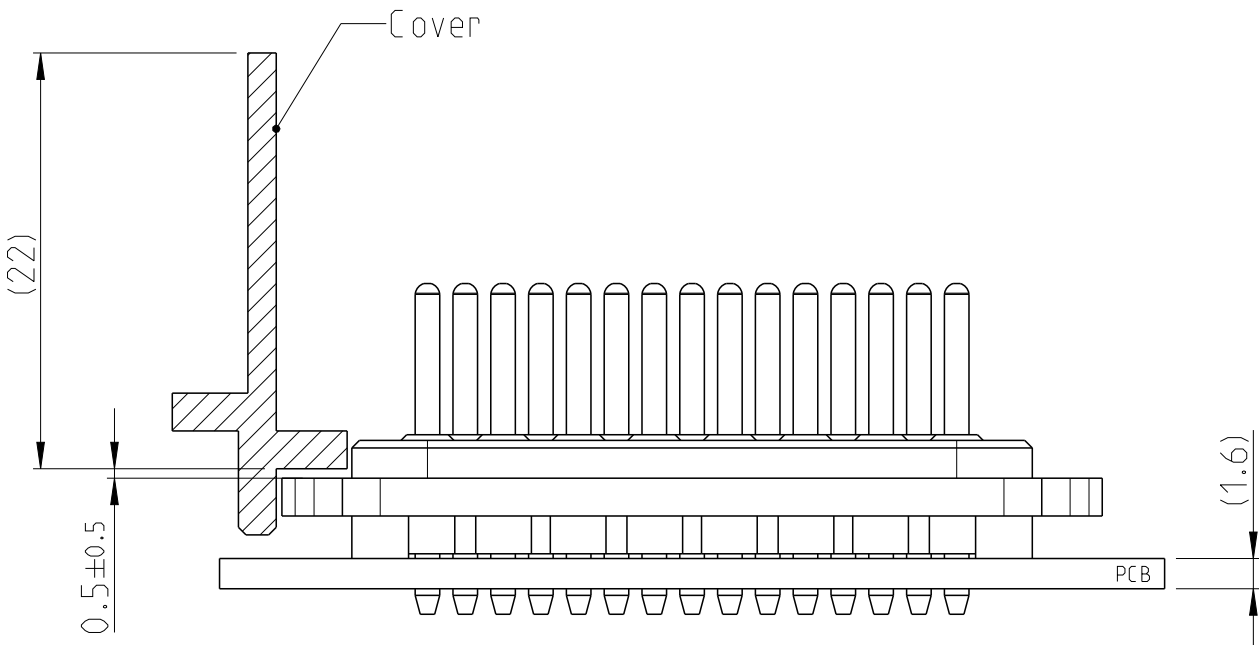

2120833-1	2	23	PIN STIFT	CONTACT AREA: AU OVER NI SOLDER AREA: Tin over Ni KONTAKTZONE: AU UEBER NI LOETZONE: Zin ueber Ni	1		BRASS MESSING	
	1	1	PIN HOUSING 23 POS. STIFTGEHAUSE 23 POL.	BLACK SCHWARZ	PA66-GF25			
TE ORDER NO. BESTELL-NR.	POS.	QTY. STK.	DESCRIPTION BENENNUNG	SURFACE OBERFLAECHE	MATERIAL			
				COLOUR/FARBE				
S A CONTROLLED DOCUMENT.			DWN RAVINDRA K	14OCT2014	TE Connectivity			
			CHK P. LERCHENFELD	14OCT2014				
TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD P. LERCHENFELD	14OCT2014	NAME AMPSEAL PIN HEADER - 23 POS. AMPSEAL STIFTLISTE - 23 POL.	-		
			PRODUCT SPEC					
0 PLC ±0.2			-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
1 PLC ±0.2			APPLICATION SPEC					
2 PLC ±0.2			-		A200779 ©=2120833			
3 PLC ±			-					
4 PLC ±			-		SCALE 5:2			
ANGLES ±°			-					
FINISH			WEIGHT 7.6g		SHEET 1 OF 1		REV C	
			CUSTOMER DRAWING					