




Quick Coupling with an Internationally Used Profile, Series 20 | #20KAAM05MPN

 [View Series Page](#)

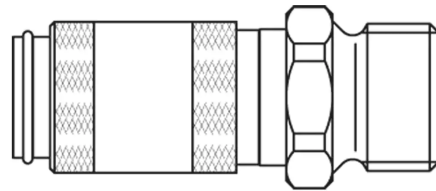

Local Contact

Parker Hannifin Manufacturing France SAS

Low Pressure Connectors Europe Division

Parc Alcyone - Bat. D

1 rue André et Yvonne Meynier

CS 46911

35069 Rennes Cedex

France

Get your Parker account Today!

Create one account to manage everything you do with Parker, from your shopping preferences to your application access.

[Register now](#)

Quick coupling system with nominal diameter 2.5 for pneumatic and fluid handling applications up to 35 bar. Coupling system with an internationally used profile. Available made of brass or stainless steel.

[Share / Email](#)

Technical Specifications

Connection Thread Size (mm):

5

Hose I.D. (mm):

na

External Hex (mm):

9

Version:

Single Shut-Off

Material:

Brass nickel plated

Connection Type:

Male Thread - metric

Type:

Coupling

Connection Thread Size (inch):

na

Diameter:

2,7 nom

Valve Included:

Yes

Length:

26 mm

Outside Diameter:

10 mm

Seal Material:

NBR

Minimum Operating Temperature:

-20 °C

Maximum Operating Temperature:

100 °C

Maximum Operating Pressure:

35 bar

Flow Rate:

165 L/min

Application:

Pneumatic & Fluid Handling



California Residents: Prop-65 Warning

 **Safety Warning**

Item Information

Parker's Series 20 is a mini industrial coupling with internationally used profile. It's especially suitable for use in medical technology and chemistry/pharmacy.

The coupling system is developed for single-hand operation. This series has a high flow rate despite its small dimensions, it can be used in various applications and a variety of different media.

Markets:

- Industrial

- Life Sciences

CAD Drawings + Files

[Open CAD Viewer](#)
