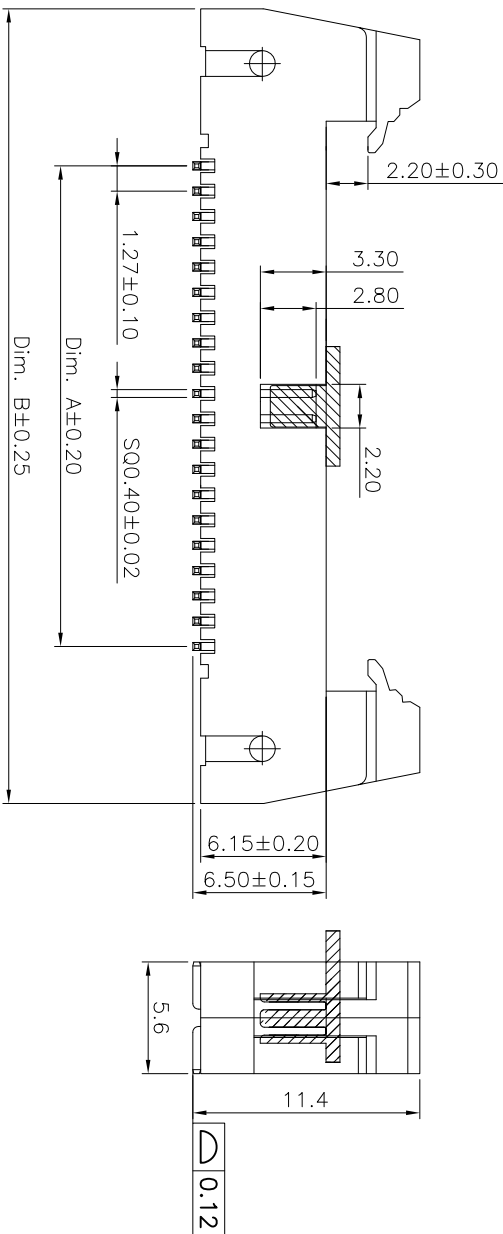
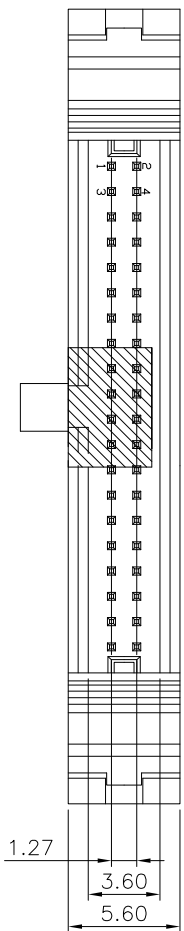


→

2546

Circuits	DIM		Circuits	DIM	
	A	B		A	B
6	2.54	18.16	34	20.32	35.94
8	3.81	19.43	40	24.13	39.75
10	5.08	20.70	44	26.67	42.29
16	8.89	24.51	50	30.48	46.10
20	11.43	27.05	60	36.83	52.45
26	15.24	30.86	68	41.91	57.53
30	17.78	33.40			

Specifications

Current Rating:1.0A AC,DC

Voltage Rating: 50V AC, DC

Contact Resistance: 20m ohm. Max.

Insulation Resistance:1,000M ohm. Min.

Withstanding Voltage: 500V AC/minute.

Operating Temperature Range: -40°C to $+105^{\circ}\text{C}$

Materials:

Insulator:Nylon 9T(UL94V-0)




Insulator Color:Black

Contact: Brass

Plating: Gold Plated

MATING PART
3230-XX-0101-00

MATING PART
3230-XX-0102-00

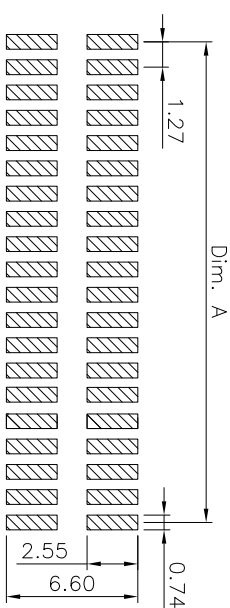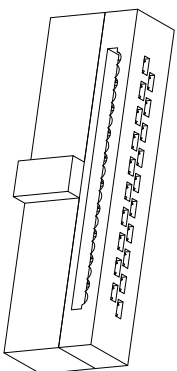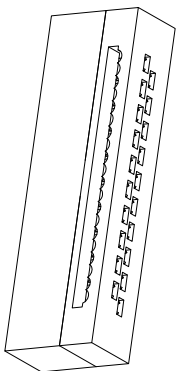

PCB Layout

RoHS Compliant

CnC Tech

Industrial Cable and Connector Technology

DESCRIPTION:

1.27mm Shrouded Header SMD Type

SIZE

A4

DRAWN:

CHECKED:

APPROVAL:

GENERAL TOLERANCE:

$$.X = \pm 0.20$$
$$.XX = \pm 0.15$$

UNIT: MM

SCALE:1:1

SHEET: 1 / 1

PROJECTION:



PART NO:

3210-XX-003-12-00-TR