
THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION							
REV.	DESCRIPTION	DATE	APPROVED				
В	Updated Specifications	10-04-11	LY				
С	Graphics and Notes Update	02-09-12	LY				

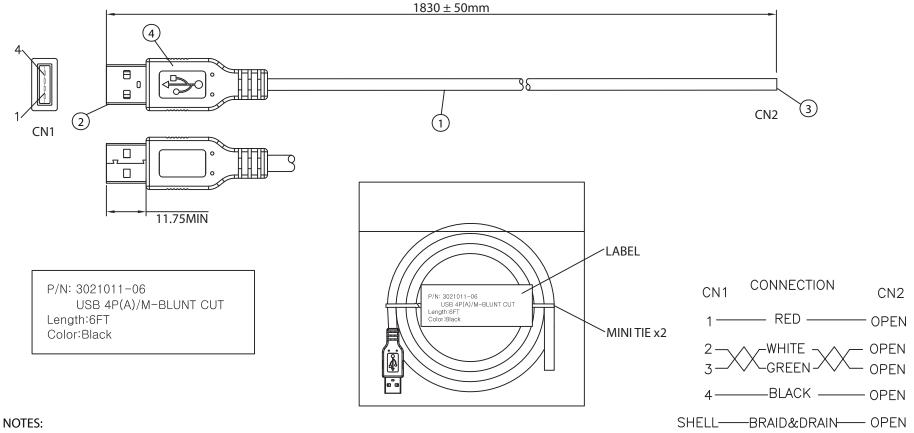

1. CABLE: UL2725 26/28AWG

28AWGx1P+26AWGx2C+ AEB(AL) 65% OUTER JACKET: BLACK, OD: 4.2 ± 0.2 mm

2. CONNECTOR: USB A TYPE MALE

INSULATOR: WHITE PBT

PIN G/F

NICKEL PLATED SHELL

- 3. BLUNT CUT
- 4. PVC MOLDED: COLOR V398 45P BLACK
- 5. ELECTRICAL TEST:
 - <1>.100% OPEN SHORT & MISS WIRE TEST
 - <2>.INSULATION RESISTANCE: DC400V 10M ohm MIN.
 - <3>.CONDUCTOR RESISTANCE: 3 ohm MAX.
- 6. PACKING: 1PC/POLYBAG W/ LABEL

CONTROLLED

	Dim range	Tolerance +/-	Qualtek Electronics Corp. WCI DIVISION		
L	(mm)	(mm)	Part Number: 30	21011-06	RoHS ompliant
	0-1	0.15	Description: USB 4P(A)/M - BLUNT CUT		
	1-6	0.20			
Γ	6-18	0.30		LINIT	DEV. C
	18-50	0.50		UNIT: mm	REV. C
	50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
	120-250	0.90	B. Grubb	01-26-07	JJH / 01-26-07
	250-500	1.20	01-26-07	01 20-07	33117 01 20 07