


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
	U	REVISED PER ECR-13-001204		19JUN13	KH	PD

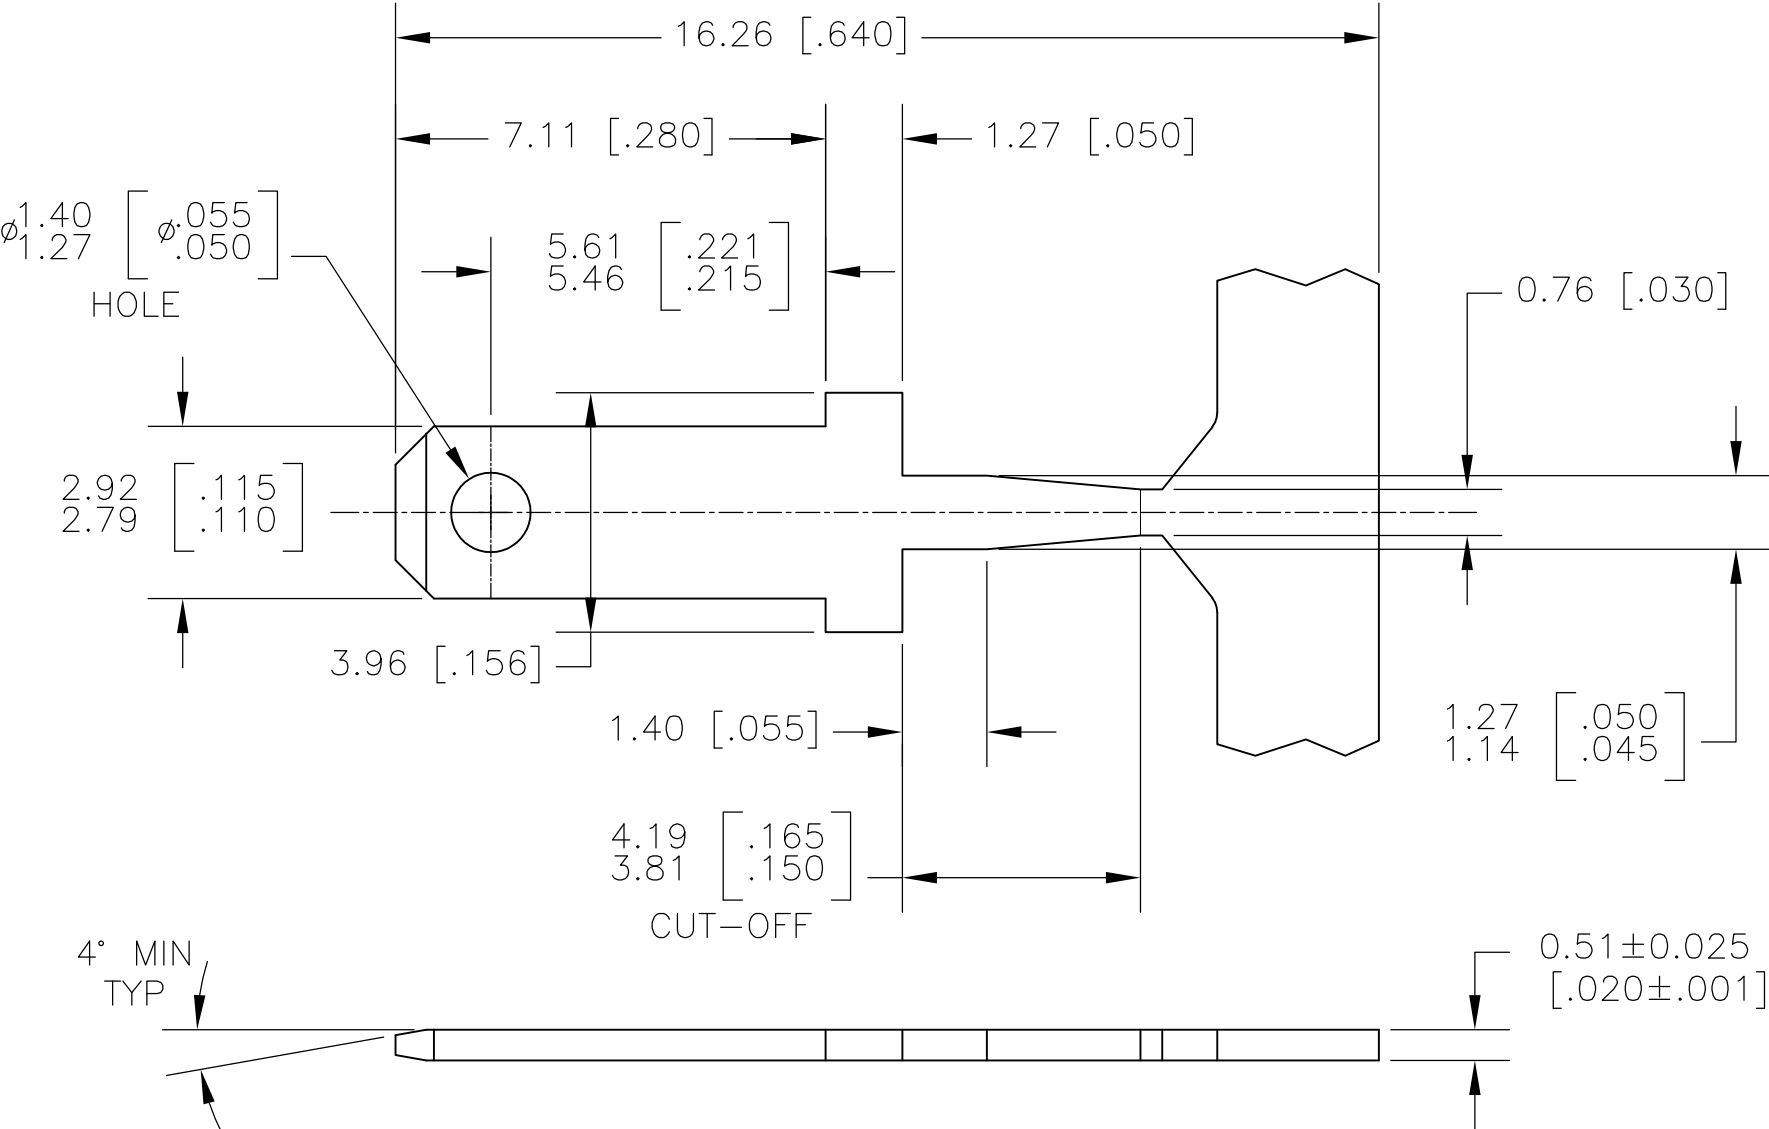

- 1 CONTINUOUS STRIP ON REELS
- 2 PART TO MEET AMP
SOLDERABILITY SPEC 109-11-2
(MILDLY ACTIVATED ROSIN)
- 3 FITS 1.22/1.11 [.048/.044] DIA
HOLE IN PC BOARD. WHEN
PLATED THRU HOLES ARE TO
BE USED, ADJUSTMENT TO HOLE
DIA'S SHOULD BE MADE TO
ALLOW FOR THE PLATING.
- 4 PRELIMINARY - NOT FOR
PRODUCTION, TO BE REELED ON
PLASTIC REELS.
- 5 SPLICE FREE REELING.
- 6 0.00381 [.000150] MIN TIN OVER
0.00254 [.000100] MIN COPPER.
- 7 0.00381 [.000050] MIN TIN OVER
COPPER.
- 8 OBSOLETE PARTS: OBSOLETE CIS
STREAMLINING PER D.RENAUD/D.SINISI

SUPERSEDED BY 62395-1	8 OBSOLETE	6	5	62395-4
		6	4	62395-3
		7	2	62395-2
		6		62395-1
		FINISH		PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM [INCHES]

MATERIAL
BRASS

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± 0.25 [.010]
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH
SEE TABLE

DWN
JR RUTH
12DEC00

CHK
MS FEHER
12DEC00

APVD
G PORTA
12DEC00

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

TE Connectivity

TAB, FASTON,
PC BOARD,
2.79 [.110] SERIES

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-62395

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
8:1

SHEET
1 OF 1

REV
U

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[62395-1 \(MOUSER REEL\)](#) [62395-1 \(CUT STRIP\)](#)