


SPECIFICATIONS:

ELECTRICAL:	
INSULATION RESISTANCE:	5 GΩ MIN.
DIELECTRIC WITHSTANDING VOLTAGE:	1000 VAC FOR 1 MIN
OPERATING TEMPERATURE:	-55°C TO +125°C
CONTACT RESISTANCE:	10 mΩ MAX.
CONTACT AMPERAGE:	3 AMPS
MATERIALS:	
CONTACTS:	BRASS, SEE P/N KEY FOR PLATING
INSULATOR:	PA6T, UL94 V-0 RATED, BLACK 260°C PROCESS TEMP.
SHELL:	NICKEL PLATED STEEL
HARDWARE:	ZINC PLATED STEEL

"14" BRACKET OPTION SHOWN BELOW

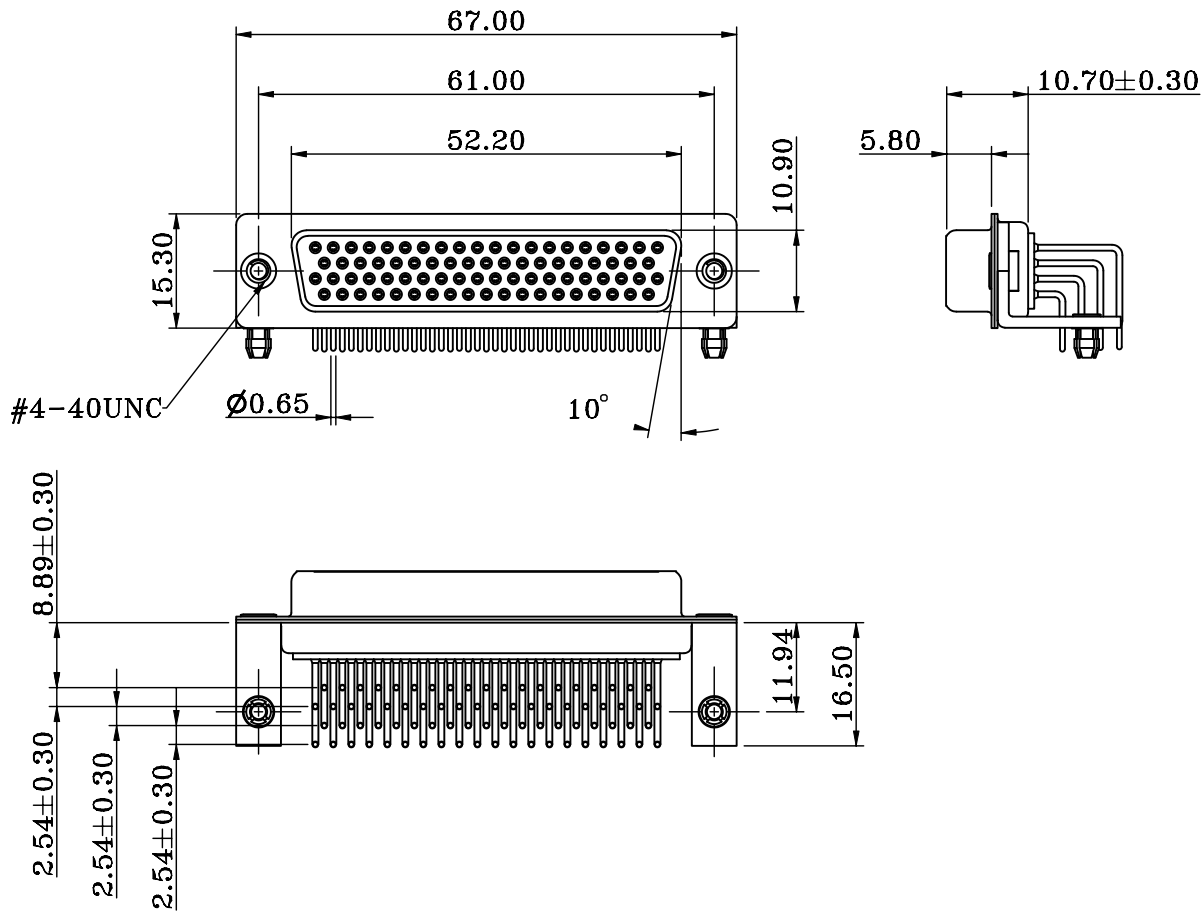

181-M78-213RYYY

SERIES _____
MACHINED CONTACTS _____
POSITIONS _____
78 _____
GENDER _____
2 = FEMALE _____
TERMINATION _____
1 = RIGHT ANGLE _____
SHELL PLATING _____
3 = NICKEL _____
HARDWARE OPTIONS _____
00 = NO HARDWARE, Ø.120" HOLE _____
14 = BRACKET WITH #4-40 INSERT, BOARD LOCK _____
PLATING OPTIONS _____
1 = GOLD FLASH, ENTIRE CONTACT _____
2 = 30u" GOLD, ENTIRE CONTACT _____

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

12/19/2022

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

OF

1


2

REV

1

DWG NO.

181-M78-213RYYY

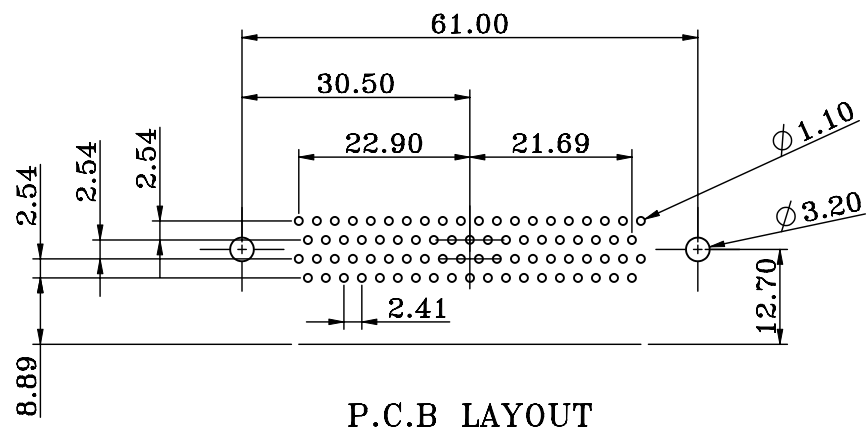

P.C.B LAYOUT

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

12/19/2022

NorComp

SCALE:

NTS

SHEET

OF

2

2

REV

1

DWG NO.

181-M78-213RYYY

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[181-M78-213R001](#) [181-M78-213R141](#)